



**PROMAX**

**2026**

**PRODUCT CATALOGUE**

# INDEX



**PROMAX**





## BRAKE SYSTEM

|                       |    |
|-----------------------|----|
| Hydraulic Disc Brake  | 01 |
| Mechanical Disc Brake | 07 |
| Rim Brake             | 09 |
| Brake Lever           | 16 |

## HUB

23

## SKEWER

28

## SEAT POST

|             |    |
|-------------|----|
| Dropper     | 30 |
| Dual Bolts  | 31 |
| Single Bolt | 35 |
| Suspension  | 36 |
| Regular     | 38 |

## SEAT CLAMP

39

## STEM

|                       |    |
|-----------------------|----|
| 3D Forged Ahead Stem  | 45 |
| Ahead Stem            | 51 |
| Adjustable Ahead Stem | 53 |
| Adjustable Quill Stem | 59 |
| Quill Stem            | 63 |
| Folding Bike Stem     | 65 |
| BMX Stem              | 66 |

## HANDLEBAR

67

## PARTS & ACCESSORIES

|                           |    |
|---------------------------|----|
| Rotor Disc & Small Parts  | 75 |
| Disc Brake Pads           | 76 |
| Disc Brake Adapter        | 77 |
| Inner Cable & Small Parts | 78 |
| Outer Casing & Brake Pads | 79 |

\* PROMAX warrants its products to be free from defects in materials or workmanship for a period of two years after original purchase



## DSK-937



### Brake Lever

Reach adjustment  
Aluminum alloy lever and bracket  
Hose joint: banjo

### Caliper

2-pcs aluminum forged alloy caliper body  
4 heat-insulating piston  
Hose joint: banjo  
Compatible with post-mount (Manitou) type  
Adapter available for international standard

### Pads

Top loading  
Shimano M8120 / M7120 / M6120  
PROMAX DSK-930



|                      |                        |
|----------------------|------------------------|
| Fluid:               | Mineral oil            |
| Pad:                 | Sintered               |
| Disc rotor:          | DT-180B (151.6g)       |
| Standard rotor size: | 180mm (front & rear)   |
| Optional rotor size: | 203mm (front & rear)   |
| Weight:              | 285g / wheel           |
| Packing:             | 25pcs / ctn / 1.34cuft |
| Produced in:         | Taiwan                 |

## PD243S



## DSK-930M/DSK-930T



### Brake Lever

Reach adjustment  
Heat-insulating piston  
Aluminum alloy lever and bracket  
Open clamp  
Great modulation with ergonomic lever design  
Using for E-bike (electric bike)  
DSK-930M: 2-finger design  
DSK-930T: 4-finger design

### Caliper

2-pcs aluminum forged alloy caliper body  
4 heat-insulating piston  
Compatible with post-mount (Manitou) type  
Adapter available for international standard

### Pads

Top loading  
Shimano M8120 / M7120 / M6120  
PROMAX DSK-930



DSK-930M



DSK-930T



|                      |                        |
|----------------------|------------------------|
| Fluid:               | Mineral oil            |
| Pad:                 | Sintered               |
| Disc rotor:          | DT-180B (151.6g)       |
| Standard rotor size: | 180mm (front & rear)   |
| Optional rotor size: | 203mm (front & rear)   |
| Weight:              | 271g / wheel           |
| Packing:             | 25pcs / ctn / 1.34cuft |
| Produced in:         | Taiwan                 |

## PD243S







## DSK-930BE



(SENSOR-TYPE E-BIKE HYDRAULIC DISC BRAKE KIT)

## Brake Lever

Reach adjustment  
Heat-insulating piston  
Aluminum alloy lever and brake  
Open clamp  
Great modulation with ergonomic lever design  
Using for E-bike (45km/hr speed pedelec)  
4-finger blade with ball end

## Caliper

2-pcs aluminum forged alloy caliper body  
4 heat-insulating piston  
For 2.3mm thick rotors  
Banjo hose connection  
Compatible with post-mount (Manitou) type  
Adapter available for international standard

## Pads

Top loading  
Shimano M8120 / M7120 / M6120  
PROMAX DSK-930

Fluid: Mineral oil  
Disc rotor: DT-180BE(186.4g)  
Standard rotor size: 180mm (front & rear)  
Optional rotor size: 203mm (front & rear)  
Weight: 328g / wheel  
Packing: 25pcs / ctn / 1.34cuft  
Produced in: Taiwan

## PD243S



## DSK-933



## Brake Lever

Reach adjustment  
Aluminum alloy lever and bracket  
Hose joint: banjo

## Caliper

2-pcs aluminum forged alloy caliper body  
Dual heat-insulating piston  
Hose joint: Straight  
Flat mount type

## Pads

Top loading  
Shimano Deore M395 / M475 / M515 / M525 / C501 / C601  
Promax Solve / Lucid / Decode R / F1 / Solve-ST

Fluid: Mineral oil  
Pad: Sintered  
Disc rotor: DT-160V (124.8g)  
Standard rotor size: 160mm (front & rear)  
Optional rotor size: 140mm (front & rear) / 180mm (front & rear)  
Weight: 236g / wheel  
Packing: 25pcs / ctn / 1.34cuft  
Produced in: Taiwan

## PD099S



FH140F

FH160F

FM160R



DSK-927



DSK-927T



DSK-936



## F1 (DSK-927) F1 (DSK-927T) F1-YST (DSK-936)

### Brake Lever

Reach adjustment  
DSK-927: 2-finger design  
DSK-927T: 3-finger design  
Aluminum alloy lever and bracket  
DSK-936: 2-finger design  
Aluminum alloy bracket and steel lever  
Short-reach 74-80mm  
Designed specifically for junior

### Caliper

2-pcs forged alloy caliper body  
Dual heat-insulating piston  
Hose joint: Straight  
Flat mount type

|                      |                                                |
|----------------------|------------------------------------------------|
| Fluid:               | Mineral oil                                    |
| Pads:                | Sintered                                       |
| Caliper:             | DC-927                                         |
| Disc rotor:          | DT-160H (119.8g)                               |
| Standard rotor size: | 160mm (front & rear)                           |
| Optional rotor size: | 140mm (front & rear)                           |
| Weight:              | DSK-927: 237g / wheel<br>DSK-936: 250g / wheel |
| Packing:             | 25pcs / ctn / 1.34cuft                         |
| Produced in:         | Taiwan                                         |



PD099S



FH140F



FH160F



FM160R

## DSK-938



### Brake Lever

Reach adjustment  
Aluminum alloy lever and bracket  
Hose joint: banjo

### Caliper

2-pcs forged alloy caliper body  
Dual heat-insulating piston  
Hose joint: Straight  
Compatible with post-mount (Manitou) type  
Adapter available for international standard

### Pads

Top loading  
Shimano Deore M395 / M475 / M515 / M525 / C501 / C601  
Promax Solve / Lucid / Decode R / F1 / Solve-ST

Open system  
Easy access bleeding hole

|                      |                        |
|----------------------|------------------------|
| Fluid:               | Mineral oil            |
| Pad:                 | Sintered               |
| Disc rotor:          | DT-160B (130g)         |
| Standard rotor size: | 160mm (front & rear)   |
| Optional rotor size: | 180mm (front & rear)   |
| Weight:              | 236g / wheel           |
| Packing:             | 25pcs / ctn / 1.34cuft |
| Produced in:         | Taiwan                 |



PD099S



## SOLVE (DSK-923/DSK-923S/DSK-923T)

### Brake Lever

Reach adjustment  
Aluminum alloy lever and bracket  
DSK-923: 2-finger design  
DSK-923S: 1-finger design  
DSK-923T: 3-finger design

### Caliper

2-pcs forge alloy caliper body  
Dual heat-insulating piston  
Hose joint: Straight  
Compatible with post-mount (Manitou) type  
Adapter available for international standard



DSK-923



|                      |                                              |
|----------------------|----------------------------------------------|
| Fluid:               | Mineral oil                                  |
| Pads:                | Sintered                                     |
| Caliper:             | DC-923                                       |
| Disc rotor:          | DT-160H [119.8g]                             |
| Standard rotor size: | 160mm [front & rear]                         |
| Optional rotor size: | 180mm [front & rear]<br>203mm [front & rear] |
| Weight:              | DSK-923: 304g / wheel                        |
| Packing:             | 25pcs / ctn / 1.34cuft                       |
| Produced in:         | Taiwan                                       |



PD099S

## SOLVE-ST (DSK-925)

### Brake Lever

Reach adjustment  
Steel lever  
2-finger design

### Caliper

2-pcs forged alloy caliper body  
Dual heat-insulating piston  
Hose joint: Straight  
Compatible with post-mount (Manitou) type  
Adapter available for international standard



|                      |                                              |
|----------------------|----------------------------------------------|
| Fluid:               | Mineral oil                                  |
| Pads:                | Sintered                                     |
| Caliper:             | DC-925                                       |
| Disc rotor:          | DT-160H [119.8g]                             |
| Standard rotor size: | 160mm [front & rear]                         |
| Optional rotor size: | 180mm [front & rear]<br>203mm [front & rear] |
| Weight:              | 298g / wheel                                 |
| Packing:             | 25pcs / ctn / 1.34cuft                       |
| Produced in:         | Taiwan                                       |



PD099S





## SOLVE-ST (DSK-926)

### Brake Lever

Reach adjustment  
Short-reach 74-80mm  
Aluminum alloy bracket and steel lever  
Designed specifically for junior  
2-finger design

### Caliper

2-pcs forged alloy caliper body  
Dual heat-insulating piston  
Hose joint: Straight  
Compatible with post-mount (Manitou) type  
Adapter available for international standard

Fluid: Mineral oil  
Pads: Sintered  
Caliper: DC-926  
Disc rotor: DT-160H (119.8g)  
Standard rotor size: 160mm (front & rear)  
Optional rotor size: 180mm (front & rear)  
Weight: 298g / wheel  
Packing: 25pcs / ctn / 1.34cuft  
Produced in: Taiwan



PD099S

NEW

## DSK-947

### Brake Lever

Reach adjustment  
Short-reach 74-80mm  
Aluminum alloy bracket and steel lever  
Designed specifically for junior  
2-finger design

### Caliper


2-pcs forged alloy caliper body  
Dual heat-insulating piston  
Hose joint: Straight  
Flat mount type

### Pads

Sintered  
Top loading  
Shimano Deore M395 / M475 / M515 / M525 / C501 / C601

Open system  
Easy access bleeding hole

Fluid: Mineral oil  
Pads: Sintered  
Caliper: DC-927  
Disc rotor: DT-160G (96g) for kids bike  
Standard rotor size: 160mm (front & rear)  
Option rotor size: 140mm(front & rear) / 180mm(front & rear)  
Weight: 236g / wheel  
Packing: 25pcs / ctn / 1.34cuft  
Produced in: Taiwan

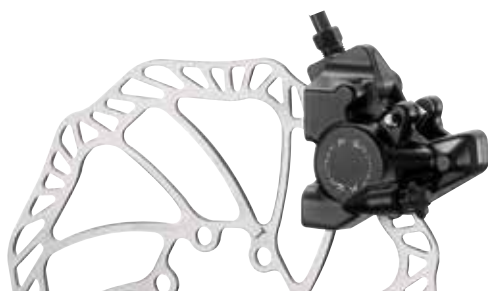

PD099S



FH140F

FH160F

FM160R

**NEW****DSK-949****Brake Lever**

Reach adjustment  
Short-reach 74-80mm  
Aluminum alloy bracket and lever  
Designed specifically for junior  
2-finger design

**Caliper**

2-pcs forged alloy caliper body  
Dual heat-insulating piston  
Hose joint: Straight  
Compatible with post-mount (Manitou) type  
Adapter available for international standard

**Pads**

Sintered  
Shimano Deore M395 / M475 / M515 / M525 / C501 / C601

Open system  
Easy access bleeding hole

|                      |                                           |
|----------------------|-------------------------------------------|
| Fluid:               | Mineral oil                               |
| Pads:                | Sintered                                  |
| Caliper:             | DC-923                                    |
| Disc rotor:          | DT-160G (96g) for kids bike               |
| Standard rotor size: | 160mm [front & rear]                      |
| Option rotor size:   | 140mm(front & rear) / 180mm(front & rear) |
| Weight:              | 298g / wheel                              |
| Packing:             | 25pcs / ctn / 1.34cuft                    |
| Produced in:         | Taiwan                                    |

Ø19mm  
Bracket clamp

**PD099S****DSK-940****Brake Lever**

Reach adjustment  
Short-reach 74-80mm  
Aluminum alloy bracket and steel lever  
Designed specifically for junior  
2-finger design

**Caliper**

2-pcs forged alloy caliper body  
Dual heat-insulating piston  
Hose joint: Straight  
Compatible with post-mount(Manitou) type  
Adapter available for international standard

**Pads**

Top loading  
Shimano M395 / M475 / M515 / M525 / C501 / C601  
Promax Solve / Lucid / Decode R / F1 / Solve-ST

Open system  
Easy access bleeding hole

|                      |                             |
|----------------------|-----------------------------|
| Fluid:               | Mineral oil                 |
| Pads:                | Sintered                    |
| Caliper:             | DC-925                      |
| Disc rotor:          | DT-160G (96g) for kids bike |
| Standard rotor size: | 160mm [front & rear]        |
| Weight:              | 298g / wheel                |
| Packing:             | 25pcs / ctn / 1.34cuft      |
| Produced in:         | Taiwan                      |

Ø19mm  
Bracket clamp

**PD099S**

BRAKE SYSTEM

HUB

SKEWER

SEAT POST

SEAT CLAMP

STEM

HANDLEBAR

PARTS &amp; ACCESSORIES



DSK-920M



DSK-920T



DSK-717



DSK-717R

## LUCID (DSK-920M/DSK-920T) (SENSOR-TYPE E-BIKE HYDRAULIC DISC BRAKE KIT)

### Brake Lever

Reach adjustment  
Aluminum alloy lever and bracket  
Open clamp  
Using for E-bike (electric bike)  
DSK-920M : 2-finger design  
DSK-920T : 4-finger design

### Caliper

2-pcs forged alloy caliper body  
Dual heat-insulating piston  
Hose joint: banjo  
Compatible with post-mount (Manitou) type  
Adapter available for international standard

|                      |                                                    |
|----------------------|----------------------------------------------------|
| Fluid:               | Mineral oil                                        |
| Pads:                | Sintered                                           |
| Caliper:             | DC-920                                             |
| Disc rotor:          | DT-160B (130g)<br>DT-160BE(165.6g) for E-bike      |
| Standard rotor size: | 160mm [front & rear]                               |
| Optional rotor size: | 180mm [front & rear]<br>203mm [front & rear]       |
| Weight:              | DSK-920M: 312g / wheel<br>DSK-920T: 311.4g / wheel |
| Packing:             | 25pcs / ctn / 1.34cuft                             |
| Produced in:         | Taiwan                                             |



PD099S

\*DT-160BE / DT-180BE / DT-203BE Rotor thickness: 2.3mm

## DECODE R (DSK-718R) (DUAL OPPOSED PISTON CALIPER)

Barrel cable adjuster design  
Flat-Mount type for Road bikes

|                      |                                  |
|----------------------|----------------------------------|
| Material:            | Aluminum [swing arm & body]      |
| Pads:                | Sintered                         |
| Caliper:             | DC-718R                          |
| Disc rotor:          | DT-160H (119.8g)                 |
| Standard rotor size: | 160mm [front & rear]             |
| Optional rotor size: | 140mm [rear]                     |
| Weight:              | 148g (includes Caliper / Screws) |
| Packing:             | 25pcs / ctn / 0.5cuft            |
| Produced in:         | Taiwan                           |



PD099S



FM160F



FM160R

## RENDER (DSK-717) MTB RENDER R (DSK-717R) ROAD

The custom bolt on DSK-717 / DSK-717R swing arm that locks the brake cable can be easily adjusted by 5mm Allen key or 10mm hex wrench when installing the brake caliper on chain stay or seat stay disc brake mounts.  
Dual pad adjustment with one inboard pad adjustment knob and barrel cable adjuster  
Post-Mount type (Int'l Std. adapter available)

|                      |                                                                               |
|----------------------|-------------------------------------------------------------------------------|
| Material:            | Aluminum (swing arm & body)                                                   |
| Pads:                | Sintered                                                                      |
| Caliper:             | DC-717 / DC-717R                                                              |
| Disc rotor:          | DT-160H (119.8g)                                                              |
| Standard rotor size: | 160mm (front & rear)                                                          |
| Optional rotor size: | RENDER: 180mm (front & rear) / 203mm (front & rear)<br>RENDER R: 140mm (rear) |
| Weight:              | 160g (Caliper)                                                                |
| Packing:             | 25pcs / ctn / 0.5cuft                                                         |
| Produced in:         | Taiwan                                                                        |



PD071S



DSK-400



DSK-420



DSK-330



DSK-330R



DSK-300



DSK-300R

**DSK-400/DSK-420****(MECHANICAL FLOATING DISC BRAKE)**

Adjusting for caliper and rotor alignment can sometimes be a pain. To address this issue, Promax has adopted a tool-free "floating feature" in its DSK-400 disc brake to realize a convenient micro-adjust feature so its users can quickly adjust the brake system with ease.

Tool-free caliper adjustment knob

One inboard pad adjustment knob

DSK-420: Special for Tri-cycle & Wheel Chair

International standard

|                             |                              |
|-----------------------------|------------------------------|
| <b>Pads:</b>                | Sintered                     |
| <b>Caliper:</b>             | DC-400 / DC-420              |
| <b>Disc rotor:</b>          | DT-160H (119.8g)             |
| <b>Standard rotor size:</b> | 160mm (front & rear)         |
| <b>Optional rotor size:</b> | DSK400: 180mm (front)        |
|                             | DSK420: 160mm (front & rear) |
| <b>Weight:</b>              | 216g (Caliper)               |
| <b>Finish:</b>              | Black                        |
| <b>Packing:</b>             | 25pcs / ctn / 0.5cuft        |
| <b>Produced in:</b>         | China                        |

**PD065**

TOOL FREE  
Pad adjustment knob

**DSK-330 MTB**  
**DSK-330R ROAD**

One inboard pad adjustment (5mm Allen key) and barrel cable adjuster design  
Flat-Mount type

|                             |                                  |
|-----------------------------|----------------------------------|
| <b>Material:</b>            | Aluminum [swing arm & body]      |
| <b>Pads:</b>                | Sintered                         |
| <b>Caliper:</b>             | DC-330R                          |
| <b>Disc rotor:</b>          | DT-160H [119.8g]                 |
| <b>Standard rotor size:</b> | 160mm [front & rear]             |
| <b>Optional rotor size:</b> | 140mm [rear]                     |
| <b>Weight:</b>              | 128g (includes Caliper / Screws) |
| <b>Finish:</b>              | DSK-330: ED Black                |
|                             | DSK-330R: Painting               |
| <b>Packing:</b>             | 25pcs / ctn / 0.5cuft            |
| <b>Produced in:</b>         | Taiwan                           |

**PD071S**

FM160F



FM160R

**DSK-300 MTB**  
**DSK-300R ROAD**

One inboard pad adjustment (5mm allen key) and barrel cable adjuster design  
Post-Mount type (Int'l Std. adapter available)

|                             |                             |
|-----------------------------|-----------------------------|
| <b>Material:</b>            | Aluminum [swing arm & body] |
| <b>Pads:</b>                | Sintered                    |
| <b>Caliper:</b>             | DC-300 / DC-300R            |
| <b>Disc rotor:</b>          | DT-160G [96g] for kids bike |
|                             | DT-160H [119.8g] for E-bike |
| <b>Standard rotor size:</b> | 160mm [front & rear]        |
| <b>Optional rotor size:</b> | 140mm [front & rear]        |
|                             | 180mm [front & rear]        |
|                             | 203mm [front & rear]        |
| <b>Weight:</b>              | 135g (Caliper / Screws)     |
| <b>Packing:</b>             | 25pcs / ctn / 0.5cuft       |
| <b>Produced in:</b>         | Taiwan                      |

**PD071S**





## DSK-290

|                      |                                                                      |
|----------------------|----------------------------------------------------------------------|
| Material:            | Aluminum (swing arm & body)                                          |
| Pads:                | Sintered                                                             |
| Caliper:             | DC290                                                                |
| Disc rotor:          | DT-160V (118.6g)                                                     |
| Standard rotor size: | 160mm (front & rear)                                                 |
| Option rotor size:   | 140mm (front & rear)<br>180mm (front & rear)<br>203mm (front & rear) |
| Weight:              | 189.2g (includes caliper & screws)                                   |
| Packing:             | 50pcs / ctn / 1.0cuf                                                 |
| Produced in:         | China                                                                |

## RC-902

### (HYDRAULIC RIM BRAKE)

Direct mount with booster  
Easy pad replacement  
Pad angle adjustment

#### Brake Lever

Right-hand only  
4 finger design / RC-902T

Compatible with Shimano NEXUS gear shifter

|              |                             |
|--------------|-----------------------------|
| Material:    | Aluminum alloy caliper body |
| Fluid:       | Mineral oil                 |
| Pads:        | Design for HS33 pad         |
| Weight:      | 301g                        |
| Finish:      | Anodized / S.B.Color        |
| Packing:     | 25pcs / ctn / 0.5cuf        |
| Produced in: | Taiwan                      |



## RC-903

### (HYDRAULIC RIM BRAKE)

Direct mount with booster  
Easy pad replacement  
Pad angle adjustment

#### Brake Lever

4 finger design / DSK-920T

|              |                                     |
|--------------|-------------------------------------|
| Material:    | Casting aluminum alloy caliper body |
| Pads:        | Design for HS33 pad                 |
| Weight:      | 283g                                |
| Finish:      | Black                               |
| Packing:     | 25pcs / ctn / 0.5cuf                |
| Produced in: | Taiwan                              |





Option: UN-102 Alloy swivel universal link

### TX-131

30mm vertical adjustable range for brake shoes  
Dual linear spring tension adjuster

|                     |                                    |
|---------------------|------------------------------------|
| <b>Material:</b>    | Forged aluminum alloy caliper body |
| <b>Arm length:</b>  | 108mm                              |
| <b>Pads:</b>        | 73mm adjustable angle: EN288MW     |
| <b>Option:</b>      | 70mm cartridge pads                |
| <b>Weight:</b>      | 193g                               |
| <b>Finish:</b>      | Black / Red / Blue / Gold          |
| <b>Packing:</b>     | 100pcs / ctn / 1.34cuft            |
| <b>Produced in:</b> | Taiwan                             |



TX-123

### TX-123/TX-123D

Dual linear spring tension adjuster

|                     |                                                                    |
|---------------------|--------------------------------------------------------------------|
| <b>Material:</b>    | TX-123: Forged aluminum alloy arms<br>TX-123D: Aluminum alloy arms |
| <b>Arm length:</b>  | 108mm                                                              |
| <b>Pads:</b>        | 70mm adjustable angle: 271MW                                       |
| <b>Option:</b>      | 70mm cartridge pads                                                |
| <b>Weight:</b>      | TX-123: 182g<br>TX-123D: 193g                                      |
| <b>Finish:</b>      | TX-123: Anodized / S.B. color<br>TX-123D: Black / Silver           |
| <b>Packing:</b>     | 100pcs / ctn / 1.34cuft                                            |
| <b>Produced in:</b> | Taiwan: TX-123    China: TX-123D                                   |



TX-121

### TX-121/TX-122

Dual linear spring tension adjuster

|                     |                                      |
|---------------------|--------------------------------------|
| <b>Material:</b>    | Aluminum alloy arms                  |
| <b>Arm length:</b>  | TX-121: 108mm<br>TX-122: 101mm       |
| <b>Weight:</b>      | TX-121: 176g<br>TX-122: 171g         |
| <b>Finish:</b>      | Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 1.34cuft              |
| <b>Produced in:</b> | China                                |



TX-119L

### TX-119L/TX-119C

TX-119L: Dual linear spring tension adjuster  
TX-119C: Dual Coiled spring tension adjuster

|                     |                                      |
|---------------------|--------------------------------------|
| <b>Material:</b>    | Aluminum alloy arms                  |
| <b>Arm length:</b>  | 110mm                                |
| <b>Weight:</b>      | TX-119L: 190g<br>TX-119C: 189g       |
| <b>Finish:</b>      | Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 1.16cuft              |
| <b>Produced in:</b> | China                                |



TX-117

### TX-117/TX-107L/C

TX-117: Dual linear spring tension adjuster  
TX-107L/C: Dual coiled spring tension adjuster

**Material:** Aluminum alloy arms  
**Arm length:** TX-117: 108mm  
TX-107L / C: 101mm  
**Weight:** TX-117: 184g  
TX-107L / C: 184g / 183g  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 100pcs / ctn / 1.34cuft  
**Produced in:** China



### TX-115C

Dual coiled spring tension adjuster

**Material:** Aluminum alloy arms  
**Arm length:** 108mm  
**Weight:** 185g  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 100pcs / ctn / 1.34cuft  
**Produced in:** China



### MV-92C

Dual coiled spring tension adjuster

**Material:** Aluminum alloy arms  
**Arm length:** 95mm  
**Weight:** 172g  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 100pcs / ctn / 1.16cuft  
**Produced in:** China



### TX-125L **FOR CRUISER**

Dual linear spring tension adjuster

**Material:** Aluminum alloy arms  
**Arm length:** 125mm  
**Pads:** 60mm adjustable angle: 260MW  
**Weight:** 201g  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 100pcs / ctn / 1.34cuft  
**Produced in:** China

**MV-88**

30mm vertical adjustable range for brake shoes  
Dual linear spring tension adjuster

|                    |                                |
|--------------------|--------------------------------|
| <b>Material:</b>   | Forged aluminum alloy arms     |
| <b>Arm length:</b> | 85mm                           |
| <b>Pads:</b>       | 73mm adjustable angle: EN288MW |
| <b>Option:</b>     | 70mm cartridge pads            |
| <b>Weight:</b>     | 186g                           |
| <b>Finish:</b>     | Black / Red / Blue / Gold      |
| <b>Packing:</b>    | 100pcs / ctn / 1.34cuft        |
| <b>Produced:</b>   | Taiwan                         |

**MV-85**
**CYCLO CROSS  
MINI V-BRAKE**

Dual linear spring tension adjuster

|                     |                                 |
|---------------------|---------------------------------|
| <b>Material:</b>    | Forged aluminum alloy arms      |
| <b>Arm length:</b>  | 85mm                            |
| <b>Pads:</b>        | 70mm adjustable angle: 271MW    |
| <b>Option:</b>      | 70mm cartridge pads             |
| <b>Weight:</b>      | 156g                            |
| <b>Finish:</b>      | Black / Silver / Anodized color |
| <b>Packing:</b>     | 100pcs / ctn / 1.16cuft         |
| <b>Produced in:</b> | Taiwan                          |

**MV-87**
**CYCLO CROSS  
MINI V-BRAKE**

Dual linear spring tension adjuster

|                     |                                      |
|---------------------|--------------------------------------|
| <b>Material:</b>    | Aluminum alloy arms                  |
| <b>Arm length:</b>  | 85mm                                 |
| <b>Pads:</b>        | 70mm adjustable angle: 271MW         |
| <b>Weight:</b>      | 155g                                 |
| <b>Finish:</b>      | Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 1.16cuft              |
| <b>Produced in:</b> | China                                |

**PC-390**

Power Modulator  
Finish: Head:  
Black / Silver / Satin

**PC-281**

Power Modulator  
Finish: Head:  
Black / Silver / Satin

**SS-79A**

Infinite and easy  
adjustable  
Stainless

**SS-48A**

Infinite and easy  
adjustable  
Stainless







### RC-480

Dual pivot caliper brake with quick release  
Light quick release mechanism  
Hi-performance cartridge pads: CT-321

**Material:** Forged aluminum alloy arms  
**Stroke:** 55-73 mm  
**Weight:** F: 180g / R: 177g  
**Finish:** High polished anodized Black / Silver  
**Packing:** 50pcs / ctn / 1.16cuft  
**Produced in:** Taiwan



### RC-483

New mechanical ratio  
Dual pivot caliper brake  
Light quick release mechanism

**Material:** Aluminum alloy arms  
**Stroke:** 55-73mm  
**Weight:** F: 203g / R: 199g  
**Finish:** Black / Silver  
**Packing:** 100pcs / ctn / 1.16cuft  
**Produced in:** China



### RC-477

New mechanical ratio  
Dual pivot caliper brake with quick release  
Light quick release mechanism  
Hi-performance cartridge pads: CT-321

**Material:** Forged aluminum alloy arms  
**Stroke:** 47-60 mm  
**Weight:** F: 155g / R: 152g  
**Finish:** High polished anodized Black / Silver  
**Packing:** 100pcs / ctn / 1.69cuft  
**Produced in:** Taiwan




### RC-482

New mechanical ratio  
Dual pivot caliper brake  
Light quick release mechanism  
Hi-performance cartridge pads: CT-321

**Material:** Aluminum alloy arms  
**Stroke:** 47-60mm  
**Weight:** F: 163g / R: 160g  
**Finish:** Black / Silver  
**Packing:** 100pcs / ctn / 1.16cuft  
**Produced in:** China

**RC-472****New SHIMANO mechanical ratio**

Dual pivot caliper brake with quick release  
 Quick adjust function when rim small deformation  
 Ball bearing  
 Adjustable spring tension design  
 Hi-performance cartridge pads: CT-360

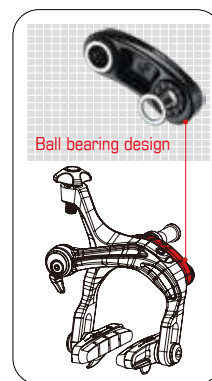

**Material:** Forged aluminum alloy arms  
**Stroke:** 39-52 mm  
**Weight:** F: 135g / R: 132g  
**Finish:** High polished anodized Black / Silver  
**Packing:** 100pcs / ctn / F: 1.69cuft / R: 1.34cuft  
**Produced in:** Taiwan

**RC-476****New SHIMANO mechanical ratio**

Dual pivot caliper brake with quick release  
 Light quick release mechanism  
 Hi-performance cartridge pads: CT-360

**Material:** Forged aluminum alloy arms  
**Stroke:** 39-52mm  
**Weight:** F: 146g / R: 143g  
**Finish:** High polished anodized Black / Silver  
**Packing:** 100pcs / ctn / 1.34cuft  
**Produced in:** Taiwan

**RC-481****New SHIMANO mechanical ratio**

Dual pivot caliper brake  
 Light quick release mechanism  
 Hi-performance cartridge pads: CT-321

**Material:** Aluminum alloy arms  
**Stroke:** 39-52mm  
**Weight:** F: 152g / R: 149g  
**Finish:** Black / Silver  
**Packing:** 100pcs / ctn / 1.34cuft  
**Produced in:** China

**RC-452**

Dual pivot caliper brake  
 Light quick release mechanism  
 Hi-performance cartridge pads: CT-321

**Material:** Forged aluminum alloy arms  
**Stroke:** 39-49mm  
**Weight:** F: 164g / R: 161g  
**Finish:** Anodized Black / Silver  
**Packing:** 100pcs / ctn / F: 1.34cuft  
**Produced in:** China

**CB-106****CANTI brake**

**Material:** Aluminum alloy arms  
**Arm length:** 55mm  
**Weight:** 170g  
**Finish:** Black / Silver / Powder coated color  
**Produced in:** China



### RC-453

Caliper brake central bolt  
Light quick release mechanism

**Material:** Aluminum alloy arms  
**Stroke:** 48-64mm  
**Weight:** F: 178g / R: 174g  
**Finish:** Black / Silver  
**Packing:** 100pcs / ctn / 1.34cuft  
**Produced in :** China



### JC-301

Side-pull with strength structure brake arch

**Material:** Aluminum alloy arms  
**Stroke:** 73-92mm  
**Weight:** 214g  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 100pcs / ctn / 1.69cuft  
**Produced in:** China



### Y810AD

**DUAL PIVOTS**

Dual pivot caliper brake

**Material:** Aluminum alloy arms  
**Stroke:** 55-75mm  
**Weight:** F: 193g / R: 143g  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 100pcs / ctn / 1.57cuft  
**Produced in:** China



### U-961

Low profile design  
Dual coiled spring tension adjuster

**Material:** Aluminum alloy arms  
**Weight:** 175g  
**Finish:** Black / Silver Powder coated color  
**Packing:** 100pcs / ctn / 1.56cuft  
**Produced:** China



### U-980R (REAR ONLY)

### U-981F (FRONT ONLY)

Casing stopper at left side from rider

### U-982F (FRONT ONLY)

Casing stopper at right side from rider

### U-983R (REAR ONLY)

Casing stopper at dual side  
Dual coiled spring tension adjuster

**Material:** Aluminum alloy arms  
**Weight:** U-980R: 217g  
U-981F: 211g  
U-982F: 212g  
U-983R: 206g  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 100pcs / ctn / 1.69cuft  
**Produced in:** China


**159A**

Internal cable routing design

Ergonomic lever specifically designed for left and right hand comfort

Expandable plug clamp design

**Material:** Forged aluminum  
**Aero bar I.D.:** Ø19.8 / Ø20.8mm  
**Weight:** 80.6g  
**Finish:** Anodized / S.B. color  
**Packing:** 100pcs / ctn / 0.53cuft  
**Produced in:** Taiwan

**BL-253**

Light weight design


Aero lever

Forming aluminum lever

Ergonomic lever design

Quick release mechanism

**Material:** Aluminum alloy lever  
**Clamp I.D.:** Ø23.8~Ø24.2  
**Weight:** 129.4g  
**Finish:** Silver lever / Black rubber hood  
**Packing:** 100pcs / ctn / 1.34cuft  
**Produced in:** Taiwan

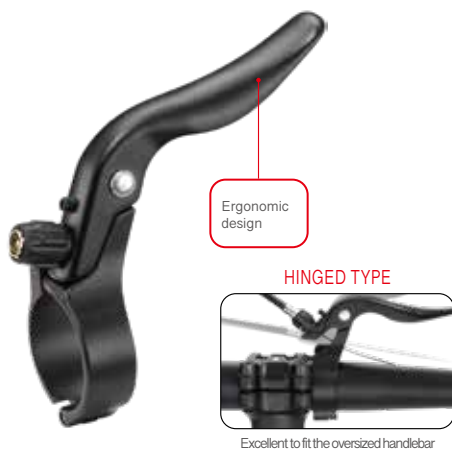**160A (TOP MOUNT LEVER)****HINGED TYPE**

Hinged type clamp design

Narrow clamp allows clamping close to stem on oversized handlebars

With reach adjuster, cable adjuster barrel &amp; return spring

Ergonomic lever specifically designed for left and right hand comfort

For use with caliper or canti brakes

**Material:** Forged aluminum alloy  
**Design for** Ø31.8 mm O.D. handlebar.  
**Weight:** 46.5g  
**Finish:** Anodized / S.B. color  
**Packing:** 100pcs / ctn / 0.53cuft  
**Produced in:** Taiwan

**175A****HINGED TYPE**

With reach adjuster

**Material:** AL6061-T6  
**Clamp I.D.:** Ø31.8mm  
**Weight:** 59.8g  
**Finish:** Anodized / S.B. Color  
**Packing:** 100pcs / ctn / 0.53cuft  
**Produced in:** China





## 249A HINGED TYPE

With reach adjuster

|              |                                                 |
|--------------|-------------------------------------------------|
| Material:    | Aluminum alloy bracket w/ Forged aluminum lever |
| Clamp ID:    | Ø22.2 / Ø23.8mm                                 |
| Weight:      | 53g: Ø22.2 / 58g: Ø23.8                         |
| Finish:      | Anodized / S.B. / Powder coated color           |
| Packing:     | 100pcs / ctn / 0.87cuft                         |
| Produced in: | China                                           |



XL-342



## XL-342 (2-FINGER)

## XL-341 (1-FINGER)



The unique patented design to integrate and to reduce the parts from the lock-on grip, giving it a more simplified yet elegant look. This mechanism also provides a stronger force to lock the grip much better.

"Knee saver"

features a recessive bolt system to grant a more elegant look than the traditional levers while at the same time protecting its users' knee cap from the protruding bolt.

"V" point clamping system

allows its users to tighten the levers with less force, granting them that much more energy for the joyful ride later.

Pin pivot for the light, smooth action & non-endplay



XL-341

|              |                                                    |
|--------------|----------------------------------------------------|
| Material:    | Forged aluminum alloy lever                        |
| Weight:      | XL-342: 69g<br>XL-341: 68.3g                       |
| Finish:      | Bracket: Black<br>Lever: Black / Red / Blue / Gold |
| Packing:     | 100pcs / ctn / 0.87cuft                            |
| Produced in: | Taiwan                                             |

## XL-91/XL-91G (2-FINGER)

Otherwise known as the "knee saver", XL-91 by Promax features a recessive bolt system to grant a more elegant look than the traditional levers while at the same time protecting its users' knee cap from the protruding bolt. The efficient "V" point clamping system allows its users to tighten the levers with less force, granting them that much more energy for the joyful ride later!

Note: Not to be used on carbon handlebars



XL-91G

Excellent modulation lever designed for DSK-715 Disc Brake and Avid Brakes  
Pin pivot for the light, smooth action & non-endplay  
Ambidextrous lever for both right and left hand sides

XL-91: Thumb shifter compatible only  
XL-91G: Twist shifter compatible only

|              |                             |
|--------------|-----------------------------|
| Material:    | Forged aluminum alloy lever |
| Weight:      | 85g                         |
| Finish:      | Black                       |
| Packing:     | 100pcs / ctn / 0.87cuft     |
| Produced in: | China                       |

**XL-102 (4-FINGER)**

Two Locking-block bracket design  
Pin pivot for the light, smooth action & non-endplay  
Ambidextrous lever for both right and left hand sides

Thumb shifter compatible only

**Material:** Forged aluminum alloy lever  
**Weight:** 91g  
**Finish:** Black  
**Packing:** 100pcs / ctn / 0.87cuft  
**Produced in:** Taiwan

**XL-90D (4-FINGER)**

Linear pulled or Regular Canti brakes version available  
Pin pivot for the light, smooth action & non-endplay  
Optional: Ambidextrous lever for both right and left hand sides

**Material:** Aluminum alloy lever  
**Weight:** 90.4g  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 100pcs / ctn / 1.16cuft  
**Produced in:** China



XL-96

**XL-96/XL-96G (3.5-FINGER)**

Linear pulled or Regular Canti brakes version available  
Pin pivot for the light, smooth action & non-endplay

XL-96: Thumb shifter compatible only  
XL-96G: Twist shifter compatible only

**Material:** Aluminum alloy  
**Weight:** XL-96: 100g / XL-96G: 102g  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 100pcs / ctn / 0.87cuft  
**Produced in:** China



XL-57

**XL-57/BL-57 (4-FINGER)**

Kraton rubber grip design easy on fingers  
Linear pulled or Regular Canti brakes version available  
Pin pivot for the light, smooth action & non-endplay  
Thumb shifter compatible only

**Material:** Aluminum alloy w/ Kraton  
**Option:** BL-57: Bolt-type  
**Weight:** XL-57: 106g  
BL-57: 107g  
**Finish:** Black / Silver / Powder coated color  
Kraton: Pearl gray / Blue  
**Packing:** 100pcs / ctn / 0.87cuft  
**Produced in:** China



FS-349



FS-349G



XL-378



XL-373



### FS-349 (LH) (3-FINGER)

### FS-349G (RH) (3-FINGER)

Tool-free brake lever reach adjustment

Brake lever reach independent from brake pad clearance setting

Shorter reach ideal for kids

FS-349 (LH): Thumb shifter compatible only

FS-349G (RH): Twist shifter compatible only

**Material:** Aluminum alloy body / Steel lever

**Weight:** FS-349 (LH): 108.36g

FS-349G (RH): 114.12g

**Finish:** Black

**Packing:** 100pcs / ctn / 0.78cuft

**Produced in:** Taiwan

### FS-378/XL-378 (2-FINGER)

FS-378: For U brake or Caliper brake

XL-378: For linear pulled brake

**Material:** Aluminum alloy

**Weight:** 78g

**Finish:** Black / Silver / Powder coated color

**Packing:** 100pcs / ctn / 0.87cuft

**Produced in:** China

### FS-373/XL-373 (2-FINGER)

Otherwise known as the "knee saver", FS373 / XL373 by Promax features a recessive bolt system to grant a more elegant look than the traditional levers while at the same time protecting its users knee cap from the protruding bolt. The efficient "V" point clamping system allows its users to tighten the levers with less force granting them that much more energy for the joyful ride later!

Note : Not to be used on carbon handlebars

Ambidextrous lever for both right and left hand sides

FS-373: Two locking-block bracket design

For U brake or Caliper brake

XL-373: For linear pulled brake

Pin pivot for the light smooth action & non-endplay

**Material:** Aluminum alloy

**Weight:** 74.4g

**Finish:** Black

**Packing:** 100pcs / ctn / 0.87cuft

**Produced in:** China

### FS-428A (2-FINGER)

**HINGED TYPE**

Hinged type clamp BMX lever

U brake or Caliper brake

**Material:** Aluminum alloy

**Weight:** 89g

**Finish:** Black / Silver / Powder coated color

**Packing:** 100pcs / ctn / 0.87cuft

**Produced in:** China



BL-42

**BL-42/BL-42G (2-FINGER)**

Linear pulled or Regular Canti brakes version available

|         |                               |
|---------|-------------------------------|
| BL-42:  | Thumb shifter compatible only |
| BL-42G: | Twist shifter compatible only |

|                     |                                      |
|---------------------|--------------------------------------|
| <b>Material:</b>    | Aluminum alloy                       |
| <b>Weight:</b>      | BL-42: 94g<br>BL-42G: 94g            |
| <b>Finish:</b>      | Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 0.87cuft              |
| <b>Produced in:</b> | China                                |



BL-82

**BL-82/BL-82G (3-FINGER)**

Linear pulled or Regular Canti brakes version available

|         |                               |
|---------|-------------------------------|
| BL-82:  | Thumb shifter compatible only |
| BL-82G: | Twist shifter compatible only |

|                     |                                      |
|---------------------|--------------------------------------|
| <b>Material:</b>    | Aluminum alloy                       |
| <b>Weight:</b>      | BL-82: 97g<br>BL-82G: 99g            |
| <b>Finish:</b>      | Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 0.87cuft              |
| <b>Produced in:</b> | China                                |



BL-46

BL-46AP

**BL-46/BL-46G/BL-46AP (3-FINGER)**

Linear pulled or Regular Canti brakes version available

|          |                                                                        |
|----------|------------------------------------------------------------------------|
| BL-46:   | Thumb shifter compatible only                                          |
| BL-46G:  | Twist shifter compatible only                                          |
| BL-46AP: | Thumb shifter compatible only<br>Resin bracket w/ Aluminum alloy lever |

|                     |                                               |
|---------------------|-----------------------------------------------|
| <b>Material:</b>    | Aluminum alloy                                |
| <b>Weight:</b>      | BL-46: 104g<br>BL-46G: 105g<br>BL-46AP: 95.8g |
| <b>Finish:</b>      | Black / Silver / Powder coated color          |
| <b>Packing:</b>     | 100pcs / ctn / 0.87cuft                       |
| <b>Produced in:</b> | China                                         |



BL-367

BL-367G

BL-367AP

**BL-367/BL-367G/BL-367AP**

Suitable for children's bikes

Linear pulled or Regular Canti brakes version available  
For linear pulled or Regular Canti brakes

|           |                                                                        |
|-----------|------------------------------------------------------------------------|
| BL-367:   | Thumb shifter compatible only                                          |
| BL-367G:  | Twist shifter compatible only                                          |
| BL-367AP: | Thumb shifter compatible only<br>Resin bracket w/ Aluminum alloy lever |

|                     |                                                               |
|---------------------|---------------------------------------------------------------|
| <b>Material:</b>    | Aluminum alloy                                                |
| <b>Weight:</b>      | BL-367: 84g<br>BL-367G: 93g<br>BL-367AP: 87g                  |
| <b>Finish:</b>      | Bracket: Black<br>Lever: Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 0.87cuft                                       |
| <b>Produced in:</b> | China                                                         |



BL-365

BL-365AP

### BL-365/BL-365AP

Suitable for children's bikes  
For Regular Canti brakes only

|           |                                                                        |
|-----------|------------------------------------------------------------------------|
| BL-365:   | Thumb shifter compatible only                                          |
| BL-365AP: | Thumb shifter compatible only<br>Resin bracket w/ Aluminum alloy lever |

|                     |                                                               |
|---------------------|---------------------------------------------------------------|
| <b>Material:</b>    | Aluminum alloy                                                |
| <b>Weight:</b>      | BL-365: 86g<br>BL-365AP: 88g                                  |
| <b>Finish:</b>      | Bracket: Black<br>Lever: Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 0.87cuft                                       |
| <b>Produced in:</b> | China                                                         |



BL-81

BG-81AP

### BL-81AP/BG-81AP/BL-81/BL-81G (2-FINGER)

Linear pulled or Regular Canti brakes version available  
For Linear pulled or Regular Canti brakes

|          |                               |
|----------|-------------------------------|
| BL-81AP: | Thumb shifter compatible only |
| BG-81AP: | Twist shifter compatible only |
| BL-81:   | Thumb shifter compatible only |
| BL-81G:  | Twist shifter compatible only |

|                     |                                                               |
|---------------------|---------------------------------------------------------------|
| <b>Material:</b>    | Resin bracket w/ Aluminum alloy lever                         |
| <b>Weight:</b>      | BL-81AP: 93g / BG-81AP: 86g<br>BL-81: 97g / BL-81G: 112g      |
| <b>Finish:</b>      | Bracket: Black<br>Lever: Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 0.87cuft                                       |
| <b>Produced in:</b> | China                                                         |



### BL-30AP (2-FINGER)

For Linear pulled or Regular Canti brakes For Twist shifter

|                     |                                                               |
|---------------------|---------------------------------------------------------------|
| <b>Material:</b>    | Resin bracket w/ Aluminum alloy lever                         |
| <b>Weight:</b>      | 95g                                                           |
| <b>Finish:</b>      | Bracket: Black<br>Lever: Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 0.87cuft                                       |
| <b>Produced in:</b> | China                                                         |



BL-39

BL-39AP

### BL-39/BL-39G/BL-39AP (4-FINGER)

Linear pulled or Regular Canti brakes version available

|          |                                                                        |
|----------|------------------------------------------------------------------------|
| BL-39:   | Thumb shifter compatible only                                          |
| BL-39G:  | Twist shifter compatible only                                          |
| BL-39AP: | Thumb shifter compatible only<br>Resin bracket w/ Aluminum alloy lever |

|                     |                                             |
|---------------------|---------------------------------------------|
| <b>Material:</b>    | Aluminum alloy                              |
| <b>Weight:</b>      | BL-39: 101g<br>BL-39G: 101g<br>BL-39AP: 96g |
| <b>Finish:</b>      | Black / Silver / Powder coated color        |
| <b>Packing:</b>     | 100pcs / ctn / 0.87cuft                     |
| <b>Produced in:</b> | China                                       |



**LM-48 (4-FINGER)**

For linear pulled brakes only

|                     |                                      |
|---------------------|--------------------------------------|
| <b>Material:</b>    | Aluminum alloy                       |
| <b>Weight:</b>      | 94g                                  |
| <b>Finish:</b>      | Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 0.87cuft              |
| <b>Produced in:</b> | China                                |

**BL-47 (4-FINGER)**

Dual cable pulled lever, stop both wheels with one hand  
 Kraton rubber grip design easy for finger  
 Split clamp design

|                     |                                      |
|---------------------|--------------------------------------|
| <b>Material:</b>    | Aluminum alloy w/ Kraton             |
| <b>Weight:</b>      | 94g                                  |
| <b>Finish:</b>      | Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 1.16cuft              |
| <b>Produced in:</b> | Taiwan                               |

**E-BIKE****LE-55AG (4-FINGER)**

Sensor-type E-bike brake lever  
 For use with linear pull brake and twist shifter

|                     |                                      |
|---------------------|--------------------------------------|
| <b>Material:</b>    | Aluminum alloy                       |
| <b>Weight:</b>      | 115g                                 |
| <b>Finish:</b>      | Black / Silver / Powder coated color |
| <b>Packing:</b>     | 100pcs / ctn / 0.87cuft              |
| <b>Produced in:</b> | China                                |

**LE-57AG**

|                         |                                 |
|-------------------------|---------------------------------|
| <b>Material:</b>        | Aluminum alloy                  |
| <b>Electrical wire:</b> | machine or electron             |
| <b>Finish:</b>          | Bracket: Black<br>Lever: Silver |
| <b>Packing:</b>         | 100pcs / ctn / 0.87cuft         |
| <b>Produced in:</b>     | China                           |



DR-835R

DR-835F

## DR-835F/DR-835R

|                    |                                                                     |
|--------------------|---------------------------------------------------------------------|
| Spoke holes:       | 14G x 24H                                                           |
| Axle material:     | AL7075                                                              |
| Front:             | HH12 x 100mm (OPT: HH15 QR Adapter)                                 |
| Rear:              | HH12 x 142mm (OPT: TA135 QR Adapter)                                |
| Hub Shell:         | AL2014                                                              |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)                                     |
| Cassette body:     | AL7075 (Shimano & XDR optional)<br>(3 / 5 / 6 Pawls) (Star Ratchet) |
| Dust cap:          | Alloy                                                               |
| Weight:            | F: 115g / R: 220g (Shimano type) ; 215g (XDR type)                  |
| Finish:            | Black / Silver / Anodized / S.B.color                               |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft                             |
| Produced in:       | Taiwan                                                              |



DR-815R

DR-815F

## DR-815F/DR-815R/DR-815E

|                    |                                                    |
|--------------------|----------------------------------------------------|
| Spoke holes:       | 14G x 24H                                          |
| Axle material:     | AL7075                                             |
| Front:             | HH15 x 100mm (OPT: HH12 QR Adapter)                |
| Rear:              | HH12 x 142mm (OPT: TA135 QR Adapter)               |
| Hub Shell:         | AL6082                                             |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)                    |
| Cassette body:     | AL7075 (Shimano type & XDR type optional)          |
| Dust cap:          | Alloy                                              |
| Weight:            | F: 137g / R: 242g (Shimano type) ; 233g (XDR type) |
| Finish:            | Black / Silver / Anodized / S.B.color              |
| Produced in:       | Taiwan                                             |



DR-862F

DR-862R

## DR-862F/DR-862R

|                    |                                                                                        |
|--------------------|----------------------------------------------------------------------------------------|
| Spoke holes:       | 14G x 18H                                                                              |
| Axle material:     | AL7075-T6                                                                              |
| Front:             | HH12 x 100mm (OPT: HH12 QR Adapter)                                                    |
| Rear:              | HH12 x 142mm (OPT: TA135 QR Adapter)                                                   |
| Hub Shell:         | AL7075                                                                                 |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)                                                        |
| Cassette body:     | AL7075 (Shimano & Sram & Campagnolo type optional)<br>(3 / 5 / 6 Pawls) (Star Ratchet) |
| Dust cap:          | Alloy                                                                                  |
| Weight:            | F: 148g / R: 252g                                                                      |
| Finish:            | Black / Silver / Anodized / S.B.color                                                  |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft                                                |
| Produced in:       | Taiwan                                                                                 |



DR-867F

DR-867R

## DR-867F/DR-867R

|                    |                                                                                        |
|--------------------|----------------------------------------------------------------------------------------|
| Spoke holes:       | F: 14G x 21H<br>R: 14G x 24H                                                           |
| Axle material:     | AL7075-T6                                                                              |
| Front:             | HH12 x 100mm                                                                           |
| Rear:              | HH12 x 142mm                                                                           |
| Hub Shell:         | AL6082                                                                                 |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)                                                        |
| Cassette body:     | AL7075 (Shimano & Sram & Campagnolo type optional)<br>(3 / 5 / 6 Pawls) (Star Ratchet) |
| Dust cap:          | Alloy                                                                                  |
| Weight:            | F: 122g / R: 242g                                                                      |
| Finish:            | Black / Silver / Anodized / S.B.color                                                  |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft                                                |
| Produced in:       | Taiwan                                                                                 |



## DR-825F/DR-825R

|                           |                                                                                    |
|---------------------------|------------------------------------------------------------------------------------|
| <b>Spoke holes:</b>       | F: 14G x 21H<br>R: 14G x 24H                                                       |
| <b>Axle material:</b>     | AL7075                                                                             |
| <b>Front:</b>             | HH15 x 100mm (OPT: HH12, QR Adapter)                                               |
| <b>Rear:</b>              | HH12 x 142mm (OPT: TA135, QR Adapter)                                              |
| <b>Hub Shell:</b>         | AL7075                                                                             |
| <b>Rolling mechanism:</b> | Ball bearing (Rear: 4 Bearings)                                                    |
| <b>Cassette body:</b>     | AL7075 (Shimano & Micro Spline & XDR optional)<br>(3 / 5 / 6 Pawls) (Star Ratchet) |
| <b>Dust cap:</b>          | Alloy                                                                              |
| <b>Weight:</b>            | F: 140g / R: 265g (Shimano type) ; 262g (XDR type)                                 |
| <b>Finish:</b>            | Black / Silver / Anodized / S.B.color                                              |
| <b>Packing:</b>           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft                                            |
| <b>Produced in:</b>       | Taiwan                                                                             |



## DR-849R

Super boost

|                           |                                                                                   |
|---------------------------|-----------------------------------------------------------------------------------|
| <b>Spoke holes:</b>       | 14G x 28H                                                                         |
| <b>Axle material:</b>     | Steel                                                                             |
| <b>Rear:</b>              | HH12 x 157mm                                                                      |
| <b>Hub shell:</b>         | AL6082                                                                            |
| <b>Rolling mechanism:</b> | Ball bearing (Rear: 4 Bearings)                                                   |
| <b>Cassette body:</b>     | Steel (Shimano & Micro Spline & XDR optional)<br>(3 / 5 / 6 Pawls) (Star Ratchet) |
| <b>Dust cap:</b>          | Alloy                                                                             |
| <b>Weight:</b>            | 403g (Micro Spline) / 386g (Shimano type) / 381g (XDR type)                       |
| <b>Finish:</b>            | Black / Silver / Anodized / S.B.color                                             |
| <b>Packing:</b>           | 50pcs / ctn / R: 1.61cuft                                                         |
| <b>Produced in:</b>       | Taiwan                                                                            |



## DR-858EBF/DR-858EBR (FOR E-BIKE)

|                           |                                                                          |
|---------------------------|--------------------------------------------------------------------------|
| <b>Spoke holes:</b>       | 14G x 28H                                                                |
| <b>Axle material:</b>     | AL7075                                                                   |
| <b>Front:</b>             | HH15 x 110mm (OPT: HH12 QR Adapter)                                      |
| <b>Rear:</b>              | HH12 x 148mm                                                             |
| <b>Hub shell:</b>         | AL6082                                                                   |
| <b>Rolling mechanism:</b> | Ball bearing (Rear: 4 Bearings)                                          |
| <b>Cassette body:</b>     | Steel (Shimano & Sram type optional)<br>(3 / 5 / 6 Pawls) (Star Ratchet) |
| <b>Dust cap:</b>          | Alloy                                                                    |
| <b>Weight:</b>            | F: 144g / R: 339g                                                        |
| <b>Finish:</b>            | Black / Silver / Anodized / S.B.color                                    |
| <b>Packing:</b>           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft                                  |
| <b>Produced in:</b>       | Taiwan                                                                   |



## DR-823EBF/DR-823EBR (FOR E-BIKE)

|                           |                                                    |
|---------------------------|----------------------------------------------------|
| <b>Spoke holes:</b>       | 14G x 28H                                          |
| <b>Axle material:</b>     | F: AL7075 / R: SCM415                              |
| <b>Front:</b>             | HH15 x 110mm (OPT: HH12 QR Adapter)                |
| <b>Rear:</b>              | HH12 x 148mm                                       |
| <b>Hub shell:</b>         | AL6082                                             |
| <b>Rolling mechanism:</b> | Ball bearing (Rear: 4 Bearings)                    |
| <b>Cassette body:</b>     | AL7075 (Shimano type & XDR type optional)          |
| <b>Dust cap:</b>          | Alloy                                              |
| <b>Weight:</b>            | F: 160g / R: 302g (Shimano type) ; 297g (XDR type) |
| <b>Finish:</b>            | Black / Silver / Anodized / S.B.color              |
| <b>Packing:</b>           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft            |
| <b>Produced in:</b>       | Taiwan                                             |



DR-836R-6S

DR-836F-6S



RB-855R

RB-855F



DR-962R-CL

DR-962F-CL



DR-961R-CL

DR-961F-CL

## DR-836F-CL/DR-836R-CL DR-836F-6S/DR-836R-6S

### Boost

|                    |                                                                                    |
|--------------------|------------------------------------------------------------------------------------|
| Spoke holes:       | 14G x 28H / 32H                                                                    |
| Axle material:     | AL7075                                                                             |
| Front:             | HH-15 x 110mm                                                                      |
| Rear:              | HH12 x 148mm                                                                       |
| Hub Shell:         | AL6082                                                                             |
| Rolling mechanism: | Ball bearing (Rear 4 Bearings)                                                     |
| Cassette body:     | AL7075 (Shimano & Micro Spline & XDR optional)<br>(3 / 5 / 6 Pawls) (Star Ratchet) |
| Dust cap:          | Alloy                                                                              |
| Weight:            | F: 135g / R: 248g (Shimano type) ; 245g ( XDR type)                                |
| Finish:            | Black / Anodized / S.B color                                                       |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft                                            |
| Produced in:       | Taiwan                                                                             |

## RB-855F/RB-855R

|                    |                                             |
|--------------------|---------------------------------------------|
| Spoke holes:       | F: 14G x 16H / 21H<br>R: 14G x 20H / 24H    |
| Axle Material:     | AL7075                                      |
| Front:             | QR x 100mm                                  |
| Rear:              | QR x 130mm                                  |
| Hub Shell:         | AL6082                                      |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)             |
| Cassette body:     | AL7075 (Shimano type & Campy type optional) |
| Dust cap:          | Alloy                                       |
| Weight:            | F: 80g / R: 211g (Shimano type)             |
| Finish:            | Black / Silver / Anodized / S.B.color       |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft     |
| Produced in:       | Taiwan                                      |

## DR-962F-CL/DR-962R-CL

### Boost

|                    |                                                                              |
|--------------------|------------------------------------------------------------------------------|
| Spoke holes:       | 14G x 28H / 32H / 36H                                                        |
| Axle material:     | AL7075                                                                       |
| Front:             | HH15 x 110mm (OPT: HH12 Adapter)                                             |
| Rear:              | HH12 x 148mm                                                                 |
| Hub shell:         | AL6061                                                                       |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)                                              |
| Cassette body:     | AL7075 / SCM415, 3 pawls (Shimano type,<br>Micro Spline & XDR type optional) |
| Dust cap:          | Alloy                                                                        |
| Weight:            | F: 188.5g / R: 356.9g (SRS)                                                  |
| Finish:            | Black / Anodized / S.B.color                                                 |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft                                      |
| Produced in:       | Taiwan                                                                       |

## DR-961F-CL/DR-961R-CL

|                    |                                                                               |
|--------------------|-------------------------------------------------------------------------------|
| Spoke holes:       | 14G x 28H / 32H / 36H                                                         |
| Axle material:     | AL7075                                                                        |
| Front:             | HH15 x 100mm (OPT: QR / HH12 Adapter)                                         |
| Rear:              | HH12 x 142mm (OPT: QR Adapter for Shimano 11 speeds)                          |
| Hub shell:         | AL6061                                                                        |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)                                               |
| Cassette body:     | AL7075 / SCM415, 3 pawls (Shimano type ,<br>Micro Spline & XDR type optional) |
| Dust cap:          | Alloy                                                                         |
| Weight:            | F: 180.3g / R: 351.8g (SRS)                                                   |
| Finish:            | Black / Anodized / S.B.color                                                  |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft                                       |
| Produced in:       | Taiwan                                                                        |



DR-850R

DR-850F

## DR-850F/DR-850R

Boost

|                    |                                                                  |
|--------------------|------------------------------------------------------------------|
| Spoke holes:       | 14G x 24H / 28H / 32H / 36H                                      |
| Axle material:     | AL7075                                                           |
| Front:             | HH15 x 110mm                                                     |
| Rear:              | HH12 x 148mm                                                     |
| Hub Shell:         | AL6061                                                           |
| Rolling mechanism: | Ball bearing (Rear:4bearings)                                    |
| Cassette body:     | AL7075 (Shimano & Micro Spline & XDR type optional)<br>(6 Pawls) |
| Dust cap:          | Alloy                                                            |
| Weight:            | F: 135g / R: 276g (Shimano type) ; 267g (XDR type)               |
| Finish:            | Black / Silver / Anodized / S.B.color                            |
| Packing:           | F: 50pcs / ctn / 1.35cuft ; R: 25pcs / ctn / 0.87cuft            |
| Produced in:       | China                                                            |



DR-851R

DR-851F

## DR-851F/DR-851R

|                    |                                                                  |
|--------------------|------------------------------------------------------------------|
| Spoke holes:       | 14G x 24H / 28H / 32H / 36H                                      |
| Axle material:     | AL7075                                                           |
| Front:             | HH15 x 100mm                                                     |
| Rear:              | HH12 x 142mm                                                     |
| Hub Shell:         | AL6061                                                           |
| Rolling mechanism: | Ball bearing (Rear: 4bearings)                                   |
| Cassette body:     | AL7075 (Shimano & Micro Spline & XDR type optional)<br>(6 Pawls) |
| Dust cap:          | Alloy                                                            |
| Weight:            | F: 130g / R: 273g (Shimano type) ; 264g (XDR type)               |
| Finish:            | Black / Silver / Anodized / S.B.color                            |
| Packing:           | F: 50pcs / ctn / 1.35cuft ; R: 25pcs / ctn / 0.87cuft            |
| Produced in:       | China                                                            |



DR-962R

DR-962F

## DR-962F/DR-962R

Boost

|                    |                                                    |
|--------------------|----------------------------------------------------|
| Spoke holes:       | 14G x 28H / 32H / 36H                              |
| Axle material:     | AL7075                                             |
| Front:             | HH-15 x 110mm (Thru Axle)                          |
| Rear:              | HH-12 x 148mm (Thru Axle)                          |
| Hub Shell:         | AL6061                                             |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)                    |
| Cassette body:     | AL7075 / Steel (Shimano type & XDR type optional)  |
| Dust cap:          | Alloy                                              |
| Weight:            | F: 197g / R: 288g (Shimano type) ; 276g (XDR type) |
| Finish:            | Black / Anodized / S.B color                       |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft            |
| Produced in:       | Taiwan                                             |



DR-961R

DR-961F

## DR-961F/DR-961R

|                    |                                                    |
|--------------------|----------------------------------------------------|
| Spoke holes:       | 14G x 28H / 32H / 36H                              |
| Axle material:     | AL7075                                             |
| Front:             | HH-15 x 100mm (OPT: QR Adapter)                    |
| Rear:              | HH-12 x 142mm (OPT: TA135 QR Adapter)              |
| Hub Shell:         | AL6061                                             |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)                    |
| Cassette body:     | AL7075 / Steel (Shimano type & XDR type optional)  |
| Dust cap:          | Alloy                                              |
| Weight:            | F: 189g / R: 291g (Shimano type) ; 283g (XDR type) |
| Finish:            | Black / Anodized / S.B color                       |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft            |
| Produced in:       | Taiwan                                             |





DR-839R-6S

DR-839F-6S



DR-842R-6S

DR-842F-6S




DR-843R

DR-843F



DB-602EF-CL

DB-602EF-6S

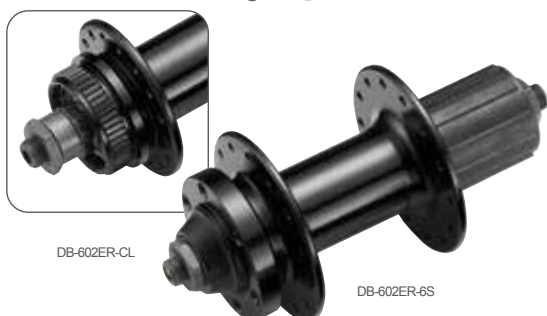

DB-602ER-CL

DB-602ER-6S

## DR-839F-CL / DR-839R-CL DR-839F-6S / DR-839R-6S

Boost

|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Spoke holes:       | 14G x 28H / 32H / 36H                                                    |
| Axle material:     | AL7075                                                                   |
| Front:             | HH15 x 110mm                                                             |
| Rear:              | HH12 x 148mm                                                             |
| Hub shell:         | AL6061                                                                   |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)                                          |
| Cassette body:     | AL7075 (Shimano & XDR type optional)<br>(3 / 5 / 6 Pawls) (Star Ratchet) |
| Dust cap:          | Alloy                                                                    |
| Weight:            | F: 170g / R: 270g                                                        |
| Finish:            | Black / Silver / Anodized / S.B.color                                    |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft                                  |
| Produced in:       | Taiwan                                                                   |

## DR-842F-CL / DR-842R-CL DR-842F-6S / DR-842R-6S

|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Spoke holes:       | 14G x 28H / 32H / 36H                                                    |
| Axle material:     | AL7075                                                                   |
| Front:             | HH15 x 100mm                                                             |
| Rear:              | HH12 x 142mm                                                             |
| Hub shell:         | AL6061                                                                   |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)                                          |
| Cassette body:     | AL7075 (Shimano & XDR type optional) (3 / 5 / 6 Pawls)<br>(Star Ratchet) |
| Dust cap:          | Alloy                                                                    |
| Weight:            | F: 160g / R: 270g                                                        |
| Finish:            | Black / Silver / Anodized / S.B.color                                    |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft                                  |
| Produced in:       | Taiwan                                                                   |

## DR-843F / DR-843R

|                    |                                         |
|--------------------|-----------------------------------------|
| Spoke holes:       | 14G x 28H / 32H / 36H                   |
| Axle material:     | AL7075                                  |
| Front:             | Ø9 x 100mm                              |
| Rear:              | Ø10 x 135mm                             |
| Hub shell:         | AL6061                                  |
| Rolling mechanism: | Ball bearing (Rear: 4 Bearings)         |
| Cassette body:     | AL7075 (3 / 5 / 6 Pawls) (Star Ratchet) |
| Weight:            | F: 180g / R: 330g                       |
| Finish:            | Black / Silver / Anodized / S.B.color   |
| Packing:           | 50pcs / ctn / F: 1.24cuft / R: 1.81cuft |
| Produced in:       | Taiwan                                  |

## DB-602EF-CL / DB-602ER-CL DB-602EF-6S / DB-602ER-6S

|                    |                                                                                                        |
|--------------------|--------------------------------------------------------------------------------------------------------|
| Spoke holes:       | 14G x 28H / 32H / 36H                                                                                  |
| Axle material:     | Hollow, S45C                                                                                           |
| Front:             | M9 x 100mm                                                                                             |
| Rear:              | M10 x 135mm                                                                                            |
| Hub Shell:         | AL6061                                                                                                 |
| Rolling mechanism: | Loose ball                                                                                             |
| Cassette body:     | Steel, 2-pawls                                                                                         |
| Weight:            | DR-602E-CL: F:215g / R: 410g<br>DR-602E-6S: F:281g / R: 467g                                           |
| Finish:            | Black / Silver / Anodized / S.B. color                                                                 |
| Packing:           | DB-602EF-CL / DB-602EF-6S: 50pcs / ctn / 1.53cuft<br>DB-602ER-CL / DB-602ER-6S: 50pcs / ctn / 1.94cuft |
| Produced in:       | China                                                                                                  |



### PB-209

|                    |                                       |
|--------------------|---------------------------------------|
| Spoke holes:       | 14G x 16H / 20H / 24H                 |
| Axle Material:     | Steel                                 |
| Hub Shell:         | AL6061                                |
| Rolling mechanism: | Loose ball                            |
| Weight:            | 172g                                  |
| Finish:            | Black / Silver / Anodized / S.B.color |
| Packing:           | 50pcs / ctn / 0.8cuft                 |
| Produced in:       | China                                 |



### QR-462/QR-463

This bicycle wheel is attached by a lever-actuated mechanism that allows you to install and remove the wheel without tools. To tighten up the system, turn the lever clockwise. Depending on the frame or fork construction it may be necessary to throw the lever several time. To open the system, pull-up and turn the lever counterclockwise. Ensure that the lever is back to its normal position after every adjusting (As figure).

|                |                                                    |
|----------------|----------------------------------------------------|
| Material:      | 7075T73 (Thru Axle)                                |
| For front hub: | 110mm                                              |
| For rear hub:  | 148mm                                              |
| Weight:        | QR-462: F: 62g / R: 70g<br>QR-463: F: 61g / R: 69g |
| Finish:        | Anodized Black                                     |
| Packing:       | 100pcs / ctn / 1.16cuft                            |
| Produced in:   | Taiwan                                             |



### QR-357/QR-357F/QR-357R

Forged aluminum alloy quick release lever

|                |                               |
|----------------|-------------------------------|
| Seat pin:      | 20 / 30 / 35mm                |
| For front hub: | 112mm                         |
| For rear hub:  | 149mm                         |
| Weight:        | 32g / 47.9g / 53.6g           |
| Finish:        | Anodized colors               |
| Packing:       | 250pcs / ctn / 0.66 / 1.3cuft |
| Produced in:   | Taiwan                        |



### QR-207/QR-207F/QR-207R

Forged aluminum alloy quick release lever

|                |                                       |
|----------------|---------------------------------------|
| Seat pin:      | 20 / 30 / 35mm                        |
| For front hub: | 109 / 112 / 114mm                     |
| For rear hub:  | 148 / 151mm                           |
| Weight:        | 32g / 44g / 47g                       |
| Finish:        | Black / Silver                        |
| Packing:       | 250pcs / ctn / 0.53 / 0.87 / 1.16cuft |
| Produced in:   | Taiwan                                |



### QR-354/QR-354F/QR-354R

Aluminum alloy quick release lever

|                |                               |
|----------------|-------------------------------|
| Seat pin:      | 20 / 30 / 35mm                |
| For front hub: | 86 / 112mm                    |
| For rear hub:  | 144mm                         |
| Weight:        | 34g / 48.9g / 53.8g           |
| Finish:        | Anodized colors               |
| Packing:       | 250pcs / ctn / 0.66 / 1.3cuft |
| Produced in:   | Taiwan                        |



### QR-318/QR-318F/QR-318R

Aluminum alloy quick release lever

|                |                                       |
|----------------|---------------------------------------|
| Seat pin:      | 25 / 27 / 30mm                        |
| For front hub: | 109 / 112 / 114mm                     |
| For rear hub:  | 148 / 151mm                           |
| Weight:        | 32g / 43g / 48g                       |
| Finish:        | Black / Silver                        |
| Packing:       | 250pcs / ctn / 0.66 / 0.87 / 1.16cuft |
| Produced in:   | Taiwan / China                        |



### QR-304/QR-304F/QR-304R

Aluminum alloy quick release lever

|                |                                       |
|----------------|---------------------------------------|
| Seat pin:      | 25 / 27 / 30mm                        |
| For front hub: | 109 / 112 / 114mm                     |
| For rear hub:  | 148 / 151mm                           |
| Weight:        | 34g / 43g / 48g                       |
| Finish:        | Black / Silver                        |
| Packing:       | 250pcs / ctn / 0.87 / 1.16 / 1.34cuft |
| Produced in:   | Taiwan / China                        |



SP-2059

Dropper Seat Post

Hydraulic Adjustable System with Wire Pulling System

Material:

AL6061 shaft + Forged alloy head / clamps

Offset:

0 mm

Rise:

±13°

Finish:

Black / Silver / Anodized / S.B. color

Packing:

50pcs / ctn / 1.3cuft

Produced in:

Taiwan

| SIZE / TRAVEL OPTIONS |            |            |            |           |
|-----------------------|------------|------------|------------|-----------|
| Diameter(mm)          | Travel(mm) | Length(mm) | Insert(mm) | Weight(g) |
| 27.2                  | 70         | 275        | 150        | 285       |
|                       | 100        | 345        | 187        | 340       |
| 30.9                  | 80         | 270        | 140.5      | 400       |
|                       | 100        | 310        | 160.5      | 430       |
|                       | 125        | 360        | 185.5      | 470       |
|                       | 150        | 410        | 210.5      | 505       |
|                       | 175        | 460        | 235.5      | 545       |
| 31.6                  | 80         | 270        | 140.5      | 415       |
|                       | 100        | 310        | 160.5      | 445       |
|                       | 125        | 360        | 185.5      | 490       |
|                       | 150        | 410        | 210.5      | 525       |
|                       | 175        | 460        | 235.5      | 570       |

SP-2062

Dropper Seat Post

Hydraulic Adjustable System with Wire Pulling System

Material:

AL6061 shaft + Forged alloy head / clamps

Offset:

0mm

Rise:

±13°

Finish:

Black / Silver / Anodized / S.B. color

Packing:

50pcs / ctn / 1.3cuft

Produced in:

Taiwan

| SIZE / TRAVEL OPTIONS |            |            |            |           |
|-----------------------|------------|------------|------------|-----------|
| Diameter(mm)          | Travel(mm) | Length(mm) | Insert(mm) | Weight(g) |
| 34.9                  | 80         | 265        | 131.5      | 475       |
|                       | 100        | 305        | 151.5      | 515       |
|                       | 125        | 355        | 176.5      | 570       |
|                       | 150        | 405        | 201.5      | 615       |
|                       | 175        | 455        | 230.5      | 675       |



SP-2063

Suspension+Dropper Seat Post

Hydraulic Adjustable System with Wire Pulling System

Material:

AL6061 shaft + Forged alloy head / clamps

Offset:

0mm

Rise:

±13°

Finish:

Black / Silver / Anodized / S.B. color

Packing:

50pcs / ctn / 1.3cuft

Produced in:

Taiwan

| SIZE / TRAVEL OPTIONS |            |            |            |           |
|-----------------------|------------|------------|------------|-----------|
| Diameter(mm)          | Travel(mm) | Length(mm) | Insert(mm) | Weight(g) |
| 34.9                  | 100        | 305        | 151.5      | 535       |
|                       | 125        | 355        | 176.5      | 580       |
|                       | 150        | 405        | 201.5      | 635       |
|                       | 175        | 455        | 230.5      | 695       |

BRAKE SYSTEM

HUB

SKEWER

SEAT POST

SEAT CLAMP

STEM

HANDLEBAR

PARTS & ACCESSORIES



## SP-2026

Dropper Seat Post

Hydraulic Adjustable System with Manual System

**Material:** AL6061 shaft + Alloy head  
**Offset:** 25mm  
**Rise:** -10°~+18°  
**Finish:** Black / Silver / Anodized / S.B. Color  
**Packing:** 50pcs / ctn / 1.3cuft  
**Produced in:** Taiwan

### SIZE / TRAVEL OPTIONS

| Diameter(mm) | Travel(mm) | Length(mm) | Insert(mm) | Weight(g) |
|--------------|------------|------------|------------|-----------|
| 27.2         | 70         | 300        | 130        | 493       |
|              | 100        | 370        | 160        | 555       |
| 30.9         | 100        | 360        | 163        | 558       |
|              | 125        | 420        | 189        | 594       |
|              | 150        | 480        | 236        | 630       |
| 31.6         | 100        | 360        | 163        | 579       |
|              | 125        | 420        | 189        | 613       |
|              | 150        | 480        | 236        | 647       |



## SP-329/SP-326

3D FORGED

One-piece 3D forged aluminum construction  
Dual adjust tilt angle

**Material:** 3D forged AL6061 shaft + Forged alloy clamps  
**Offset:** SP-329: 0mm  
SP-326: 15mm  
**Rise:** ±10°  
**Diameter:** Ø27.2 / Ø30.9 / Ø31.6mm  
**Length:** 250 / 300 / 350 / 400mm  
**Weight:** SP-329: 275.1g; Ø27.2 x 350mm  
SP-326: 346.2g; Ø27.2 x 350mm  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing :** 50pcs / ctn / 1.3cuft  
**Produced in :** Taiwan



## SP-3016 (ISO 4210)

3D FORGED

One-piece 3D forged aluminum construction  
Dual adjust tilt angle

**Material:** 3D forged AL6061 shaft + Forged alloy clamps  
**Offset:** 12.5mm  
**Rise:** -5°~+15°  
**Diameter:** Ø27.2 / Ø30.9 / Ø31.6  
**Length:** 250 / 300 / 350mm  
**Weight:** 310g; Ø27.2 x 350mm  
**Finish:** Black / Silver / Anodized  
**Packing :** 50pcs / ctn / 1.3cuft  
**Produced in :** China





## SP-307 (ISO 4210)

3D FORGED

One-piece 3D forged aluminum construction  
Dual side by side bolts with high strength-to-weight ratio head design

**Material:** 3D Forged AL6061  
**Offset:** 25mm  
**Rise:** -10°~+18°  
**Diameter:** Ø27.2 / Ø30.9 / Ø31.6mm  
**Length:** 250 / 300 / 350 / 400mm  
**Weight:** 230g; Ø27.2 x 300mm  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 50pcs / ctn / 1.3cuft  
**Produced in:** Taiwan

## SP-333

Super lightweight design

**Material:** AL7075-T6, full CNC machined.  
**Offset:** 3mm  
**Rise:** -10° ~ +20°  
**Diameter:** Ø30.9 / Ø31.6mm  
**Length:** 350 / 400mm  
**Weight:** 190.28g; Ø30.9 x 350mm  
 204.08g; Ø30.9 x 400mm:  
 169.12g; Ø31.6 x 350mm:  
 187.04g; Ø31.6 x 400mm:  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 50pcs / ctn / 1.88cuft  
**Produced in:** Taiwan



## SP-9064/SP-7064/SP-2064 (ISO 4210)

Dual adjust tilt angle

**Material:** SP-9064: Carbon shaft + Forged alloy head  
 SP-7064: AL2014 shaft + Forged alloy head  
 SP-2064: AL6061 shaft + Forged alloy head  
**Offset:** 0mm / 15mm  
**Rise:** -17°~+22° (Offset 0mm)  
 -9°~+30° (Offset 15mm)  
**Diameter:** SP-2064 / SP-7064: Ø25.4 ~ Ø31.6  
 SP-9064: Ø27.2 / Ø30.9 / Ø31.6  
**Length:** 250 / 300 / 350 / 400mm  
**Weight:** SP-2064: 330g; Ø27.2 (0mm) x 350mm  
 SP-2064: 342g; Ø27.2 (15mm) x 350mm  
 SP-7064: 300g; Ø27.2 (0mm) x 350mm  
 SP-7064: 312g; Ø27.2 (15mm) x 350mm  
 SP-9064: 260g; Ø27.2 (0mm) x 350mm  
 SP-9064: 272g; Ø27.2 (15mm) x 350mm  
**Finish:** SP-9064: Carbon Fiber 3K Weave  
 SP-2064 / SP-7064: Black / Silver / Anodized color / S.B. color  
**Packing:** 50pcs / ctn / 1.3cuft  
**Produced in:** Taiwan



## SP-9034/SP-7034/SP-2034

Dual adjust tilt angle

**Material:** SP-9034: Carbon shaft + Forged alloy head  
 SP-7034: AL2014 shaft + Forged alloy head  
 SP-2034: AL6061 shaft + Forged alloy head  
**Offset:** 15mm  
**Rise:** ±12°  
**Diameter:** SP-9034: Ø27.2 / Ø30.9 / Ø31.6mm  
 SP-7034 / SP-2034: Ø25.4 ~ Ø31.6mm  
**Length:** 250 / 300 / 350 / 400mm  
**Weight:** SP-9034: 278g; Ø27.2 x 350mm  
 SP-7034: 321g; Ø27.2 x 350mm  
 SP-2034: 351g; Ø27.2 x 350mm  
**Finish:** SP-9034: Carbon Fiber 3K Weave  
 SP-7034 / SP-2034: Black / Silver / Anodized / S.B. color  
**Packing:** 50pcs / ctn / 1.3cuft  
**Produced in:** Taiwan





**NEW**

### SP-2054 (ISO 4210\_MTB)

Dual adjust tilt angle  
65° Frame use

|                     |                                            |
|---------------------|--------------------------------------------|
| <b>Material:</b>    | AL6061 alloy shaft + Forged alloy head     |
| <b>Offset:</b>      | 8mm                                        |
| <b>Rise:</b>        | 0°                                         |
| <b>Diameter:</b>    | Ø31.6 / Ø34.9mm                            |
| <b>Length:</b>      | 350 / 400mm                                |
| <b>Weight:</b>      | 367g; Ø31.6 x 350mm<br>417g; Ø34.9 x 350mm |
| <b>Finish:</b>      | Black / Silver / Anodized / S.B. color     |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft                      |
| <b>Produced in:</b> | Taiwan                                     |

### SP-964/SP-764/SP-264 (ISO 4210)

Dual adjust tilt angle

|                     |                                                                                                                                        |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material:</b>    | SP-964: Carbon shaft + Forged alloy head<br>SP-764: AL2014 shaft + Forged alloy head<br>SP-264: AL6061 alloy shaft + Forged alloy head |
| <b>Offset:</b>      | 8mm                                                                                                                                    |
| <b>Rise:</b>        | ±13°                                                                                                                                   |
| <b>Diameter:</b>    | SP-964: Ø27.2 / Ø30.9 / Ø31.6mm<br>SP-764 / SP-264: Ø25.4~Ø31.6mm                                                                      |
| <b>Length:</b>      | 250 / 300 / 350 / 400mm                                                                                                                |
| <b>Weight:</b>      | SP-764: 222g; Ø27.2 x 300mm                                                                                                            |
| <b>Finish:</b>      | SP-964: Carbon Fiber 3K Weave<br>SP-764 / SP-264: Black / Silver / Anodized / S.B. color                                               |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft                                                                                                                  |
| <b>Produced in:</b> | Taiwan                                                                                                                                 |

SP-964



SP-745

### SP-945/SP-745/SP-245 (ISO 4210)

Dual adjust tilt angle

|                     |                                                                                                                                        |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material:</b>    | SP-945: Carbon shaft + Forged alloy head<br>SP-745: AL2014 shaft + Forged alloy head<br>SP-245: AL6061 alloy shaft + Forged alloy head |
| <b>Offset:</b>      | 20mm                                                                                                                                   |
| <b>Rise:</b>        | -13°~+8°                                                                                                                               |
| <b>Diameter:</b>    | SP-945: Ø27.2 / Ø30.9 / Ø31.6mm<br>SP-745 / SP-245: Ø25.4~Ø31.6mm                                                                      |
| <b>Length:</b>      | 250 / 300 / 350 / 400mm                                                                                                                |
| <b>Weight:</b>      | SP-745: 222g; Ø27.2 x 300mm                                                                                                            |
| <b>Finish:</b>      | SP-945: Carbon Fiber 3K Weave<br>SP-745 / SP-245: Black / Silver / Anodized / S.B. color                                               |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft                                                                                                                  |
| <b>Produced in:</b> | Taiwan                                                                                                                                 |

### SP-926/SP-726/SP-226 (ISO 4210)

|                     |                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Material:</b>    | SP-926: Carbon shaft + Forged alloy head<br>SP-726: AL2014 shaft + Forged alloy head<br>SP-226: AL6061 shaft + Forged alloy head |
| <b>Offset:</b>      | 0mm                                                                                                                              |
| <b>Rise:</b>        | ±12°                                                                                                                             |
| <b>Diameter:</b>    | SP-926: Ø27.2 / Ø30.9 / Ø31.6mm<br>SP-726 / SP-226: Ø25.4~Ø31.6mm                                                                |
| <b>Length:</b>      | 250 / 300 / 350 / 400mm                                                                                                          |
| <b>Weight:</b>      | SP-926: 228g; Ø27.2 x 300mm                                                                                                      |
| <b>Finish:</b>      | SP-926: Carbon Fiber 3K Weave<br>SP-726 / SP-226: Black / Silver / Anodized / S.B. color                                         |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft                                                                                                            |
| <b>Produced in:</b> | Taiwan                                                                                                                           |



SP-726



### SP-9032E/SP-7032E/SP-2032E

Easy to setup and release design  
Internal Routing

|                     |                                                                                                                                        |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material:</b>    | SP-9032E: Carbon shaft + Forged alloy head<br>SP-7032E: AL2014 shaft + Forged alloy head<br>SP-2032E: AL6061 shaft + Forged alloy head |
| <b>Offset:</b>      | 20mm                                                                                                                                   |
| <b>Rise:</b>        | ±13°                                                                                                                                   |
| <b>Diameter:</b>    | SP-9032E: Ø27.2 / Ø30.9 / Ø31.6mm<br>SP-7032E / SP-2032E: Ø25.4~Ø31.6mm                                                                |
| <b>Length:</b>      | 250 / 300 / 350 / 400mm                                                                                                                |
| <b>Weight:</b>      | SP-9032E: 273g; Ø 27.2 x 350mm<br>SP-7032E: 316g; Ø 27.2 x 350mm<br>SP-2032E: 346g; Ø 27.2 x 350mm                                     |
| <b>Finish:</b>      | SP-9032E: Carbon Fiber 3K Weave<br>SP-7032E / SP-2032E: Black / Silver / Anodized / S.B. color                                         |
| <b>Produced in:</b> | Taiwan                                                                                                                                 |



### SP-2028TLA

Easy to setup and release design  
Integrated with tail light & license plate mount

|                     |                                           |
|---------------------|-------------------------------------------|
| <b>Material:</b>    | AL6061 shaft + Forged alloy head / clamps |
| <b>Offset:</b>      | 18.5mm                                    |
| <b>Rise:</b>        | ±13°                                      |
| <b>Diameter:</b>    | Ø25.4~Ø31.6mm                             |
| <b>Length:</b>      | 250 / 300 / 350 / 400mm                   |
| <b>Weight:</b>      | 400.9g; Ø27.2 x 350mm                     |
| <b>Finish:</b>      | Black / Silver / Anodized / S.B. Color    |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft                     |
| <b>Produced in:</b> | Taiwan                                    |



SP-787

### SP-787/SP-287 (ISO 4210)

Side-taper clamping force design  
Single bolt with high strength-to-weight ratio head design

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| <b>Material:</b>    | SP-787: AL2014 shaft + Forged alloy head<br>SP-287: AL6061 shaft + Forged alloy head |
| <b>Offset:</b>      | 20mm                                                                                 |
| <b>Rise:</b>        | ±15°                                                                                 |
| <b>Diameter:</b>    | Ø25.4 ~Ø31.6mm                                                                       |
| <b>Length:</b>      | 250 / 300 / 350 / 400mm                                                              |
| <b>Weight:</b>      | SP-787: 243g; Ø27.2 x 300mm                                                          |
| <b>Finish:</b>      | Black / Silver / Anodized / S.B. color                                               |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft                                                                |
| <b>Produced in:</b> | Taiwan                                                                               |



### SP-279 (ISO 4210)

Dual side by side bolts with high strength-to-weight ratio head design

|                     |                                        |
|---------------------|----------------------------------------|
| <b>Material:</b>    | AL6061 shaft + Alloy head              |
| <b>Offset:</b>      | 25mm                                   |
| <b>Rise:</b>        | -10°~+18°                              |
| <b>Diameter:</b>    | Ø25.4~Ø31.6mm                          |
| <b>Length:</b>      | 250 / 300 / 350 / 400mm                |
| <b>Weight:</b>      | 283g; Ø27.2 x 300mm                    |
| <b>Finish:</b>      | Black / Silver / Anodized / S.B. color |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft                  |
| <b>Produced in:</b> | Taiwan                                 |



### SP-7016/SP-2016 (ISO 4210)

|                     |                                                                          |
|---------------------|--------------------------------------------------------------------------|
| <b>Material:</b>    | SP-7016: AL2014 shaft + Alloy head<br>SP-2016: AL6061 shaft + Alloy head |
| <b>Offset:</b>      | 12mm                                                                     |
| <b>Rise:</b>        | -8°~+12°                                                                 |
| <b>Diameter:</b>    | Ø27.2~Ø31.6 mm                                                           |
| <b>Length:</b>      | 250 / 300 / 350 / 400 mm                                                 |
| <b>Weight:</b>      | SP-2016: 313.6g; Ø27.2 x 350mm                                           |
| <b>Finish:</b>      | Black / Silver                                                           |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft                                                    |
| <b>Produced in:</b> | China / Taiwan                                                           |



### SP-7019/SP-2019 (ISO 4210)

|                     |                                                                          |
|---------------------|--------------------------------------------------------------------------|
| <b>Material:</b>    | SP-7019: AL2014 shaft + Alloy head<br>SP-2019: AL6061 shaft + Alloy head |
| <b>Offset:</b>      | 0mm                                                                      |
| <b>Rise:</b>        | -8°~+10°                                                                 |
| <b>Diameter:</b>    | Ø27.2~Ø31.6mm                                                            |
| <b>Length:</b>      | 300 / 350 / 400mm                                                        |
| <b>Weight:</b>      | SP-2019: 316g; Ø27.2 x 350mm                                             |
| <b>Finish:</b>      | Black / Silver                                                           |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft                                                    |
| <b>Produced in:</b> | China                                                                    |



### SP-928/SP-728/SP-228 (ISO 4210)

|                     |                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Material:</b>    | SP-928: Carbon shaft + Forged alloy head<br>SP-728: AL2014 shaft + Forged alloy head<br>SP-228: AL6061 shaft + Forged alloy head |
| <b>Offset:</b>      | 17mm                                                                                                                             |
| <b>Rise:</b>        | -10°~+20°                                                                                                                        |
| <b>Diameter:</b>    | SP-928: Ø27.2 / Ø30.9 / Ø31.6mm<br>SP-728 / SP-228: Ø25.4~Ø31.6mm                                                                |
| <b>Length:</b>      | 250 / 300 / 350 / 400mm                                                                                                          |
| <b>Weight:</b>      | SP-928: 219g; Ø27.2 x 300mm                                                                                                      |
| <b>Finish:</b>      | SP-928: Carbon Fiber 3K Weave<br>SP-728 / SP-228: Black / Silver / Anodized / S.B. color                                         |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft                                                                                                            |
| <b>Produced in:</b> | Taiwan                                                                                                                           |

SP-728



### SP-2013

|                     |                           |
|---------------------|---------------------------|
| <b>Material:</b>    | AL6061 shaft + Alloy head |
| <b>Offset:</b>      | 23.5mm                    |
| <b>Rise:</b>        | ±13°                      |
| <b>Diameter:</b>    | Ø27.2 / Ø30.9 / Ø31.6mm   |
| <b>Length:</b>      | 300 / 350 / 400mm         |
| <b>Weight:</b>      | 241.4g; Ø30.9 x 350mm     |
| <b>Finish:</b>      | Black / Silver            |
| <b>Packing:</b>     | 50pcs / ctn / 1.3cuft     |
| <b>Produced in:</b> | China                     |



SP-222

SP-252

### SP-222 (ISO 4210) SP-252

|              |                                                            |
|--------------|------------------------------------------------------------|
| Material:    | AL6061 shaft + Alloy head                                  |
| Offset:      | 17mm                                                       |
| Rise:        | -10°~+20°                                                  |
| Diameter:    | Ø25.4~Ø31.6mm                                              |
| Length:      | 250 / 300 / 350 / 400mm                                    |
| Weight:      | SP-222: 303g; Ø27.2 x 300mm<br>SP-252: 329g; Ø27.2 x 300mm |
| Finish:      | Black / Silver / Anodized / S.B. color                     |
| Packing:     | 50pcs / ctn / 1.3cuft                                      |
| Produced in: | SP-222: Taiwan<br>SP-252: China                            |



### SP-875TLA

Suspension seat post for easy to setup and release design  
Integrated with tail light & License plate mount  
Virtually no sideplay

|              |                                                   |
|--------------|---------------------------------------------------|
| Material:    | AL6061 shaft + Forged alloy head / clamps / mount |
| Travel:      | 40mm                                              |
| Offset:      | 18.5mm                                            |
| Rise:        | ±13°                                              |
| Diameter:    | Ø27.2 / Ø 30.9 / Ø31.6mm                          |
| Length:      | 300 / 350mm (Spring)                              |
| Weight:      | 450g; Ø27.2 x 350mm                               |
| Finish:      | Black / Silver / Anodized / S.B. color            |
| Packing:     | 50pcs / ctn / 1.3cuft                             |
| Produced in: | Taiwan                                            |



### SP-877B (EN 15194)

Dual bolt suspension seat post  
Virtually no sideplay

|              |                                           |
|--------------|-------------------------------------------|
| Material:    | AL6061 shaft + Forged alloy head / clamps |
| Travel:      | 40mm                                      |
| Offset:      | 0mm                                       |
| Rise:        | -8°~+12°                                  |
| Diameter:    | Ø34.9mm                                   |
| Length:      | 350 / 400 / 450mm (MCU / Spring)          |
| Weight:      | 638g; Ø34.9 x 400mm (MCU)                 |
| Finish:      | Black / Silver / Anodized / S.B. color    |
| Packing:     | 50pcs / ctn / 1.3cuft                     |
| Produced in: | Taiwan                                    |


**NEW**

### SP-874 (ISO 4210)

Dual bolt Suspension Seat Post  
Virtually no sideplay

|              |                                              |
|--------------|----------------------------------------------|
| Material:    | AL6061 shaft + Forged alloy head / clamps    |
| Travel:      | 40mm                                         |
| Offset:      | 12mm                                         |
| Rise:        | -8°~+12°                                     |
| Diameter:    | Ø30.9 / Ø31.6mm                              |
| Length:      | 300 / 350mm (MCU / Spring)                   |
| Weight:      | 511g; Ø30.9 x 350mm (MCU)                    |
| Finish:      | Black / Silver / Anodized color / S.B. color |
| Packing:     | 50pcs / ctn / 1.3cuft                        |
| Produced in: | Taiwan                                       |





### SP-877 (ISO 4210 C)

Dual bolt suspension seat post  
Virtually no sideplay


|              |                                        |
|--------------|----------------------------------------|
| Material:    | AL6061 shaft + AL6061 head             |
| Travel:      | 40mm                                   |
| Offset:      | 12mm                                   |
| Rise:        | -8°~+12°                               |
| Diameter:    | Ø27.2 / Ø30.9 / Ø31.6mm                |
| Length:      | 300 / 350 (MCU); 350mm (Spring)        |
| Weight:      | 425g; Ø27.2 x 350mm (MCU)              |
| Finish:      | Black / Silver / Anodized / S.B. color |
| Packing:     | 50pcs / ctn / 1.3cuft                  |
| Produced in: | Taiwan                                 |



### SP-866 (ISO 4210.MTB)

Suspension seat post  
3 key ways keep minimal side play & 2 springs in series enhancing comfort

|              |                                                                                          |
|--------------|------------------------------------------------------------------------------------------|
| Material:    | AL6061 shaft + Forged alloy head                                                         |
| Travel:      | 45mm                                                                                     |
| Offset:      | 0mm                                                                                      |
| Rise:        | ±13°                                                                                     |
| Diameter:    | Ø30.9 / Ø31.6mm                                                                          |
| Length:      | 300 / 350 / 400mm                                                                        |
| Weight:      | 560g; Ø30.9 x 350mm<br>580g; Ø31.6 x 350mm<br>660g; Ø30.9 x 400mm<br>680g; Ø31.6 x 400mm |
| Finish:      | Black / Silver / Anodized / S.B. color                                                   |
| Packing:     | 50pcs / ctn / 1.3cuft                                                                    |
| Produced in: | Taiwan                                                                                   |

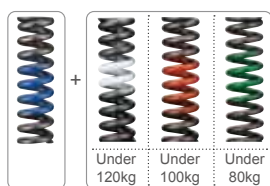

### SP-895 (ISO 4210 C)

Suspension (spring / MCU.) with micro angle adjustment clamps

|              |                                        |
|--------------|----------------------------------------|
| Material:    | AL6061 shaft + Forged Alloy head       |
| Travel:      | 40mm                                   |
| Offset:      | 17mm                                   |
| Rise:        | -10°~+20°                              |
| Diameter:    | Ø27.2 / Ø31.6mm                        |
| Length:      | 305 / 355 (MCU) / 355mm (Spring)       |
| Weight:      | 454g; Ø27.2 x 355mm (MCU)              |
| Finish:      | Black / Silver / Anodized / S.B. color |
| Packing:     | 50pcs / ctn / 1.3cuft                  |
| Produced in: | Taiwan                                 |



### SP-869

|              |                                |
|--------------|--------------------------------|
| Material:    | AL6061 shaft + Alloy head      |
| Travel:      | 40mm                           |
| Offset:      | 10mm                           |
| Rise:        | ±10°                           |
| Diameter:    | Ø27.2                          |
| Length:      | 300 / 350mm                    |
| Weight:      | 538.4g; Ø27.2 x 350mm (Spring) |
| Finish:      | Black / Silver                 |
| Packing:     | 50Pcs / ctn / 1 cuft           |
| Produced in: | China                          |

**SP-886 (ISO 4210 C)**

Suspension with micro angle adjustment clamps

|              |                                        |
|--------------|----------------------------------------|
| Material:    | Alloy                                  |
| Travel:      | 40mm                                   |
| Offset:      | 20mm                                   |
| Rise:        | -10°~+20°                              |
| Diameter:    | Ø25.4~Ø31.8mm                          |
| Length:      | 300 / 350 / 400mm                      |
| Weight:      | 474g; Ø27.2 x 300mm                    |
| Finish:      | Black / Silver / Anodized / S.B. color |
| Packing:     | 50pcs / ctn / 1.3cuft                  |
| Produced in: | Taiwan / China                         |

**SP-868**

Dual-bolt head for security and wide-angle adjustment  
Two-stage spring tension design, wide range of adjustability accommodates all rider weights

|              |                       |
|--------------|-----------------------|
| Material:    | Alloy                 |
| Travel:      | 40mm                  |
| Offset:      | 12mm                  |
| Rise:        | -5°~+12°              |
| Diameter:    | Ø25.4~Ø31.8mm         |
| Length:      | 300mm                 |
| Weight:      | 500g; Ø27.2 x 300mm   |
| Finish:      | Black / Silver        |
| Packing:     | 50pcs / ctn / 1.3cuft |
| Produced in: | China                 |

**SP-871 (ISO 4210 C)**

Suspension with dual adjust tilt angle.

|              |                              |
|--------------|------------------------------|
| Material:    | Alloy                        |
| Travel:      | 40mm                         |
| Offset:      | 12mm                         |
| Rise:        | -8°~+12°                     |
| Diameter:    | Ø25.4~Ø31.8mm                |
| Length:      | 300 / 350 / 400mm            |
| Weight:      | 544g; Ø27.2 x 350mm (Spring) |
| Finish:      | Black / Silver               |
| Packing:     | 50pcs / ctn / 1.3cuft        |
| Produced in: | Taiwan                       |

**SP-584 (ISO 4210 C)**

Suspension with micro angle adjustment clamps

|              |                       |
|--------------|-----------------------|
| Material:    | Alloy                 |
| Travel:      | 40mm                  |
| Offset:      | 0mm                   |
| Diameter:    | Ø25.4~Ø31.8mm         |
| Length:      | 300 / 350 / 400mm     |
| Weight:      | 417g; Ø27.2 x 300mm   |
| Finish:      | Black / Silver        |
| Packing:     | 50pcs / ctn / 1.3cuft |
| Produced in: | China                 |



SP-501A

**SP-501A/501S (ISO 4210 C)**

|              |                                                                      |
|--------------|----------------------------------------------------------------------|
| Material:    | SP-501A: Alloy tube straight pattern<br>SP-501S: High-strength steel |
| Diameter:    | Ø25.4~Ø31.8mm                                                        |
| Length:      | 190~400mm                                                            |
| Weight:      | SP-501S: 333g; Ø27.2 x 300mm                                         |
| Finish:      | SP-501A: Black / Silver<br>SP-501S: Black                            |
| Packing:     | 50pcs / ctn / 1.3cuft                                                |
| Produced in: | Taiwan / China                                                       |



**NEW**

## MX-160

Forged aluminum alloy clamp

Clamp I.D.: Ø35mm  
Weight: 12.36g  
Finish: Black / Silver / Anodized / S.B. color  
Packing: 250pcs / ctn / 0.53cuft  
Produced in: Taiwan



## MX-95RT

MTB seat post clamp design  
Forged aluminum alloy

Clamp I.D.: Ø31.8 / Ø35mm  
Weight: 18.6g; Ø31.8 / 17.4g; Ø35  
Finish: Black / Silver / Anodized / S.B. color  
Packing: 250pcs / ctn / 0.53cuft  
Produced in: Taiwan



**NEW**

## MX-120RT

Forged aluminum alloy clamp

Clamp I.D.: Ø31.8mm  
Weight: 26g  
Finish: Black / Silver / Anodized / S.B. color  
Packing: 250pcs / ctn / 0.53cuft  
Produced in: Taiwan



MX-112C



MX-112

## MX-112/MX-112C

Aluminum alloy seat clamp  
Light weight design

Clamp I.D.: Ø29.8 / Ø31.8 / Ø35mm  
Weight: MX-112: 16.2g; Ø29.8 / 14.8g; Ø31.8 / 17.2g; Ø35  
MX-112C: 15g; Ø29.8 / 13.6g; Ø31.8 / 14.4g; Ø35  
Finish: Black / Silver / Anodized / S.B. color  
Packing: 250pcs / ctn / 0.53cuft  
Produced in: Taiwan



## MX-86

Forged aluminum alloy clamp

Clamp I.D.: Ø25.4 / Ø31.8 / Ø35mm  
Weight: 15g; Ø25.4 / 15.64g; Ø31.8 / 20.88g; Ø35  
Finish: Black / Red / Blue / Gold / Anodized  
Packing: 250pcs / ctn / 0.53cuft  
Produced in: Taiwan



### MX-88

Forged aluminum alloy clamp for MTB  
SST bolt and Nut 7075 aluminum alloy

**Clamp I.D.:** Ø35 / Ø36.4 / Ø38.1mm  
**Weight:** 20g; Ø35 / 20.5g; Ø36.4 / 23.5g; Ø38.1  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 0.66cuft  
**Produced in:** Taiwan



### MX-83

MTB seat post clamp design  
Clamping of rack function  
Forged aluminum alloy

**Clamp I.D.:** Ø28.6 / Ø31.8 / Ø35mm  
**Weight:** 45.7g; Ø28.6 / 40.3g; Ø31.8 / 38.9g; Ø35  
**Finish:** Anodized Black / Silver  
**Packing:** 250pcs / ctn / 0.73cuft  
**Produced in:** Taiwan



### MX-62

Forged aluminum alloy clamp

**Clamp I.D.:** Ø31.8 / Ø35mm  
**Weight:** 20.6g; Ø31.8 / 22.8g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 0.53cuft  
**Produced in:** Taiwan



### MX-57

Forged aluminum alloy clamp

**Clamp I.D.:** Ø31.8 / Ø35mm  
**Weight:** 29g; Ø31.8 / 31.2g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 0.66cuft  
**Produced in:** Taiwan



### MX-37RT/AL/TI

Forged aluminum alloy clamp for MTB  
MX-37RT: Anti-rusted Steel bolt & nut  
MX-37AL: Stainless bolt & #7075 alloy nut  
MX-37TI: Titanium bolt & #7075 alloy nut

**Clamp I.D.:** Ø31.8 / Ø35mm  
**Weight:** 25g / 23g / 20g; Ø31.8  
25g / 23g / 21g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. / CP color  
**Packing:** 250pcs / ctn / 0.66cuft  
**Produced in:** Taiwan



### MX-36RT/AL

Forged aluminum alloy clamp for Road Bike

MX-36RT: Anti-rusted Steel bolt & nut

MX-36AL: Stainless bolt & #7075 alloy nut

Clamp I.D.: Ø31.8 / Ø35mm

Weight: 21g / 18g / 17g; Ø31.8

25g / 18g / 17g; Ø35

Finish: Black / Silver / Anodized / S.B. / CP color

Packing: 250pcs / ctn / 0.66cuf

Produced in: China



### MX-30RT

Forged aluminum alloy clamp for Road Bike

Clamp I.D.: Ø28.6 / Ø29.8 / Ø31.8 / Ø35mm

Weight: 19g; Ø28.6 / 26g; Ø29.8 / 23g; Ø31.8 / 24g; Ø35

Finish: Black / Silver / Anodized / S.B. / CP color

Packing: 250pcs / ctn / 0.66cuf

Produced in: Taiwan / China



### MX-38RT

Aluminum alloy seat clamp for MTB / Road Bike

Clamp I.D.: Ø28.6 / Ø31.8 / Ø34.9 / Ø38.1mm

Weight: 25g; Ø31.8

Finish: Black / Silver / Anodized / S.B. color

Packing: 250pcs / ctn / 0.66cuf

Produced in: China



### MX-27

Aluminum alloy clamp for BMX / Free Style

Clamp I.D.: Ø28.6 / Ø31.8 / Ø35mm

Weight: 44g; Ø28.6 / 35g; Ø31.8

Finish: Black / Silver / Anodized / S.B. color

Packing: 250pcs / ctn / 0.53cuf

Produced in: Taiwan / China



### MX-28

Aluminum alloy clamp for BMX / Free Style / MTB

Clamp I.D.: Ø25.4 / Ø28.6 / Ø31.8 / Ø35 / Ø38.1mm

Weight: 25g; Ø25.4 / 26g; Ø31.8

Finish: Black / Silver / Anodized / S.B. color

Packing: 250pcs / ctn / 0.66cuf

Produced in: Taiwan / China



**412QX**

MTB seat post clamp design

Longer leverage QR lever designed

The seat clamp is designed w/o washer between lever and clamp

Forged aluminum alloy clamp W/QR

**Clamp I.D.:** Ø31.8 / Ø34.9 / Ø38.1mm

**Weight:** 28.4g; Ø31.8 / 31.3g; Ø34.9 / 34.3g; Ø38.1

**Finish:** High polished anodized Black / Gold / Red / Blue

**Packing:** 250pcs / ctn / 0.73cuft

**Produced in:** Taiwan

**402QX**

The seat clamp is designed w/o washer between lever and clamp

Forged aluminum alloy clamp W/QR

**Clamp I.D.:** Ø31.8 / Ø35mm

**Weight:** 26.6g; Ø31.8 / 28.8g; Ø35

**Finish:** High polished anodized Black / Gold / Red / Blue

**Packing:** 250pcs / ctn / 0.73cuft

**Produced in:** Taiwan

**339QX**

Low-profile & longer leverage QR lever designed

The seat clamp is designed without washer between lever and clamp

"Zero" friction & perfect match skewer, CNC & Fine polished surface.

Hand friendly clamp & lever

Aluminum alloy Clamp

**Clamp I.D.:** Ø31.8 / Ø35mm

**Weight:** 40.4g; Ø31.8 / 40g; Ø35

**Finish:** Anodized color

**Packing:** 250pcs / ctn / 0.87cuft

**Produced in:** Taiwan / China

**335QX**

Low-profile & longer leverage QR lever designed

The seat clamp is designed without washer between lever and clamp

"Zero" friction & perfect match skewer, CNC & Fine polished surface.

Hand friendly clamp & lever

Aluminum alloy Clamp

**Clamp I.D.:** Ø31.8 / Ø35 / Ø38.1mm

**Weight:** 40.4g; Ø31.8 / 40g; Ø35 / 41.5g; Ø38.1

**Finish:** Anodized color

**Packing:** 250pcs / ctn / 0.87cuft

**Produced in:** Taiwan / China



210QET

## 210QE/210QET

Teflon coated spacer

210Q: Forged aluminum alloy clamp w/ lever

210QET: Aluminum alloy clamp w/ forged aluminum alloy lever

**Clamp I.D.:** 210QE: Ø31.8 / Ø35mm  
210QET: Ø31.8 / Ø35mm  
**Weight:** 40g; Ø31.8 / 42.1g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 0.87cuft  
**Produced in:** Taiwan



## 362Q

Forged aluminum alloy clamp w/ lever

**Clamp I.D.:** Ø31.8 / Ø35mm  
**Weight:** 53.6g; Ø31.8 / 55.8g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 0.66cuft  
**Produced in:** Taiwan



207QE

## 207Q/207QE

207Q: Forged aluminum alloy clamp w/ lever

207QE: Aluminum alloy clamp w/ Forged aluminum alloy lever

**Clamp I.D.:** 207Q: Ø31.8  
207QE: Ø29.8 / Ø31.8 / Ø35mm  
**Option:** Teflon coated spacer  
**Weight:** 207Q: 40g; Ø31.8  
207QE: 44.4g; Ø29.8 / 45g; Ø31.8 / 46g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 0.87cuft  
**Produced in:** Taiwan



## 327Q

Aluminum alloy seat clamp w/ Forged aluminum alloy lever

**Clamp I.D.:** Ø31.8 / Ø35mm  
**Weight:** 45g; Ø31.8 / 45.2g; Ø35  
**Finish:** Black / Silver / Anodized color  
**Packing:** 250pcs / ctn / 0.66cuft  
**Produced in:** China



## 209Q

Forged aluminum alloy clamp & lever

**Clamp I.D.:** Ø31.8 / Ø35mm  
**Weight:** 46g; Ø31.8 / 48g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 0.87cuft  
**Produced in:** Taiwan

**342Q**

Aluminum alloy clamp w/ machined-window lever

**Clamp I.D.:** Ø31.8 / Ø35mm  
**Option:** Teflon coated spacer  
**Weight:** 42g; Ø31.8 / 39g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 1.16cuft  
**Produced in:** China

**319Q**

Aluminum alloy seat clamp w/ lever for MTB

**Clamp I.D.:** Ø28.6 / Ø31.8 / Ø35 / Ø36.4mm  
**Weight:** 50g; Ø31.8 / 53g; Ø35 / 53.3g; Ø36.4  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 1.16cuft  
**Produced in:** China

**314Q**

Aluminum alloy seat clamp w/ lever

**Clamp I.D.:** Ø28.6 / Ø31.8 / Ø35mm  
**Weight:** 48g; Ø28.6 / 47g; Ø31.8 / 48g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 1.16cuft  
**Produced in:** China

**318Q**

Aluminum alloy seat clamp w/ lever

**Clamp I.D.:** Ø28.6 / Ø31.8 / Ø35mm  
**Weight:** 48.3g; Ø28.6 / 48g; Ø31.8 / 48.28g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 1.16cuft  
**Produced in:** China

**312Q**

Aluminum alloy seat clamp w/ lever

**Clamp I.D.:** Ø28.6 / Ø31.8 / Ø35mm  
**Weight:** 47g; Ø28.6 / 49g; Ø31.8 / 50g; Ø35  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 250pcs / ctn / 1.16cuft  
**Produced in:** China



**NEW**

### DA-2048LSP (ISO 4210\_MTB) (EN 15194)

4-bolt ahead stem

Compatible With **SP CONNECT** System

Compatible With **ACROS** Headset ICR OR **TOKEN** Headset Cable Box System

Face plate with light mount



|               |                                            |
|---------------|--------------------------------------------|
| Material:     | Forged AL6061                              |
| Extension:    | 60 / 75mm                                  |
| Rise:         | 60mm ext. : +10° / +35° ; 75mm ext. : +10° |
| Bar bore:     | Ø31.8                                      |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                            |
| Stack height: | 40mm                                       |
| Weight:       | 320g ; Ø31.8 x 60mm +35° ext.              |
| Finish:       | Black / Silver / Anodized / S.B. color     |
| Packing:      | 50pcs / ctn / 0.87cuft                     |
| Produced in:  | Taiwan                                     |



### DA-2048SP (ISO 4210\_MTB) (EN 15194)

4-bolt ahead stem

Compatible With **SP CONNECT** System

Compatible With **ACROS** Headset ICR OR **TOKEN** Headset Cable Box System



|               |                                            |
|---------------|--------------------------------------------|
| Material:     | Forged AL6061                              |
| Extension:    | 60 / 75mm                                  |
| Rise:         | 60mm ext. : +10° / +35° ; 75mm ext. : +10° |
| Bar bore :    | Ø31.8                                      |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                            |
| Stack height: | 40mm                                       |
| Weight:       | 320g; Ø31.8 x 60mm +35° ext.               |
| Finish:       | Black / Silver / Anodized / S.B. color     |
| Packing:      | 50pcs / ctn / 0.87cuft                     |
| Produced in:  | Taiwan                                     |



### DA-20125 (C) (ISO 4210)

3D forged AL6061 , 4-bolt ahead stem

Compatible With **TOKEN** Headset Cable Box System

|               |                                        |
|---------------|----------------------------------------|
| Extension:    | 50mm                                   |
| Rise:         | 0°                                     |
| Bar bore :    | Ø35mm                                  |
| Clamp I.D. :  | Ø28.6mm                                |
| Stack height: | 42.4mm                                 |
| Weight:       | 189g; 50mm ext.                        |
| Finish:       | Black / Silver / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.66cuft                 |
| Produced in:  | Taiwan                                 |



### DA-2012 (C) (ISO 4210)

3D forged AL6061 , 4-bolt ahead stem

Compatible With **TOKEN** Headset Cable Box System

|               |                               |
|---------------|-------------------------------|
| Extension:    | 50mm                          |
| Rise:         | 0°                            |
| Bar bore :    | Ø31.8mm                       |
| Clamp I.D.:   | Ø28.6 mm                      |
| Stack height: | 42.4mm                        |
| Weight:       | 188.4g; 50mm ext.             |
| Finish:       | Black / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.66cuft        |
| Produced in:  | Taiwan                        |



## DA-2037

3D forged AL6061 , 4-bolt ahead stem

Compatible With FSA Headset ICR

|               |                                        |
|---------------|----------------------------------------|
| Extension:    | 80 / 90 / 100 / 110mm                  |
| Rise:         | 0°                                     |
| Bar bore :    | Ø31.8mm                                |
| Clamp I.D. :  | Ø28.6 mm                               |
| Stack height: | 40mm                                   |
| Weight:       | 236g; Ø31.8 x 80mm ext.                |
| Finish:       | Black / Silver / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.87cuft                 |
| Produced in:  | Taiwan                                 |



## RA-204 [C] (ISO 4210)

3D forged AL6061 , 4-bolt ahead stem

Compatible With TOKEN Headset Cable Box System

|               |                                        |
|---------------|----------------------------------------|
| Extension:    | 60 / 70 / 80 / 90 / 100 / 110mm        |
| Rise:         | -6°                                    |
| Bar bore:     | Ø31.8mm                                |
| Clamp I.D. :  | Ø28.6mm                                |
| Stack height: | 40mm                                   |
| Weight:       | 213.7g; Ø31.8 x 80mm ext.              |
| Finish:       | Black / Silver / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.87cuft                 |
| Produced in:  | Taiwan                                 |



## DA-567 (ISO 4210)



AL7075 with CNC machining, 4-bolt ahead stem

Wide oversize bar bore with carbon friendly design

|               |                                     |
|---------------|-------------------------------------|
| Extension:    | 35mm                                |
| Rise:         | 0°                                  |
| Bar bore :    | Ø35mm                               |
| Clamp I.D. :  | Ø28.6mm                             |
| Stack height: | 39mm                                |
| Weight:       | 138g                                |
| Finish:       | High Polish / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.87cuft              |
| Produced in:  | Taiwan                              |



## DA-242 (ISO 4210)



3D forged AL6061 with CNC machining, 4-bolt ahead stem

Wide oversize bar bore with carbon friendly for steerer tube

|               |                                     |
|---------------|-------------------------------------|
| Extension:    | 35 / 45 / 55 / 65mm                 |
| Rise:         | 0°                                  |
| Bar bore :    | Ø35mm                               |
| Clamp I.D. :  | Ø28.6mm                             |
| Stack height: | 38mm<br>40mm; 35mm ext.             |
| Weight:       | 136g; 35mm ext.                     |
| Finish:       | High Polish / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.87cuft              |
| Produced in:  | Taiwan                              |





### DA-2055 (ISO 4210)

|               |                                                       |
|---------------|-------------------------------------------------------|
| Material:     | Forged AL6061                                         |
| Extension:    | 35 / 45 / 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm |
| Rise:         | ±6°                                                   |
| Bar bore :    | Ø35mm                                                 |
| Clamp I.D. :  | Ø28.6mm                                               |
| Stack height: | 42mm; 45 / 60-130mm ext.<br>43mm; 35mm ext.           |
| Weight:       | 118.4g; Ø35 x 80mm ext.                               |
| Finish:       | Black / Silver / Anodized / S.B.color                 |
| Packing:      | 50pcs / ctn / 0.87cuft                                |
| Produced in:  | Taiwan                                                |



### DA-241 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem

|               |                                                                       |
|---------------|-----------------------------------------------------------------------|
| Extension:    | 0°: 40 / 50 / 60mm<br>6°: 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm |
| Rise:         | 0° / ±6°                                                              |
| Bar bore :    | Ø35mm                                                                 |
| Clamp I.D. :  | Ø25.4 / Ø28.6mm                                                       |
| Stack height: | 37mm                                                                  |
| Weight:       | 144g; Ø35 x 100mm ext.                                                |
| Finish:       | Black / Silver / Anodized / S.B. color                                |
| Packing:      | 50pcs / ctn / 0.87cuft                                                |
| Produced in:  | Taiwan                                                                |



### DA-2428 (ISO 4210)



3D forged AL6061 with CNC machining, 4-bolt ahead stem  
Wide oversize

|               |                                     |
|---------------|-------------------------------------|
| Extension:    | 35 / 45mm                           |
| Rise:         | 0°                                  |
| Bar bore :    | Ø31.8mm                             |
| Clamp I.D.:   | Ø28.6mm                             |
| Stack height: | 40mm; 35mm ext.<br>38mm; 45mm ext.  |
| Weight:       | 142g; Ø31.8 x 35mm ext.             |
| Finish:       | High Polish / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.87cuft              |
| Produced in:  | Taiwan                              |



6°



17°

### DA-205 (6°/17°) (ISO 4210)

3D forged AL6061 , 4-bolt ahead stem

|               |                                                                                                           |
|---------------|-----------------------------------------------------------------------------------------------------------|
| Extension:    | 6° : 35 / 45 / 60 / 70 / 80 / 90 / 100 / 110 / 120mm<br>17° : 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm |
| Rise:         | 6° : ±6°<br>17° : ±17°                                                                                    |
| Bar bore:     | Ø31.8mm                                                                                                   |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                                                                                           |
| Stack Height: | 6° : 37mm<br>17° : 40mm                                                                                   |
| Weight:       | 6° : 125g; Ø31.8 x 90mm ext.<br>17° : 129.5g; Ø31.8 x 90mm ext.                                           |
| Finish:       | Black / Silver / Anodized / S.B. color                                                                    |
| Packing:      | 50pcs / ctn / 0.87 cuft                                                                                   |
| Produced in:  | Taiwan                                                                                                    |

**DA-205S (ISO 4210)**

3D forged AL6061 , 4-bolt ahead stem

|                      |                                                                             |
|----------------------|-----------------------------------------------------------------------------|
| <b>Extension:</b>    | 35 / 60mm                                                                   |
| <b>Rise:</b>         | 6°                                                                          |
| <b>Bar bore:</b>     | Ø25.4mm                                                                     |
| <b>Clamp I.D.:</b>   | Ø25.4mm; 35mm ext.<br>Ø28.6mm; 35 / 60mm ext.                               |
| <b>Stack Height:</b> | 37mm                                                                        |
| <b>Weight:</b>       | 57g; Ø25.4 x 35mm ext<br>42.6g; Ø28.6 x 35mm ext<br>61.9g; Ø28.6 x 60mm ext |
| <b>Finish:</b>       | Black / Silver / Anodized / S.B. color                                      |
| <b>Packing:</b>      | 50pcs / ctn / 0.87cuft                                                      |
| <b>Produced in:</b>  | Taiwan / China                                                              |

**DA-274 (ISO 4210)**

3D forged AL6061, 4-bolt ahead stem

|                      |                                             |
|----------------------|---------------------------------------------|
| <b>Extension:</b>    | 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm |
| <b>Rise:</b>         | ±6°                                         |
| <b>Bar bore :</b>    | Ø31.8mm                                     |
| <b>Clamp I.D. :</b>  | Ø25.4 / Ø28.6mm                             |
| <b>Stack height:</b> | 37mm                                        |
| <b>Weight:</b>       | 137g; Ø31.8 x 100mm ext.                    |
| <b>Finish:</b>       | Black / Silver / Anodized / S.B. color      |
| <b>Packing:</b>      | 50pcs / ctn / 0.87cuft                      |
| <b>Produced in:</b>  | Taiwan                                      |

**DA-296 (ISO 4210)**

3D forged AL6061, 4-bolt ahead stem

|                      |                                             |
|----------------------|---------------------------------------------|
| <b>Extension:</b>    | 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm |
| <b>Rise:</b>         | ±6°                                         |
| <b>Bar bore :</b>    | Ø31.8mm                                     |
| <b>Clamp I.D. :</b>  | Ø25.4 / Ø28.6mm                             |
| <b>Stack height:</b> | 37mm                                        |
| <b>Weight:</b>       | 137g; Ø31.8 x 100mm ext.                    |
| <b>Finish:</b>       | Black / Silver / Anodized / S.B. color      |
| <b>Packing:</b>      | 50pcs / ctn / 0.87cuft                      |
| <b>Produced in:</b>  | Taiwan                                      |



DA-250D



DA-281

**DA-250D/DA-281 (ISO 4210)**

3D forged AL6061 , 4-bolt ahead stem

Carbon friendly for steerer tube  
Alloy handlebar only

|                      |                                             |
|----------------------|---------------------------------------------|
| <b>Extension:</b>    | 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm |
| <b>Rise:</b>         | ±6°                                         |
| <b>Bar bore :</b>    | Ø31.8mm                                     |
| <b>Clamp I.D. :</b>  | Ø25.4 / Ø28.6mm                             |
| <b>Stack height:</b> | 37mm                                        |
| <b>Weight:</b>       | 133.4g; Ø31.8 x 110mm ext.                  |
| <b>Finish:</b>       | Black / Silver / Anodized / S.B. color      |
| <b>Packing:</b>      | 50pcs / ctn / 0.87cuft                      |
| <b>Produced in:</b>  | Taiwan                                      |



DA-282



DA-283



DA-285

## DA-282/DA-283/DA-285 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem  
Carbon handlebar friendly

|               |                                                                                                           |
|---------------|-----------------------------------------------------------------------------------------------------------|
| Extension:    | 50 / 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm                                                          |
| Rise:         | ±7°                                                                                                       |
| Bar bore:     | Ø31.8mm                                                                                                   |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                                                                                           |
| Stack height: | 40mm                                                                                                      |
| Weight:       | DA-282: 148g; Ø31.8 x 90mm ext.<br>DA-283: 151.1g; Ø31.8 x 90mm ext.<br>DA-285: 152.5g; Ø31.8 x 90mm ext. |
| Finish:       | Black / Silver / Anodized / S.B. Color                                                                    |
| Packing:      | 50pcs / ctn / 0.87cuft                                                                                    |
| Produced in:  | Taiwan                                                                                                    |

## DA-249 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem

|               |                                        |
|---------------|----------------------------------------|
| Extension:    | 80 / 90 / 100 / 110mm                  |
| Rise:         | 0°                                     |
| Bar bore:     | Ø31.8mm                                |
| Clamp I.D.:   | Ø28.6mm                                |
| Stack height: | 39.5mm                                 |
| Weight:       | 142g; Ø31.8 x 80mm ext.                |
| Finish:       | Black / Silver / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.87cuft                 |
| Produced in:  | Taiwan                                 |

## DA-303 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem  
Alloy handlebar only

|               |                                                                               |
|---------------|-------------------------------------------------------------------------------|
| Extension:    | 70 / 80 / 90mm                                                                |
| Rise:         | ±6°                                                                           |
| Bar bore:     | Ø31.8mm                                                                       |
| Stack height: | 43mm                                                                          |
| Weight:       | 153g; Ø31.8 x 70mm ext.<br>160g; Ø31.8 x 80mm ext.<br>167g; Ø31.8 x 90mm ext. |
| Finish:       | Black / Silver / Anodized                                                     |
| Packing:      | 50pcs / ctn / 0.87cuft                                                        |
| Produced in:  | China                                                                         |

## DA-230 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem  
Face plate with light mount

|               |                                             |
|---------------|---------------------------------------------|
| Extension:    | 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm |
| Rise:         | ±6°                                         |
| Bar bore:     | Ø31.8mm                                     |
| Clamp I.D.:   | Ø28.6mm                                     |
| Stack height: | 37mm                                        |
| Weight:       | 143g; Ø31.8 x 100mm ext.                    |
| Finish:       | Black / Silver / Anodized / S.B. color      |
| Packing:      | 50pcs / ctn / 0.87cuft                      |
| Produced in:  | Taiwan                                      |



**DA-254 (ISO 4210)**

3D forged AL6061, 4-bolt ahead stem

|               |                                             |
|---------------|---------------------------------------------|
| Extension:    | 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm |
| Rise:         | ±6° / 35°                                   |
| Bar bore:     | Ø25.4 / Ø31.8mm                             |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                             |
| Stack Height: | 36mm                                        |
| Weight:       | 240g; Ø31.8 x 90mm ext.                     |
| Finish:       | Black / Silver / Anodized / S.B. color      |
| Packing:      | 50pcs / ctn / 0.87cuft                      |
| Produced in:  | Taiwan                                      |

**DA-32 (ISO 4210)**

3D forged AL6061, 4-bolt ahead stem

|               |                                             |
|---------------|---------------------------------------------|
| Extension:    | 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm |
| Rise:         | ±10°                                        |
| Bar bore:     | Ø25.4 / Ø31.8mm                             |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                             |
| Stack height: | 40mm                                        |
| Weight:       | 173g; Ø31.8 x 110mm ext.                    |
| Finish:       | Black / Silver / Anodized / S.B. color      |
| Packing:      | 50pcs / ctn / 0.87cuft                      |
| Produced in:  | Taiwan                                      |

**DA-2038**

4-bolt ahead stem

|              |                                        |
|--------------|----------------------------------------|
| Material:    | Forged AL6061                          |
| Extension:   | 35mm                                   |
| Bar bore:    | Ø35mm                                  |
| Weight:      | 178g                                   |
| Finish:      | Black / Silver / Anodized / S.B. color |
| Packing:     | 50pcs / ctn / 0.87cuft                 |
| Produced in: | Taiwan                                 |

**EKRC**

BOSCH KIOX Remote Holder (Clamp)

|              |                                 |
|--------------|---------------------------------|
| Material:    | Forged AL6061                   |
| Clamp I.D.:  | Ø31.8mm                         |
| Weight:      | 17.7g                           |
| Finish:      | S.B. with Matte Black Anodizing |
| Packing:     | 500pcs / ctn / 0.52cuft         |
| Produced in: | Taiwan                          |

**EKDF**

Bosch Kiox display holder screw on stem DA-205 front plate with front light mounting provided

|              |                                 |
|--------------|---------------------------------|
| Material:    | Forged AL6061                   |
| Pitch:       | 22.5mm                          |
| Weight:      | 32.456g                         |
| Finish:      | S.B. with Matte Black Anodizing |
| Packing:     | 200pcs / ctn / 1.94cuft         |
| Produced in: | Taiwan                          |



## MA-50

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy                                |
| Extension:    | Ø25.4: 40mm<br>Ø31.8: 40 / 60 / 80mm |
| Rise:         | 10°                                  |
| Bar bore:     | Ø31.8 / Ø25.4mm                      |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                      |
| Stack height: | 45mm                                 |
| Weight:       | 238g; Ø31.8 x 60mm ext.              |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 50pcs / ctn / 0.87cuft               |
| Produced in:  | China                                |



MA-410

## MA-410/MA-411

Alloy + AL6061 cold forged cap

|               |                                      |
|---------------|--------------------------------------|
| Extension:    | 60 / 75 / 90 / 105mm                 |
| Rise:         | ±8°                                  |
| Bar bore:     | Ø31.8mm                              |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                      |
| Stack height: | 40mm                                 |
| Weight:       | 139g; Ø31.8 x 90mm ext.              |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 50pcs / ctn / 0.87cuft               |
| Produced in:  | China                                |



MA-411

## MA-409

Alloy + AL6061 cold forged cap

|               |                                      |
|---------------|--------------------------------------|
| Extension:    | 75 / 90 / 105mm                      |
| Rise:         | ±8°                                  |
| Bar bore:     | Ø31.8mm                              |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                      |
| Stack height: | 40mm                                 |
| Weight:       | 147g; Ø31.8 x 90mm ext.              |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 50pcs / ctn / 0.87cuft               |
| Produced in:  | China                                |



## MA-408

Alloy + AL6061 cold forged cap

|               |                                      |
|---------------|--------------------------------------|
| Extension:    | 60 / 75 / 90 / 105mm                 |
| Rise:         | ±20°: 60mm<br>±15°: 75 / 90 / 105mm  |
| Bar bore:     | Ø25.4mm                              |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                      |
| Stack height: | 40mm                                 |
| Weight:       | 88.5g; Ø25.4 x 60mm ext.             |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 50pcs / ctn / 0.87cuft               |
| Produced in:  | China                                |







MA-47



MA-471

## MA-47/MA-471

|               |                                                                      |
|---------------|----------------------------------------------------------------------|
| Material:     | Alloy                                                                |
| Extension:    | 90 / 110 / 130mm                                                     |
| Rise:         | 10°                                                                  |
| Bar bore:     | Ø31.8mm                                                              |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                                                      |
| Stack height: | 40mm                                                                 |
| Weight:       | MA-47: 319g; Ø31.8 x 110mm ext.<br>MA-471: 240.8g; Ø31.8 x 90mm ext. |
| Finish:       | Black / Silver / Powder coated color                                 |
| Packing:      | 50pcs / ctn / 0.87cuft                                               |
| Produced in:  | China                                                                |



## MA-45

|                 |                                                                            |
|-----------------|----------------------------------------------------------------------------|
| Material:       | Alloy                                                                      |
| Rise/Extension: | 10°: 60 / 75 / 90 / 110mm<br>20°: 70 / 80 / 100 / 120mm<br>40°: 90 / 110mm |
| Bar bore:       | Ø25.4mm                                                                    |
| Clamp I.D.:     | Ø25.4 / Ø28.6mm                                                            |
| Stack height:   | 40mm                                                                       |
| Weight:         | 207g; Ø25.4 x 110mm ext.                                                   |
| Finish:         | Black / Silver / Powder coated color                                       |
| Packing:        | 50pcs / ctn / 0.87cuft                                                     |
| Produced in:    | China                                                                      |



## MA-400

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Aluminum Alloy                       |
| Extension:    | 60 / 80 / 90 / 100mm                 |
| Rise:         | 8°                                   |
| Bar bore:     | Ø25.4 / Ø31.8mm                      |
| Clamp I.D.:   | Ø28.6mm                              |
| Stack height: | 37mm                                 |
| Weight:       | 206g; Ø31.8 x 90mm ext.              |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 50pcs / ctn / 0.87cuft               |
| Produced in:  | China                                |

## SPACER WASHER

### AW-8

|              |                   |
|--------------|-------------------|
| Material:    | Aluminum alloy    |
| I.D.:        | Ø29mm             |
| O.D.:        | Ø36.3mm           |
| Height:      | 3 / 5 / 10 / 15mm |
| Finish:      | Anodized          |
| Produced in: | Taiwan            |



### AW-9

|              |                            |
|--------------|----------------------------|
| Material:    | 3K Carbon fiber composite  |
| I.D.:        | Ø25.6 / Ø28.8mm            |
| O.D.:        | Ø31.5 / Ø34 / Ø35mm        |
| Height:      | 3 / 5 / 8 / 10 / 15 / 20mm |
| Produced in: | Taiwan                     |





### MA-512-8 (EN 15194)

Tool-free adjustable ahead stem

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy + Forge ahead (6061-T6)        |
| Angle:        | 90°~160°                             |
| Extension:    | 110mm                                |
| Bar bore:     | Ø31.8mm                              |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                      |
| Stack height: | 40mm                                 |
| Weight:       | 472g ; Ø28.6 x 110mm ext.            |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 50pcs / ctn / 0.87cuft               |
| Produced in:  | Taiwan                               |



### MA-512 (EN 15194)

Tool-free adjustable ahead stem

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy + Forged ahead (6061-T6)       |
| Angle:        | 90°~160°                             |
| Extension:    | 110mm                                |
| Bar bore:     | Ø25.4mm                              |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                      |
| Stack height: | 40mm                                 |
| Weight:       | 432g; Ø28.6 x 110mm ext.             |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 50pcs / ctn / 0.87cuft               |
| Produced in:  | Taiwan                               |



### MA-583 (ISO 4210 C)

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy / nylon                        |
| Angle:        | 90°~160°                             |
| Extension:    | 110mm                                |
| Bar bore:     | Ø31.8mm                              |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                      |
| Stack height: | 40mm                                 |
| Weight:       | 505g; Ø28.6 x 110mm ext.             |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 30pcs / ctn / 0.68cuft               |
| Produced in:  | Taiwan                               |



### MA-579 (ISO 4210 C)

Tool-free adjustable ahead stem

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy                                |
| Angle:        | 90°~160°                             |
| Extension:    | 110mm                                |
| Bar bore:     | Ø25.4mm                              |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                      |
| Stack height: | 40mm                                 |
| Weight:       | 450g; Ø28.6 x 110mm ext.             |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 30pcs / ctn / 0.68cuft               |
| Produced in:  | Taiwan                               |

**MA-573 (ISO 4210 C)**

Alloy body with reinforcement nylon QR

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy / nylon                        |
| Angle:        | 90°~160°                             |
| Extension:    | 110mm                                |
| Bar bore:     | Ø25.4mm                              |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                      |
| Stack height: | 40mm                                 |
| Weight:       | 505g; Ø28.6x 110mm ext.              |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 30pcs / ctn / 0.8cuft                |
| Produced in:  | Taiwan                               |

**MA-574 (S) ELC (EN15194)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

**Compatible With TOKEN Headset Cable Box System**

|               |                                        |
|---------------|----------------------------------------|
| Material:     | Forged AL6061                          |
| Angle:        | 90°~140°                               |
| Extension:    | MA-574ELC: 110mm<br>MA-574SELC: 90mm   |
| Bar bore:     | Ø35mm                                  |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                        |
| Stack height: | 40mm                                   |
| Weight:       | 515g; Ø28.6 x 110mm ext.               |
| Finish:       | Black / Silver / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.87cuft                 |
| Produced in:  | Taiwan                                 |

**MA-574 (S) (EN15194)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|               |                                        |
|---------------|----------------------------------------|
| Material:     | Forged AL6061                          |
| Angle:        | 90°~140°                               |
| Extension:    | MA-574: 110mm<br>MA-574S: 90mm         |
| Bar bore:     | Ø35mm                                  |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                        |
| Stack height: | 40mm                                   |
| Weight:       | MA-574: 454g; Ø28.6 x 110mm ext.       |
| Finish:       | Black / Silver / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.87cuft                 |
| Produced in:  | Taiwan                                 |

**NEW****MA-544A (EN15194)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

**Compatible With SP CONNECT System****Compatible With ACROS Headset ICR OR TOKEN Headset Cable Box System**

|               |                                                |
|---------------|------------------------------------------------|
| Material:     | Forged AL6061                                  |
| Angle:        | 90°~140°                                       |
| Extension:    | 70 / 90 / 110mm                                |
| Bar bore:     | Ø31.8mm                                        |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                                |
| Stack height: | 40mm                                           |
| Weight:       | EX.70mm: 440g / EX.90mm: 502g / EX.110mm: 554g |
| Finish:       | Black / Silver / Anodized / S.B. color         |
| Packing:      | 50pcs / ctn / 0.87cuft                         |
| Produced in:  | Taiwan                                         |





## MA-544 (EN15194)

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

Compatible With SP CONNECT System

|               |                                                 |
|---------------|-------------------------------------------------|
| Material:     | Forged AL6061                                   |
| Angle:        | 90°~140°                                        |
| Extension:    | 70 / 90 / 110mm                                 |
| Bar bore:     | Ø31.8mm                                         |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                                 |
| Stack height: | 40mm                                            |
| Weight:       | EX.70mm: 407g / EX.90mm: 469g / EX. 110mm: 521g |
| Finish:       | Black / Silver / Anodized / S.B. color          |
| Packing:      | 50pcs / ctn / 0.87cuft                          |
| Produced in:  | Taiwan                                          |



## MA-504ELC (EN15194)

Compatible With TOKEN Headset Cable Box System

|               |                                       |
|---------------|---------------------------------------|
| Material:     | Forged AL6061                         |
| Angle:        | 90°~140°                              |
| Extension:    | 80 / 90 / 100 / 110 / 120mm           |
| Bar bore:     | Ø31.8mm                               |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                       |
| Stack height: | 40mm                                  |
| Weight:       | 435.5g; Ø28.6 x 110mm ext.            |
| Finish:       | Black / Silver / Anodized / S.B.Color |
| Packing:      | 50pcs / ctn / 0.87cuft                |
| Produced in:  | Taiwan                                |



MA-504EL



MA-504EL+Gap Tightening Device

## MA-504EL (EN15194)

### MA-504EL+Gap Tightening Device (EN15194)

|               |                                        |
|---------------|----------------------------------------|
| Material:     | Forged AL6061                          |
| Angle:        | 90°~140°                               |
| Extension:    | 80 / 90 / 100 / 110 / 120mm            |
| Bar bore:     | Ø31.8mm                                |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                        |
| Stack height: | 40mm                                   |
| Weight:       | MA-504EL: 386.4g; Ø28.6 x 110mm ext.   |
| Finish:       | Black / Silver / Anodized / S.B. Color |
| Packing:      | 50pcs / ctn / 0.87cuft                 |
| Produced in:  | Taiwan                                 |



## MA-504L (EN15194)

### (FACE PLATE WITH LIGHT MOUNT)

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|               |                                        |
|---------------|----------------------------------------|
| Material:     | Forged AL6061                          |
| Angle:        | 90°~140°                               |
| Extension:    | 80 / 90 / 100 / 110 / 120mm            |
| Bar bore:     | Ø31.8mm                                |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                        |
| Stack height: | 40mm                                   |
| Weight:       | 413g; Ø28.6 x 110mm ext.               |
| Finish:       | Black / Silver / Anodized / S.B. color |
| Packing:      | 50pcs / ctn / 0.87cuft                 |
| Produced in:  | Taiwan                                 |

**MA-504 (EN15194)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|                      |                                        |
|----------------------|----------------------------------------|
| <b>Material:</b>     | Forged AL6061                          |
| <b>Angle:</b>        | 90°~140°                               |
| <b>Extension:</b>    | 80 / 90 / 100 / 110 / 120mm            |
| <b>Bar bore:</b>     | Ø31.8mm                                |
| <b>Clamp I.D.:</b>   | Ø25.4 / Ø28.6mm                        |
| <b>Stack height:</b> | 40mm                                   |
| <b>Weight:</b>       | 413g; Ø28.6 x 110mm ext.               |
| <b>Finish:</b>       | Black / Silver / Anodized / S.B. color |
| <b>Packing:</b>      | 50pcs / ctn / 0.87cuft                 |
| <b>Produced in:</b>  | Taiwan                                 |

**MA-551 (S) (ISO 4210 C)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|                      |                                        |
|----------------------|----------------------------------------|
| <b>Material:</b>     | Forged AL6061                          |
| <b>Angle:</b>        | 90°~140°                               |
| <b>Extension:</b>    | MA-551: 110mm<br>MA-551S: 90mm         |
| <b>Bar bore:</b>     | Ø31.8mm                                |
| <b>Clamp I.D.:</b>   | Ø25.4 / Ø28.6mm                        |
| <b>Stack height:</b> | 40mm                                   |
| <b>Weight:</b>       | MA-551: 272g; Ø28.6 x 110mm ext.       |
| <b>Finish:</b>       | Black / Silver / Anodized / S.B. color |
| <b>Packing:</b>      | 50pcs / ctn / 0.87 cuft                |
| <b>Produced in:</b>  | Taiwan                                 |



MA-595

MA-589

**MA-595 (S) (ISO 4210 C)****MA-589 (S) (ISO 4210 C)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|                      |                                                   |
|----------------------|---------------------------------------------------|
| <b>Material:</b>     | Forged AL6061                                     |
| <b>Angle:</b>        | 90°~140°                                          |
| <b>Extension:</b>    | MA-595 / MA-589: 110mm<br>MA-595S / MA-589S: 90mm |
| <b>Bar bore:</b>     | MA-595(S): Ø31.8mm<br>MA-589(S): Ø25.4 / Ø31.8mm  |
| <b>Clamp I.D.:</b>   | Ø25.4 / Ø28.6mm                                   |
| <b>Stack height:</b> | 40mm                                              |
| <b>Weight:</b>       | MA-595: 283g; Ø28.6 x 110mm ext.                  |
| <b>Finish:</b>       | Black / Silver / Anodized / S.B. color            |
| <b>Packing:</b>      | 50pcs / ctn / 0.87cuft                            |
| <b>Produced in:</b>  | Taiwan                                            |

**MA-584 (S) (EN15194)**

|                      |                                                                      |
|----------------------|----------------------------------------------------------------------|
| <b>Material:</b>     | Alloy                                                                |
| <b>Angle:</b>        | 90°~140°                                                             |
| <b>Extension:</b>    | MA-584: 110mm<br>MA-584S: 90mm                                       |
| <b>Bar bore:</b>     | Ø31.8mm                                                              |
| <b>Clamp I.D.:</b>   | Ø25.4 / Ø28.6mm                                                      |
| <b>Stack height:</b> | 40mm                                                                 |
| <b>Weight:</b>       | MA-584S: 504g; Ø28.6 x 90mm ext.<br>MA-584: 540g; Ø28.6 x 110mm ext. |
| <b>Finish:</b>       | Black / Silver / Powder coated color                                 |
| <b>Packing:</b>      | 50pcs / ctn / 0.87cuft                                               |
| <b>Produced in:</b>  | Taiwan                                                               |





## MA-596

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy                                |
| Angle:        | 90°~140°                             |
| Extension:    | 85 / 105mm                           |
| Bar bore:     | Ø31.8mm                              |
| Clamp I.D.:   | Ø28.6mm                              |
| Stack height: | 49mm                                 |
| Weight:       | 403g; Ø31.8 x 90mm ext.              |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 50pcs / ctn / 0.87cuft               |
| Produced in:  | China                                |



## MA-592

|               |                                                       |
|---------------|-------------------------------------------------------|
| Material:     | Alloy                                                 |
| Angle:        | 90°~140°                                              |
| Extension:    | 85 / 105mm                                            |
| Bar bore:     | Ø25.4mm                                               |
| Clamp I.D.:   | Ø28.6mm                                               |
| Stack height: | 49mm                                                  |
| Weight:       | 332.8g; Ø25.4 x 85mm ext.<br>349g; Ø25.4 x 105mm ext. |
| Finish:       | Black / Silver / Powder coated color                  |
| Packing:      | 50pcs / ctn / 0.87cuft                                |
| Produced in:  | China                                                 |



## MB-504L (EN15194)

|               |                                       |
|---------------|---------------------------------------|
| Material:     | Forged AL6061                         |
| Angle:        | 40°~140°                              |
| Extension:    | 100 / 110 / 120 / 130 / 140mm         |
| Bar bore:     | Ø31.8mm                               |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                       |
| Stack height: | 44mm                                  |
| Weight:       | 363.4g; Ø28.6 x 110mm ext.            |
| Finish:       | Black / Silver / Anodized / S.B.color |
| Packing:      | 50pcs / ctn / 1.06cuft                |
| Produced in:  | Taiwan                                |



MA-593



MA-577

## MA-593 (S)/MA-577 (S) (ISO4210 C)

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|               |                                                    |
|---------------|----------------------------------------------------|
| Material:     | Forged AL6061                                      |
| Angle:        | 40°~140°                                           |
| Extension:    | MA-593 / MA-577: 128mm<br>MA-593S / MA-577S: 108mm |
| Bar bore:     | MA-593(S): Ø31.8mm<br>MA-577(S): Ø25.4 / Ø31.8mm   |
| Clamp I.D.:   | Ø25.4 / Ø28.6mm                                    |
| Stack height: | 39mm                                               |
| Weight:       | MA-593: 259g; Ø28.6 x 128mm ext.                   |
| Finish:       | Black / Silver / Anodized / S.B. Color             |
| Packing:      | 50pcs / ctn / 1.06cuft                             |
| Produced in:  | Taiwan                                             |

**MA-597 (S) (ISO 4210 C)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|                      |                                       |
|----------------------|---------------------------------------|
| <b>Material:</b>     | Forged AL6061                         |
| <b>Angle:</b>        | 40°~140°                              |
| <b>Extension:</b>    | MA-597: 128mm<br>MA-597S: 108mm       |
| <b>Bar bore:</b>     | Ø31.8mm                               |
| <b>Clamp I.D.:</b>   | Ø25.4 / Ø28.6mm                       |
| <b>Stack height:</b> | 39mm                                  |
| <b>Weight:</b>       | MA-597: 257g; Ø28.6 x 128mm ext.      |
| <b>Finish:</b>       | Black / Silver / Anodized / S.B color |
| <b>Packing:</b>      | 50pcs / ctn / 1.06 cuft               |
| <b>Produced in:</b>  | Taiwan                                |

**MA-598S (ISO 4210 C)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|                      |                                        |
|----------------------|----------------------------------------|
| <b>Material:</b>     | Forged AL6061                          |
| <b>Angle:</b>        | 40°~140°                               |
| <b>Extension:</b>    | 108mm                                  |
| <b>Bar bore:</b>     | Ø31.8mm                                |
| <b>Clamp I.D.:</b>   | Ø25.4 / Ø28.6mm                        |
| <b>Stack height:</b> | 40mm                                   |
| <b>Weight:</b>       | 320g; Ø28.6 x 108mm ext.               |
| <b>Finish:</b>       | Black / Silver / Anodized / S.B. color |
| <b>Packing:</b>      | 50pcs / ctn / 0.87cuft                 |
| <b>Produced in:</b>  | Taiwan                                 |

**MA-570 (S) (ISO 4210 C)**

New angle adjust mechanism designed  
New side-play locking device

|                      |                                      |
|----------------------|--------------------------------------|
| <b>Material:</b>     | Alloy                                |
| <b>Angle:</b>        | 35°~145°                             |
| <b>Extension:</b>    | MA-570: 128mm<br>MA-570S: 108mm      |
| <b>Bar bore:</b>     | Ø31.8mm                              |
| <b>Clamp I.D.:</b>   | Ø25.4 / Ø28.6mm                      |
| <b>Stack height:</b> | 40mm                                 |
| <b>Weight:</b>       | MA-570S: 355g; Ø25.4 x 108mm ext.    |
| <b>Finish:</b>       | Black / Silver / Powder coated color |
| <b>Packing:</b>      | 50pcs / ctn / 0.87cuft               |
| <b>Produced in:</b>  | China                                |



MA-522



MA-521

**MA-521 (S)/MA-522 (S) (ISO 4210 C)**

|                       |                                                                      |
|-----------------------|----------------------------------------------------------------------|
| <b>Material:</b>      | MA-521(S): Alloy<br>MA-522(S): Alloy + AL6061 cold forged cap        |
| <b>Angle:</b>         | 35° ~ 145°                                                           |
| <b>Extension:</b>     | MA-521 / MA-522: 128mm<br>MA-521S / MA-522S: 108mm                   |
| <b>Bar bore.:</b>     | Ø25.4mm                                                              |
| <b>Clamp I.D.:</b>    | Ø25.4 / Ø28.6mm                                                      |
| <b>Stack height.:</b> | 40mm                                                                 |
| <b>Weight:</b>        | MA-521: 308g; Ø25.4 x 128mm ext.<br>MA-522: 304g; Ø25.4 x 128mm ext. |
| <b>Finish:</b>        | Black / Silver / Powder coated color                                 |
| <b>Packing:</b>       | 50pcs / ctn / 0.87cuft                                               |
| <b>Produced in:</b>   | Taiwan                                                               |



### MQ-512-8 (EN 15194)

Tool-free adjustable quill stem

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy + Forge quill (6061-T6)        |
| Angle:        | 90°~160°                             |
| Extension:    | 110mm                                |
| Bar bore:     | Ø31.8mm                              |
| Quill Dia:    | Ø25.4mm                              |
| Quill Length: | 180mm                                |
| Weight:       | 620g; Ø25.4 x 180mm Quill            |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 25pcs / ctn / 0.79cuft               |
| Produced in:  | Taiwan                               |



### MQ-512 (EN 15194)

Tool-free adjustable quill stem

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy + Forged quill (6061-T6)       |
| Angle:        | 90°~160°                             |
| Extension:    | 110mm                                |
| Bar bore:     | Ø25.4mm                              |
| Quill Dia:    | Ø25.4mm                              |
| Quill length: | 180mm                                |
| Weight:       | 580g; Ø25.4 x 180mm Quill            |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 25pcs / ctn / 0.79cuft               |
| Produced in:  | Taiwan                               |



### MQ-583 (ISO 4210 C)

Alloy body with reinforcement nylon QR

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy / nylon                        |
| Angle:        | 90°~160°                             |
| Extension:    | 110mm                                |
| Bar bore:     | Ø31.8mm                              |
| Quill Dia:    | Ø25.4mm                              |
| Quill length: | 180mm                                |
| Weight:       | 698g; Ø25.4 x 180mm Quill            |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 25pcs / ctn / 0.87cuft               |
| Produced in:  | Taiwan                               |



### MQ-579 (ISO 4210 C)

Tool-free adjustable quill stem

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy                                |
| Angle:        | 90°~160°                             |
| Extension:    | 110mm                                |
| Bar bore:     | Ø25.4mm                              |
| Quill Dia:    | Ø25.4mm                              |
| Quill length: | 180mm                                |
| Weight:       | 580g; Ø25.4 x 180mm Quill            |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 25pcs / ctn / 0.79cuft               |
| Produced in:  | Taiwan                               |

**MQ-573 (ISO 4210 C)**

Alloy body with reinforcement nylon QR

|               |                                      |
|---------------|--------------------------------------|
| Angle:        | 90°~160°                             |
| Extension:    | 110mm                                |
| Bar bore:     | Ø25.4mm                              |
| Quill Dia.:   | Ø25.4mm                              |
| Quill length: | 180mm                                |
| Weight:       | 698g; Ø25.4 x 180mm Quill            |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 25pcs / ctn / 0.87cuft               |
| Produced in:  | Taiwan                               |

**MQ-574 (S) L (EN 15194)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|               |                                        |
|---------------|----------------------------------------|
| Material:     | Forged AL6061                          |
| Angle:        | 90°~140°                               |
| Extension:    | MQ-574L: 110mm<br>MQ-574SL: 90mm       |
| Bar bore:     | Ø35mm                                  |
| Quill Dia:    | Ø25.4mm                                |
| Quill length: | 150 / 180 / 230mm                      |
| Weight:       | 583g; Ø25.4 x 180mm Quill              |
| Finish:       | Black / Silver / Anodized / S.B. color |
| Packing:      | 30pcs / ctn / 0.87cuft                 |
| Produced in:  | Taiwan                                 |

**MQ-574 (S) (EN 15194)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|               |                                        |
|---------------|----------------------------------------|
| Material:     | Forged AL6061                          |
| Angle:        | 90°~140°                               |
| Extension:    | MQ-574: 110mm<br>MQ-574S: 90mm         |
| Bar bore:     | Ø35mm                                  |
| Quill Dia:    | Ø25.4mm                                |
| Quill length: | 150 / 180 / 230mm                      |
| Weight:       | MQ-574: 577g; Ø25.4 x 180mm Quill      |
| Finish:       | Black / Silver / Anodized / S.B. color |
| Packing:      | 30pcs / ctn / 0.87cuft                 |
| Produced in:  | Taiwan                                 |

**MQ-504 (EN 15194)**

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|               |                                        |
|---------------|----------------------------------------|
| Material:     | Forged AL6061                          |
| Angle:        | 90°~140°                               |
| Extension:    | 80 / 90 / 100 / 110 / 120mm            |
| Bar bore:     | Ø31.8mm                                |
| Quill Dia:    | Ø25.4mm                                |
| Quill length: | 150 / 180 / 230mm                      |
| Weight:       | 567g; Ø25.4 x 180mm Quill              |
| Finish:       | Black / Silver / Anodized / S.B. color |
| Packing:      | 30pcs / ctn / 0.87cuft                 |
| Produced in:  | Taiwan                                 |



### MQ-597 (S) (ISO 4210 C)

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|               |                                       |
|---------------|---------------------------------------|
| Material:     | Forged AL6061                         |
| Angle:        | 90°~140°                              |
| Extension:    | MQ-597: 110mm<br>MQ-597S: 90mm        |
| Bar bore:     | Ø31.8mm                               |
| Quill Dia.:   | Ø25.4mm                               |
| Quill length: | 150 / 180 / 230mm                     |
| Weight:       | MQ-597: 423g; Ø25.4 x 180mm Quill     |
| Finish:       | Black / Silver / Anodized / S.B color |
| Packing:      | 30pcs / ctn / 0.87cuft                |
| Produced in:  | Taiwan                                |

### MQ-593 (S) (ISO 4210 C)

### MQ-577 (S) (ISO 4210 C)

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

|               |                                                   |
|---------------|---------------------------------------------------|
| Material:     | Forged AL6061                                     |
| Angle:        | 90°~140°                                          |
| Extension:    | MQ-593 / MQ-577: 110mm<br>MQ-593S / MQ-577S: 90mm |
| Bar bore:     | MQ-593(S): Ø31.8mm<br>MQ-577(S): Ø25.4 / Ø31.8mm  |
| Quill Dia:    | Ø25.4mm                                           |
| Quill length: | 150 / 180 / 230mm                                 |
| Weight:       | MQ-577: 435g; Ø25.4 x 180mm Quill                 |
| Finish:       | Black / Silver / Anodized / S.B. color            |
| Packing:      | 30pcs / ctn / 0.87cuft                            |
| Produced in:  | Taiwan                                            |



MQ-593

MQ-577



### MQ-584 (S) (EN 15194)

|               |                                                                         |
|---------------|-------------------------------------------------------------------------|
| Material:     | Alloy                                                                   |
| Angle:        | 90°~140°                                                                |
| Extension:    | MQ-584: 105mm<br>MQ-584S: 85mm                                          |
| Bar bore:     | Ø31.8mm                                                                 |
| Quill Dia:    | Ø25.4mm                                                                 |
| Quill length: | 180mm                                                                   |
| Weight:       | MQ-584S: 596g; Ø25.4 x 180mm Quill<br>MQ-584: 632g; Ø25.4 x 180mm Quill |
| Finish:       | Black / Silver / Powder coated color                                    |
| Packing:      | 25pcs / ctn / 0.85cuft                                                  |
| Produced in:  | Taiwan                                                                  |

### MQ-570 (S) (ISO 4210 C)

New angle adjust mechanism designed  
New side-play locking device

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy                                |
| Angle:        | 90°~155°                             |
| Extension:    | MQ-570: 105mm<br>MQ-570S: 85mm       |
| Bar bore:     | Ø31.8mm                              |
| Quill Dia.:   | Ø22.2 / Ø25.4mm                      |
| Quill length: | 180mm                                |
| Weight:       | MQ-570: 475g; Ø25.4 x 180mm Quill    |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 30pcs / ctn / 0.87cuft               |
| Produced in:  | China                                |





**MQ-565 (S) (ISO 4210 C)**

New angle adjust mechanism designed  
New side-play locking device

|                      |                                      |
|----------------------|--------------------------------------|
| <b>Material:</b>     | Alloy                                |
| <b>Angle:</b>        | 90°~155°                             |
| <b>Extension:</b>    | MQ-565: 105mm<br>MQ-565S: 85mm       |
| <b>Bar bore:</b>     | Ø25.4mm                              |
| <b>Quill Dia.:</b>   | Ø22.2 / Ø25.4mm                      |
| <b>Quill length:</b> | 180mm                                |
| <b>Weight:</b>       | MQ-565: 456.2g; Ø25.4 x 180mm Quill  |
| <b>Finish:</b>       | Black / Silver / Powder coated color |
| <b>Packing:</b>      | 30pcs / ctn / 0.87cuft               |
| <b>Produced in:</b>  | Taiwan / China                       |

**MQ-521 (S)/MQ-522 (S) (ISO 4210 C)**

|                       |                                                                        |
|-----------------------|------------------------------------------------------------------------|
| <b>Material:</b>      | MQ-521 (S): Alloy<br>MQ-522 (S): Alloy + AL6061 cold forged cap        |
| <b>Angle:</b>         | 90°~155°                                                               |
| <b>Extension:</b>     | MQ-521 / MQ-522: 105mm<br>MQ-521S / MQ-522S: 85mm                      |
| <b>Bar bore.:</b>     | Ø25.4mm                                                                |
| <b>Quill Dia.:</b>    | Ø22.2 / Ø25.4mm                                                        |
| <b>Quill length.:</b> | 180mm                                                                  |
| <b>Weight:</b>        | MQ-521: 398g; Ø25.4 x 180mm Quill<br>MQ-522: 394g; Ø25.4 x 180mm Quill |
| <b>Finish:</b>        | Black / Silver / Powder coated color                                   |
| <b>Packing:</b>       | 30pcs / ctn / 0.87cuft                                                 |
| <b>Produced in:</b>   | Taiwan                                                                 |

**MQ-522 (S)CST (ISO 4210 C)**

|                       |                                                |
|-----------------------|------------------------------------------------|
| <b>Material:</b>      | Alloy body+ AL6061 forged cap+ Stainless quill |
| <b>Angle:</b>         | 90° ~ 155°                                     |
| <b>Extension:</b>     | MQ-522CST: 105mm<br>MQ-522SCST: 85mm           |
| <b>Bar bore.:</b>     | Ø25.4mm                                        |
| <b>Quill Dia.:</b>    | Ø25.4mm                                        |
| <b>Quill length.:</b> | 150 / 180 / 210 / 230 / 250 / 300mm            |
| <b>Weight:</b>        | 660g; Ø25.4 x 105mm ext. (Quill: 300mm)        |
| <b>Finish:</b>        | Black / Silver / Powder coated color           |
| <b>Packing:</b>       | 30pcs / ctn / 0.87cuft                         |
| <b>Produced in:</b>   | Taiwan                                         |

**MQ-517 (S)CST (ISO 4210 C)**

|                      |                                                |
|----------------------|------------------------------------------------|
| <b>Material:</b>     | Alloy body+ AL6061 forged cap+ Stainless quill |
| <b>Angle:</b>        | 90°~155°                                       |
| <b>Extension:</b>    | MQ-517CST: 105mm<br>MQ-517SCST: 85mm           |
| <b>Bar bore:</b>     | Ø31.8mm                                        |
| <b>Quill Dia.:</b>   | Ø25.4mm                                        |
| <b>Quill length:</b> | 150 / 180 / 210 / 230 / 250 / 300mm            |
| <b>Weight:</b>       | 668g; Ø31.8 x 105mm ext. (Quill: 300mm)        |
| <b>Finish:</b>       | Black / Silver / Powder coated color           |
| <b>Packing:</b>      | 30pcs / ctn / 0.87cuft                         |
| <b>Produced in:</b>  | Taiwan                                         |

**MQ-580 (S) (ISO 4210 C)**

|                      |                                      |
|----------------------|--------------------------------------|
| <b>Material:</b>     | Alloy                                |
| <b>Angle:</b>        | 95°~145°                             |
| <b>Extension:</b>    | MQ-580: 105mm<br>MQ-580S: 90mm       |
| <b>Bar bore:</b>     | Ø25.4mm                              |
| <b>Quill Dia.:</b>   | Ø25.4mm                              |
| <b>Quill length:</b> | 180mm                                |
| <b>Weight:</b>       | MQ-580: 470g; Ø25.4 x 180mm Quill    |
| <b>Finish:</b>       | Black / Silver / Powder coated color |
| <b>Packing:</b>      | 25pcs / ctn / 0.87cuft               |
| <b>Produced in:</b>  | Taiwan                               |



### MQ-558 (S) (ISO 4210 C)

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy                                |
| Angle:        | 95°~145°                             |
| Extension:    | MQ-558: 105mm<br>MQ-558S: 85mm       |
| Bar bore:     | Ø25.4mm                              |
| Quill Dia.:   | Ø22.2 / Ø25.4mm                      |
| Quill length: | 150 / 180 / 210mm (Ø22.2only)        |
| Weight:       | MQ-558: 508g; Ø25.4 x 180mm Quill    |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 25pcs / ctn / 0.87cuft               |
| Produced in:  | MQ-558: China<br>MQ-558S: Taiwan     |



### MQ-536 (S) (ISO 4210 C)

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy                                |
| Angle:        | 95°~145°                             |
| Extension:    | MQ-536: 105mm<br>MQ-536S: 85mm       |
| Bar bore:     | Ø25.4mm                              |
| Quill Dia.:   | Ø22.2 / Ø25.4mm                      |
| Quill length: | 150 / 180 / 210mm (Ø22.2only)        |
| Weight:       | MQ-536: 616g; Ø25.4 x 180mm Quill    |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 25pcs / ctn / 0.85cuft               |
| Produced in:  | China                                |



MQ-527



MQ-525

### MQ-527 (S)/MQ-525 (S) (ISO 4210 C)

|               |                                                                        |
|---------------|------------------------------------------------------------------------|
| Material:     | Alloy                                                                  |
| Angle:        | 95°~145°                                                               |
| Extension:    | MQ-527 / MQ-525: 105mm<br>MQ-527S / MQ-525S: 85mm                      |
| Bar bore:     | Ø25.4mm                                                                |
| Quill Dia.:   | Ø22.2 / Ø25.4mm                                                        |
| Quill length: | 150 / 180 / 210mm (Ø22.2only)                                          |
| Weight:       | MQ-527: 538g; Ø25.4 x 180mm Quill<br>MQ-525: 568g; Ø25.4 x 180mm Quill |
| Finish:       | Black / Silver / Powder coated color                                   |
| Packing:      | 25pcs / ctn / 0.87cuft                                                 |
| Produced in:  | China                                                                  |



RQ-412

### RQ-412/RQ-418

Quill Stem for Road Bike

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy                                |
| Angle:        | -17°                                 |
| Extension:    | RQ-412: 105mm<br>RQ-418: 80mm        |
| Bar bore:     | Ø25.4mm                              |
| Quill Dia.:   | Ø22.2mm                              |
| Quill length: | RQ-412: 180mm / RQ-418: 150mm        |
| Weight:       | RQ-412: 392g / RQ-418: 351g          |
| Finish:       | Black / Silver / Powder coated color |
| Packing:      | 50pcs / ctn / 0.87cuft               |
| Produced in:  | China                                |



### MQ-514CST-5 (ISO 4210 C)

|               |                                      |
|---------------|--------------------------------------|
| Material:     | Alloy + Stainless quill              |
| Extension:    | 80mm                                 |
| Barbore:      | Ø25.4mm                              |
| Quill Dia:    | Ø25.4mm                              |
| Quill length: | 150 / 180 / 210 / 250 / 300mm        |
| Weight:       | 603g; Ø25.4 x 300mm                  |
| Finish:       | Black / Silver / Powder coated color |
| Produced in:  | Taiwan                               |



### MQ-422

**Material:** Alloy  
**Extension:** 80mm  
**Bar bore:** Ø25.4mm  
**Quill Dia.:** Ø22.2 / Ø25.4mm  
**Quill length:** 180mm  
**Weight:** 464g; Ø25.4 x 180mm  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 25pcs / ctn / 0.66cuft  
**Produced in:** China



### MQ-419

**Material:** Alloy  
**Extension:** 60 / 80 / 100mm  
**Bar bore:** Ø25.4mm  
**Quill Dia.:** Ø22.2 / Ø25.4mm  
**Quill length:** 180mm  
**Weight:** 378g; Ø22.2 x 180mm  
                     422g; Ø25.4 x 180mm  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 50pcs / ctn / 1.16cuft  
**Produced in:** Ext.: 80mm: Taiwan  
                     Ext.: 60 / 100mm: China



### MQ-46

**Material:** Alloy  
**Extension:** 85 / 105mm  
**Bar bore:** Ø25.4mm  
**Quill Dia.:** Ø22.2 / Ø25.4mm  
**Quill length:** 150 / 180mm  
**Weight:** 353g; Ø22.2 x 150mm Quill (ext.: 85mm)  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 50pcs / ctn / 0.87cuft  
**Produced in:** China



### MQ-41

For Beach Cruiser

**Material:** Alloy  
**Extension:** 85mm  
**Bar bore:** Ø25.4mm  
**Quill Dia.:** Ø21.1 / Ø22.2 / Ø25.4mm  
**Quill length:** 180mm  
**Weight:** 374g; Ø21.1 x 180mm  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 50pcs / ctn / 0.87cuft  
**Produced in:** China



### MQ-417

**Material:** Alloy  
**Extension:** 80mm  
**Bar bore:** Ø25.4mm  
**Quill Dia.:** Ø22.2 / Ø25.4mm  
**Quill length:** 175mm  
**Weight:** 366g; Ø22.2 x 175mm  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 50pcs / ctn / 1.16cuft  
**Produced in:** China



### FB-313 FB-313E (EN 15194)

|               |                        |
|---------------|------------------------|
| Material:     | Alloy                  |
| Extension:    | 0mm                    |
| Rise:         | +6°                    |
| Bar bore:     | Ø25.4mm                |
| Quill Dia:    | Ø22.2 / Ø25.4mm        |
| Quill length: | 355mm                  |
| Weight:       | 895.4g                 |
| Finish:       | Black / Silver         |
| Packing :     | 25pcs / ctn / 2.46cuft |
| Produced in:  | China                  |

### FB-314

|               |                        |
|---------------|------------------------|
| Material:     | Alloy                  |
| Extension:    | 0mm                    |
| Rise:         | +6°                    |
| Bar bore:     | Ø25.4mm                |
| Quill Dia:    | Ø22.2 / Ø25.4mm        |
| Quill length: | 355mm                  |
| Weight:       | 838g                   |
| Finish:       | Black / Silver         |
| Packing :     | 25pcs / ctn / 2.46cuft |
| Produced in:  | China                  |

### FB-306

|               |                                     |
|---------------|-------------------------------------|
| Material:     | Alloy                               |
| Extension:    | 0mm                                 |
| Bar bore:     | Ø25.4mm                             |
| Quill Dia.:   | Ø27.2 / 28.6mm                      |
| Quill length: | 210 / 215 / 220 / 250 / 270 / 320mm |
| Finish:       | Black / Silver                      |
| Produced in:  | China                               |

### FB-309

|               |                |
|---------------|----------------|
| Material:     | Alloy          |
| Rise:         | 12°            |
| Quill Dia.:   | Ø22.2 / 25.4mm |
| Quill length: | 330mm          |
| Finish:       | Black / Silver |
| Produced in:  | China          |





### BA-75

**Material:** Forged AL6061  
**Extension:** 48 / 52mm  
**Bar bore:** Ø22.2mm  
**Clamp I.D.:** Ø25.4 / Ø28.6mm  
**Stack height:** 30.5mm  
**Weight:** 275g  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 50pcs / ctn / 0.87cuft  
**Produced in:** Taiwan



### BA-73

**Material:** Forged AL6061  
**Extension:** 48 / 51 / 60mm  
**Bar bore:** Ø22.2mm  
**Clamp I.D.:** Ø25.4 / Ø28.6mm  
**Stack height:** 30.5mm  
**Weight:** 270g  
**Finish:** Black / Silver / Anodized / S.B. color  
**Packing:** 50pcs / ctn / 0.87cuft  
**Produced in:** Taiwan



BA-89

### BA-89 (S)

**Material:** Forged AL6061  
**Extension:** BA-89: 45mm  
 BA-89S: 40mm  
**Bar bore.:** Ø22.2mm  
**Clamp I.D.:** Ø25.4mm  
**Stack height.:** 26mm  
**Weight:** BA-89: 144g; 45mm  
 BA-89S: 134g; 40mm  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 50pcs / ctn / 0.87cuft  
**Produced in:** Taiwan



### BA-91

**Material:** Alloy  
**Extension:** 53.5mm  
**Bar bore:** Ø22.2mm  
**Clamp I.D.:** Ø25.4 / Ø28.6mm  
**Stack height:** 30mm  
**Weight:** Ø25.4: 408g; Ø22.2mm x 55mm  
 Ø28.6: 396g; Ø22.2mm x 55mm  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 50pcs / ctn / 0.87cuft  
**Produced in:** China



### BA-90D

**Material:** Alloy  
**Extension:** 50mm  
**Bar bore:** Ø22.2mm  
**Clamp I.D.:** Ø25.4 / Ø28.6mm  
**Stack height:** 30mm  
**Weight:** 367g; Ø22.2 x 50mm  
**Finish:** Black / Silver / Powder coated color  
**Packing:** 50pcs / ctn / 0.87cuft  
**Produced in:** China





Supernova front light



### BM-011S (EN 15194)

Compatible With Token Cable Box System head spacer & SP Connect

|               |                                                                          |
|---------------|--------------------------------------------------------------------------|
| Material:     | AL6061                                                                   |
| Bar bore:     | Ø31.8mm                                                                  |
| Back sweep:   | 9°                                                                       |
| Up sweep:     | 4°                                                                       |
| Width:        | 700 / 720 / 740 / 750 / 760 / 780mm                                      |
| Rise:         | 15mm                                                                     |
| Extension:    | 60mm                                                                     |
| Clamp I.D.:   | Ø28.6mm                                                                  |
| Stack height: | 47.6mm                                                                   |
| Weight:       | 554g: 700 / 561g: 720 / 568g: 740<br>575g: 750 / 582g: 760 / 589g: 780mm |
| Finish:       | Black / Anodized / S.B. color                                            |
| Packing:      | 25pcs / ctn / 1.9cuft                                                    |
| Produced in:  | Taiwan                                                                   |



### BM-011(L) (EN 15194)

Compatible With Token Cable Box System head spacer & SP Connect

|               |                                                                          |
|---------------|--------------------------------------------------------------------------|
| Material:     | AL6061                                                                   |
| Bar bore:     | Ø31.8mm                                                                  |
| Back sweep:   | 9°                                                                       |
| Up sweep:     | 4°                                                                       |
| Width:        | 700 / 720 / 740 / 750 / 760 / 780mm                                      |
| Rise:         | 15mm                                                                     |
| Extension:    | 60mm                                                                     |
| Clamp I.D.:   | Ø28.6mm                                                                  |
| Stack height: | 47.6mm                                                                   |
| Weight:       | 559g: 700 / 566g: 720 / 573g: 740<br>580g: 750 / 587g: 760 / 594g: 780mm |
| Finish:       | Black / Silver / Anodized / S.B. color                                   |
| Packing:      | 25pcs / ctn / 1.9cuft                                                    |
| Produced in:  | Taiwan                                                                   |



### HB-3235DBIR

|              |                                        |
|--------------|----------------------------------------|
| Material:    | AL6061                                 |
| Bar bore:    | Ø35mm                                  |
| Back sweep:  | 8°                                     |
| Up sweep:    | 4°                                     |
| Width:       | 800mm                                  |
| Rise:        | R30                                    |
| Weight:      | 345g; 800mm                            |
| Finish:      | Black / Silver / Anodized / S.B. color |
| Packing:     | 50pcs / ctn / 1.74cuft; 800mm          |
| Produced in: | Taiwan                                 |

**NEW****HB-3018DBIR**

|              |                                                          |
|--------------|----------------------------------------------------------|
| Material:    | AL6061                                                   |
| Bar bore:    | Ø31.8mm                                                  |
| Back sweep:  | 6°                                                       |
| Up sweep:    | 0°                                                       |
| Width:       | 700 / 740 / 760 / 780mm                                  |
| Weight:      | 285g; 700mm / 295g; 740mm /<br>300g; 760mm / 305g; 780mm |
| Finish:      | Black / Silver / Anodized / S.B color                    |
| Packing:     | 30pcs / ctn / 1.27cuft; 780mm                            |
| Produced in: | Taiwan                                                   |

**HB-3188DBIR**

|              |                                       |
|--------------|---------------------------------------|
| Material:    | AL6061                                |
| Bar bore:    | Ø31.8mm                               |
| Back sweep:  | 8°                                    |
| Up sweep:    | 4°                                    |
| Width:       | 780 / 800mm                           |
| Rise:        | 18mm                                  |
| Weight:      | 340g; 780mm / 350g; 800mm             |
| Finish:      | Black / Silver / Anodized / S.B color |
| Packing:     | 50pcs / ctn / 1.74cuft; 780mm         |
| Produced in: | Taiwan                                |

**HB-3057DBIR**

|              |                                                                                                       |
|--------------|-------------------------------------------------------------------------------------------------------|
| Material:    | AL6061                                                                                                |
| Bar bore:    | Ø31.8mm                                                                                               |
| Flare out:   | 16°                                                                                                   |
| Reach:       | 70mm                                                                                                  |
| Drop:        | 125mm                                                                                                 |
| Width:       | 380 / 400 / 420 / 440 / 460 / 480 / 500mm                                                             |
| Weight:      | 300g; 380mm / 307g; 400mm / 314g; 420mm /<br>321g; 440mm / 328g; 460mm / 335g; 480mm /<br>342g; 500mm |
| Finish:      | Black / Silver / Anodized / S.B color                                                                 |
| Packing:     | 20pcs / ctn / 2.96cuft; 400mm                                                                         |
| Produced in: | Taiwan                                                                                                |

**HB-3050DBIR**

|              |                                         |
|--------------|-----------------------------------------|
| Material:    | AL6061                                  |
| Bar bore:    | Ø31.8mm                                 |
| Flare out:   | 12°                                     |
| Reach:       | 65mm                                    |
| Drop:        | 130mm                                   |
| Width:       | 400 / 420 / 440mm                       |
| Weight:      | 298g; 400mm / 306g; 420mm / 314g; 440mm |
| Finish:      | Black / Silver / Anodized / S.B color   |
| Packing:     | 20pcs / ctn / 2.96cuft; 400mm           |
| Produced in: | Taiwan                                  |

BRAKE SYSTEM

HUB

SKEWER

SEAT POST

SEAT CLAMP

STEM

**HANDLEBAR**

PARTS &amp; ACCESSORIES



HB-8235DB  
HB-3235DB

|              |                                                                                   |
|--------------|-----------------------------------------------------------------------------------|
| Material:    | HB-8235DB: AL7050<br>HB-3235DB: AL6061                                            |
| Bar bore:    | Ø35mm                                                                             |
| Back sweep:  | 8°                                                                                |
| Up sweep:    | 4°                                                                                |
| Width:       | HB-8235DB: 740 / 780 / 800mm<br>HB-3235DB: 720 / 740 / 760 / 780 / 800mm          |
| Rise:        | HB-8235DB: 20 / 30 / 40mm<br>HB-3235DB: 10 / 20 / 30mm                            |
| Weight:      | HB-8235DB: 291.2; 740mm / 295.6g; 780mm / 300g; 800mm / 345g; 780mm / 350g; 800mm |
| Finish:      | Black / Silver / Anodized / S.B. color                                            |
| Packing:     | 25pcs / ctn / 1.9cuf                                                              |
| Produced in: | Taiwan                                                                            |



HB-3498DBFT DOUBLE BUTTED (FLAT TOP)  
HB-3498DB R11/R28 DOUBLE BUTTED  
HB-3498SP

|                |                                                                                                                            |           |
|----------------|----------------------------------------------------------------------------------------------------------------------------|-----------|
| Material:      | HB-3498DBFT / HB-3498DB R11 / R28: AL6061<br>HB-3498SP: Alloy                                                              |           |
| Bar bore:      | Ø34.9mm                                                                                                                    |           |
|                | Back sweep:                                                                                                                | Up sweep: |
| HB-3498DBFT:   | 6°                                                                                                                         | 0°        |
| HB-3498DB R11: | 7°                                                                                                                         | 5°        |
| HB-3498DB R28: | 9°                                                                                                                         | 5°        |
| HB-3498SP:     | -30°                                                                                                                       | 0°        |
| Width:         | HB-3498DBFT: 700mm<br>HB-3498DB R11: 760mm<br>HB-3498DB R28: 780mm<br>HB-3498SP: 640 / 660 / 680 / 700 / 740 / 760 / 780mm |           |
| Rise:          | HB-3498DBFT: 6mm<br>HB-3498DB R11 / HB-3498DB R28: 15 / 30mm<br>HB-3498SP: 16mm                                            |           |
| Weight:        | HB-3498DBFT: 286g<br>HB-3498DB R11 / HB-3498DB R28: 341.3g / 345.6g<br>HB-3498SP: 320g; 640mm                              |           |
| Finish:        | Black / Silver / Anodized / S.B. color                                                                                     |           |
| Packing:       | 25pcs / ctn / 1.9cuf                                                                                                       |           |
| Produced in:   | China                                                                                                                      |           |



HB-3018DBFT DOUBLE BUTTED (FLAT TOP)  
HB-3018DB DOUBLE BUTTED  
HB-3018

|                  |                                                                                                      |
|------------------|------------------------------------------------------------------------------------------------------|
| Material:        | AL6061                                                                                               |
| Bar bore:        | Ø31.8mm                                                                                              |
| Up / Back sweep: | HB-3018DBFT: 0° / 6°, 4° / 10°<br>HB-3018DB / HB-3018: 6°                                            |
| Back sweep:      | HB-3018DBFT: 600~720mm                                                                               |
| Width:           | HB-3018DB: 560 / 580 / 600 / 620 / 640 / 660 / 680 / 700mm<br>HB-3018: 580 / 600 / 620 / 630 / 640mm |
| Weight:          | HB-3018DBFT: 306g; 700mm<br>HB-3018DB: 290g; 600mm<br>HB-3018: 305g; 600mm                           |
| Finish:          | Black / Silver / Anodized / S.B. color                                                               |
| Packing:         | 50pcs / ctn / 1.18cuf; 600mm; 1.51cuf; 660mm                                                         |
| Produced in:     | HB-3018DBFT: Taiwan (9°) / China<br>HB-3018DB: Taiwan / China<br>HB-3018: China                      |



HB-7188DB R18  
HB-3188DB R5/R15/R18/R25  
HB-3188

|                     |                                                                                                                                                                                                                                                                                              |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material:</b>    | HB-7188DB R18: AL2014<br>HB-3188 / HB-3188DB R5 / R15 / R18 / R25: AL6061                                                                                                                                                                                                                    |
| <b>Bar bore:</b>    | Ø31.8mm                                                                                                                                                                                                                                                                                      |
|                     | <b>Back sweep:</b> <b>Up sweep:</b>                                                                                                                                                                                                                                                          |
| HB-7188DB:          | R18: 8° 4°                                                                                                                                                                                                                                                                                   |
| HB-3188DB (T):      | R5 / R15: 9° ; R18 / R25: 8° 4°                                                                                                                                                                                                                                                              |
| HB-3188DB (C):      | R25: 8° 6°                                                                                                                                                                                                                                                                                   |
| HB-3188:            | 6° / 8° / 9° / 15° 0°                                                                                                                                                                                                                                                                        |
| <b>Width:</b>       | HB-7188DB R18: 740 / 780mm<br>HB-3188DB R5: 690 / 720mm<br>HB-3188DB R15 : 750 / 780mm<br>HB-3188DB R18(T): 580 / 620 / 640 / 660 / 680 / 700 / 750 / 740 / 760 / 780 / 800mm<br>HB-3188DB R18(C): 580 / 620 / 640 / 660 / 680 / 700mm<br>HB-3188: 560 / 580 / 620 / 640 / 660 / 680 / 700mm |
| <b>Rise:</b>        | HB-7188DB R18: 18mm<br>HB-3188DB R5: 5mm R15: 15mm R18: 18mm R25: 25mm<br>HB-3188 R18: 18mm R25: 25mm R30: 30mm                                                                                                                                                                              |
| <b>Weight:</b>      | HB-7188DB R18: 280 / 295g<br>HB-3188DB R5: 292 / 300g<br>HB-3188DB R15: 310 / 318g<br>HB-3188DB R18 (T): 245 / 255 / 260 / 265 / 270 / 325 / 330 / 335 / 340 / 345 / 350g<br>HB-3188DB R18 / R25 (C): R18: 221g; 600mm / R25: 256g; 620mm<br>HB-3188 : 303g; 620mm x 9°                      |
| <b>Finish:</b>      | Black / Silver / Anodized / S.B color                                                                                                                                                                                                                                                        |
| <b>Packing:</b>     | 50pcs / ctn / 1.63cuft; 740mm                                                                                                                                                                                                                                                                |
| <b>Produced in:</b> | HB-7188DB / HB-3188DB (T): Taiwan<br>HB-3188DB (C) / HB-3188: China                                                                                                                                                                                                                          |



HB-M301DB DOUBLE BUTTED  
HB-M301

|                     |                                                                                                            |
|---------------------|------------------------------------------------------------------------------------------------------------|
| <b>Material:</b>    | AL6061                                                                                                     |
| <b>Bar bore:</b>    | Ø25.4mm                                                                                                    |
| <b>Back sweep:</b>  | HB-M301DB: 8°<br>HB-M301: 3° / 6° / 8° / 9° / 15° / 20°                                                    |
| <b>Width:</b>       | HB-M301DB: 600 / 620 / 640 / 660mm<br>HB-M301: 400 / 450 / 480 / 500 / 520 / 580 / 600 / 640 / 680 / 720mm |
| <b>Weight:</b>      | HB-M301DB: 245g; 660mm<br>HB-M301: 353g; 600mm x 9°                                                        |
| <b>Finish:</b>      | Black / Silver / Anodized / S.B color                                                                      |
| <b>Packing:</b>     | HB-M301DB: 50pcs / ctn / 1.31cuft; 660mm<br>HB-M301: 50pcs / ctn / 0.86cuft; 600mm                         |
| <b>Produced in:</b> | China                                                                                                      |



Grip O.D.:19mm

**NEW**

HB-3194DB

|                     |                                                                                                                                           |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material:</b>    | AL6061                                                                                                                                    |
| <b>Bar bore:</b>    | Ø31.8mm                                                                                                                                   |
| <b>Back sweep:</b>  | 6°                                                                                                                                        |
| <b>Up sweep:</b>    | 4°                                                                                                                                        |
| <b>Width:</b>       | 440 / 480 / 500 / 520 / 540 / 560 / 580 / 600 / 620 / 640mm                                                                               |
| <b>Rise:</b>        | 22mm                                                                                                                                      |
| <b>Weight:</b>      | 170g; 440mm / 185g; 480mm / 190g; 500mm / 195g; 520mm / 200g; 540mm / 205g; 560mm / 210g; 580mm / 215g; 600mm / 220g; 620mm / 225g; 640mm |
| <b>Finish:</b>      | Black / Silver / Anodized / S.B color                                                                                                     |
| <b>Packing:</b>     | 50pcs / ctn / 1.31cuft; 600mm                                                                                                             |
| <b>Produced in:</b> | Taiwan                                                                                                                                    |

BRAKE SYSTEM

HUB

SKEWER

SEAT POST

SEAT CLAMP

STEM

**HANDLEBAR**

PARTS & ACCESSORIES



Grip O.D.: 19mm

## HB-3090SP (FT)


|              |                                        |
|--------------|----------------------------------------|
| Material:    | AL6061                                 |
| Bar bore:    | Ø31.8mm                                |
| Back sweep:  | 0°                                     |
| Up sweep:    | 3°                                     |
| Width:       | 480 / 520 / 540 / 560 / 600 / 620mm    |
| Weight:      | 212 / 220 / 224.5 / 243.5 / 251 / 256g |
| Finish:      | Black / Silver / Anodized              |
| Packing:     | 50pcs / ctn / 0.86cuf; 600mm           |
| Produced in: | China                                  |



**NEW**

## HB-3095

|              |                                  |
|--------------|----------------------------------|
| Material:    | AL6061                           |
| Bar bore:    | Ø31.8mm                          |
| Up sweep:    | 10.5°                            |
| Reach:       | 72mm                             |
| Drop:        | 125mm                            |
| Width:       | 400 / 420 / 440mm                |
| Weight:      | 300 / 309 / 318g                 |
| Finish:      | Black / Silver / Anodized        |
| Packing:     | 20pcs / ctn / 3.37cuf; 400~420mm |
| Produced in: | China                            |

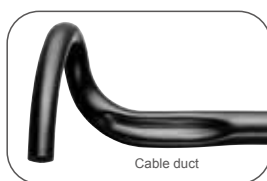

Cable duct

## HB-3057DB (FLARE-OUT 16° BENDED)

|              |                                           |
|--------------|-------------------------------------------|
| Material:    | AL6061                                    |
| Bar Bore:    | Ø31.8mm                                   |
| Reach:       | 70mm                                      |
| Drop:        | 125mm                                     |
| Width:       | 380 / 400 / 420 / 440 / 460 / 480 / 500mm |
| Weight:      | 321g; 440mm                               |
| Finish:      | Black / Silver / Anodized / S.B. color    |
| Packing:     | 30pcs / ctn / 3.31cuf; 400mm              |
| Produced in: | Taiwan                                    |



## HB-3053DB (FLARE-OUT 12° BENDED)

|              |                                           |
|--------------|-------------------------------------------|
| Material:    | AL6061                                    |
| Bar bore.:   | Ø31.8mm                                   |
| Reach.:      | 80mm                                      |
| Drop:        | 125mm                                     |
| Width:       | 380 / 400 / 420 / 440 / 460 / 480 / 500mm |
| Weight:      | 315g; 440mm                               |
| Finish:      | Black / Silver / Anodized / S.B. color    |
| Packing:     | 30pcs / ctn / 3.31cuf; 400mm              |
| Produced in: | China / Taiwan (480 & 500mm)              |



## HB-3048DB

|              |                                        |
|--------------|----------------------------------------|
| Material:    | AL6061                                 |
| Bar bore:    | Ø31.8mm                                |
| Back sweep:  | 10°                                    |
| Width:       | 380 / 400 / 420 / 440mm                |
| Rise:        | 125mm                                  |
| Weight:      | 379g; 420mm                            |
| Finish:      | Black / Silver / Anodized / S.B. color |
| Produced in: | China                                  |





### HB-3043DB DOUBLE BUTTED

**Material:** AL6061  
**Bar bore:** Ø31.8mm  
**Reach:** 80mm  
**Drop:** 120mm  
**Width:** 380 / 400 / 420 / 440mm  
**Weight:** 387g; 440mm  
**Finish:** Black / Silver / Anodized / S.B color  
**Packing:** 20pcs / ctn / 3.37cuft; 400~420mm  
**Produced in:** China




### HB-3045DB DOUBLE BUTTED

**Material:** AL6061  
**Bar bore:** Ø31.8mm  
**Reach:** 80mm  
**Drop:** 120mm  
**Width:** 380 / 400 / 420 / 440mm  
**Weight:** 375g; 440mm  
**Finish:** Black / Silver / Anodized / S.B color  
**Packing:** 30pcs / ctn / 3.31cuft; 400mm  
**Produced in:** China



### HB-3039

**Material:** AL6061  
**Option:** Alloy with Carbon Fiber Wrapped  
**Bar bore:** Ø31.8mm  
**Width:** 400 / 420 / 440mm  
**Weight:** 500g; 400mm  
**Finish:** HB-3039TP: Black / Silver / S.B color  
**Packing:** 30pcs / ctn / 3.27cuft; 400mm  
**Produced in:** China

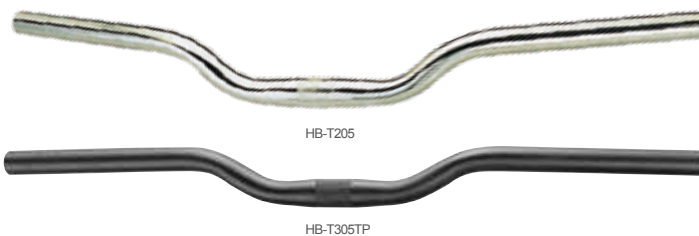

### HB-T305DB DOUBLE BUTTED HB-T305TP/HB-T305/HB-T205/HB-T205ST

**Material:** HB-T305DB / HB-T305TP / HB-T305: Alloy  
 HB-T205ST: Stainless  
 HB-T205: Hi-ten steel  
**Bar bore:** Ø25.4mm  
**Back sweep:** HB-T305DB: 8°  
 HB-T305TP: 30°  
 HB-T305 / HB-T205 / HB-T205ST: 6° / 9° / 15° / 19° / 25°  
**Up sweep:** HB-T305DB: 6°  
 HB-T305TP: -10°  
**Width:** HB-T305DB: 600 / 620 / 640mm  
 HB-T305TP: 640mm  
 HB-T305 / HB-T205 / HB-T205ST: 420 / 460 / 500 / 520 / 600 / 620 / 640 / 680 / 700 / 710mm  
**Rise:** HB-T305TP: 16mm  
**Finish:** Black / Silver / Anodized / S.B / CP color  
**Weight:** HB-T305DB: 248g; 640mm  
 HB-T305TP: 375g  
 HB-T305: 261g; 620mm x 15°  
 HB-T205: 430g; 580mm x 15°  
 HB-T205ST: 370g; 580mm x 15°  
**Packing:** HB-T305DB: 50pcs / ctn / 1.05cuft; 640mm  
 HB-T305: 50pcs / ctn / 1.36cuft; 620mm  
 HB-T205: 50pcs / ctn / 1.27cuft; 580mm  
 HB-T205ST: 20pcs / ctn / 3.96cuft; 580mm  
**Produced in:** China





NEW

## HB-3195DB

Material: AL6061  
Bar bore.: Ø31.8mm  
Back sweep: 15°  
Up sweep: 4°  
Width: 600 / 630 / 660 / 680mm  
Rise: 20mm  
Weight: 236g; 600mm / 243g; 630mm / 200g; 660mm / 255g; 680mm  
Finish: Black / Silver / Anodized / S.B.color  
Packing: 30pcs / ctn / 1.43cuft; 680mm  
Produced in: Taiwan

## HB-3188DB R22Y

Material: AL6061  
Bar bore.: Ø31.8mm  
Back sweep: 6°  
Up sweep: 4°  
Width: 440 / 460 / 480 / 560 / 640mm  
Rise: 22mm  
Weight: 200g; 440mm / 205g; 460mm / 215g; 480mm / 250g; 560mm / 270g; 640mm  
Finish: Black / Silver / Anodized / S.B.color  
Packing: 50pcs / ctn / 1.26cuft; 560mm  
Produced in: Taiwan

## HB-T323TP/HB-T323

Material: AL6061  
Bar bore.: Ø31.8mm  
Back sweep: 41°  
Width: 435 / 455mm  
Rise: 161mm  
Weight: 405g; 455mm  
Finish: Black / Silver / Anodized / S.B.color  
Produced in: China

## HB-T321DB HB-T321TP/HB-T321

Material: Alloy  
Bar bore.: Ø31.8mm  
Back Sweep: 51°  
Up Sweep: 0°  
Width: 620 / 640 / 660 / 680mm  
Rise: 21mm  
Weight: HB-T321DB: 338g; 630mm  
HB-T321TP: 388g; 630mm  
Finish: Black / Silver / Anodized / S.B.Color  
Produced in: China

## HB-T319TP

Material: Alloy  
Bar bore.: Ø31.8mm  
Back sweep: 30°  
Up sweep: -10°  
Width: 640mm  
Rise: 16mm  
Weight: 285g  
Finish: Black / Silver / Anodized / S.B.color  
Produced in: China

BRAKE SYSTEM

HUB

SKEWER

SEAT POST

SEAT CLAMP

STEM

HANDLEBAR

PARTS & ACCESSORIES

HB-T321DB



## HB-T319/HB-T219



HB-T219

|                     |                                                                                  |
|---------------------|----------------------------------------------------------------------------------|
| <b>Material:</b>    | HB-T319: Alloy<br>HB-T219: Hi-ten steel                                          |
| <b>Bar bore:</b>    | Ø25.4 / 31.8mm                                                                   |
| <b>Back sweep:</b>  | 30°                                                                              |
| <b>Up sweep:</b>    | 3°                                                                               |
| <b>Width:</b>       | 480 / 540 / 560 / 580 / 590 / 600 / 610mm                                        |
| <b>Rise:</b>        | 30 / 40mm                                                                        |
| <b>Weight:</b>      | HB-T319: 267g; 580mm<br>HB-T219: 475g; 580mm                                     |
| <b>Finish:</b>      | Black / Silver / Anodized / S.B / CP color                                       |
| <b>Packing:</b>     | HB-T319: 50pcs / ctn / 1.82cuft; 580mm<br>HB-T219: 50pcs / ctn / 1.48cuft; 580mm |
| <b>Produced in:</b> | China                                                                            |

## HB-T320/HB-T220



HB-T320

|                     |                                                                                  |
|---------------------|----------------------------------------------------------------------------------|
| <b>Material:</b>    | HB-T320: Alloy<br>HB-T220: Hi-ten steel                                          |
| <b>Bar bore:</b>    | Ø25.4mm                                                                          |
| <b>Back sweep:</b>  | 23° / 35° / 36° / 41° / 45°                                                      |
| <b>Width:</b>       | 520 / 530 / 560 / 580 / 600 / 610 / 640mm                                        |
| <b>Weight:</b>      | HB-T320: 301.8g; 600mm x 45°<br>HB-T220: 530g; 600mm x 45°                       |
| <b>Finish:</b>      | Black / Silver / Anodized / S.B / CP color                                       |
| <b>Packing:</b>     | HB-T320: 50pcs / ctn / 1.98cuft; 600mm<br>HB-T220: 30pcs / ctn / 1.49cuft; 600mm |
| <b>Produced in:</b> | China                                                                            |

## HB-T316/HB-T216



HB-T316

|                     |                                                                                  |
|---------------------|----------------------------------------------------------------------------------|
| <b>Material:</b>    | HB-T316: Alloy<br>HB-T216: Hi-ten steel                                          |
| <b>Bar bore:</b>    | Ø25.4mm                                                                          |
| <b>Back sweep:</b>  | 7° / 12°                                                                         |
| <b>Up sweep:</b>    | 3°                                                                               |
| <b>Width:</b>       | 570 / 590 / 600 / 640mm                                                          |
| <b>Weight:</b>      | HB-T316: 475g; 590mm x 7°<br>HB-T216: 837g; 590mm x 12°                          |
| <b>Finish:</b>      | Black / Silver / Anodized / S.B / CP color                                       |
| <b>Packing:</b>     | HB-T316: 25pcs / ctn / 2.67cuft; 600mm<br>HB-T216: 25pcs / ctn / 2.63cuft; 590mm |
| <b>Produced in:</b> | China                                                                            |

## HB-B201



|                     |                                                 |
|---------------------|-------------------------------------------------|
| <b>Material:</b>    | Hi-ten steel                                    |
| <b>Bar bore:</b>    | Ø22.2mm                                         |
| <b>Back sweep:</b>  | 6° / 9° / 10° / 11° / 12°                       |
| <b>Up sweep:</b>    | 1° / 2° / 3°                                    |
| <b>Width:</b>       | 560 / 580 / 630 / 635 / 650 / 660 / 680 / 740mm |
| <b>Weight:</b>      | 998g; 660mm x 6°                                |
| <b>Finish:</b>      | C.P. / Stain color                              |
| <b>Packing:</b>     | 20pcs / ctn / 2.70cuft; 660mm                   |
| <b>Produced in:</b> | China                                           |



## BE-317

Ergonomic designed for left and right hand comfort  
One-piece alloy with Kraton for the thumb comfort

|                     |                    |
|---------------------|--------------------|
| <b>Material:</b>    | Alloy              |
| <b>Length:</b>      | 105mm              |
| <b>Weight:</b>      | 142g / pair        |
| <b>Color:</b>       | Customer requested |
| <b>Produced in:</b> | Taiwan             |



## BE-315

Ergonomic designed for left and right hand comfort

|                     |                          |
|---------------------|--------------------------|
| <b>Material:</b>    | Alloy                    |
| <b>Length:</b>      | 82mm                     |
| <b>Weight:</b>      | 115g / pair              |
| <b>Finish:</b>      | Powder coated color      |
| <b>Packing:</b>     | 50pairs / ctn / 0.53cuft |
| <b>Produced in:</b> | Taiwan                   |



## BE-401H

3D forged AL6061 bar end

|                     |                          |
|---------------------|--------------------------|
| <b>Length:</b>      | 95mm                     |
| <b>Weight:</b>      | 138g / pair              |
| <b>Finish:</b>      | S.B. color               |
| <b>Packing:</b>     | 50pairs / ctn / 0.87cuft |
| <b>Produced in:</b> | Taiwan                   |

DT-160CLAE/DT-180CLAE/  
DT-203CLAE

Center Lock Disk Rotor:

Diameter: DT-160CLAE : 182g  
DT-180CLAE : 212g  
DT-203CLAE : 285gThickness: 2.3mm  
Produced in: TaiwanDT-160BE/DT-180BE/  
DT-203BEDiameter: DT-160BE: 165.6g  
DT-180BE: 194.3g  
DT-203BE: 245gThickness: 2.3mm  
Produced in: ChinaDT-140CLA/DT-160CLA/  
DT-180CLA/DT-203CLA

Center Lock Disk Rotor:

Diameter: DT-140CLA: 131g  
DT-160CLA: 154g  
DT-180CLA: 182g  
DT-203CLA: 240gThickness: 1.9mm  
Produced in: TaiwanDT-160B/DT-180B/  
DT-203B


Available in 180mm: DT-180B

Diameter: DT-160B: 130g  
DT-180B: 151.6g  
DT-203B: 190gThickness: 1.9mm  
Produced in: Taiwan

## DT-140G/DT-160G

Diameter: DT-140G: 78.3g  
DT-160G: 96gThickness: 1.9mm  
Produced in: Taiwan

\*Recommend ONLY for Road &amp; KID's bike

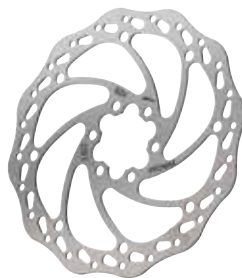DT-140H/DT-160H/  
DT-180H/DT-203HDiameter: DT-140H: 110.6g  
DT-160H: 119.8g  
DT-180H: 132.6g  
DT-203H: 184.7gThickness: 1.9mm  
Produced in: Taiwan / ChinaDT-140V/DT-160V/  
DT-180V/DT-203VDiameter: DT-140V: 94.3g  
DT-160V: 124.8g  
DT-180V: 148.1g  
DT-203V: 181gThickness: 1.9mm  
Produced in: China

## CL STEEL LOCK RING

Material: Steel  
Weight: 21.16g  
Finish: Black  
Produced in: TaiwanALUMINUM ADAPTER INCLUDING  
LOCK RING FOR 6-BOLT ROTORCL to 6S Adapter  
Weight: 41.1g  
Finish: Silver  
Produced in: Taiwan

## 806Q

MTB rear cage mount  
Aluminum clamp for MTB bike  
Clamp I.D.: Ø27.2 / Ø30.9 / Ø31.6mm  
Weight: 22.84g; Ø27.2  
18.08g; Ø30.9  
17.48g; Ø31.6  
Finish: Black / Anodized  
Packing: 250pcs / ctn / 0.66cuft  
Produced in: Taiwan

## GRIP CLAMP



## 809Q

Aluminum grip clamp for Promax grip  
Forged aluminum  
Clamp I.D.: Ø22.4mm  
Weight: 13g  
Finish: Black  
Packing: 250pcs / ctn / 0.66cuft  
Produced in: Taiwan

## PROMAX



### PD071S

AVID BB5  
PROMAX DSK-310 / Render /  
Render R / DSK-300 / DSK-300R /  
DSK-330R / DSK-330



### PD06S

PROMAX DC400



### PD070S

HAYES Mag / MX1 / HFX9  
PROMAX DC600



### PD096S

AVID BB7 and Juicy 5 / 7  
PROMAX DC905 / DC907 / DC908



### PD243S

SHIMANO M8120 / M7120 / M6120  
PROMAX DSK-930



### PD099S

SHIMANO Deore M525 / M515 / M475  
M395 / C501 / C601  
PROMAX SOLVE / LUCID / DECODE R /  
F1 / SOLVE-ST

## SHIMANO



### PD099S

SHIMANO Deore M525 / M515 / M475 / M395 /  
C501 / C601  
PROMAX SOLVE / LUCID / DECODE R / F1 / SOLVE-ST



### PD102S

SHIMANO XTR  
M975 / 966 / 965 / Saint M800 / Hone M601 /  
Deore XT M775 / 765 / 585 / 535 / R505



### PD209S

SHIMANO XT M755  
GRIMECA System 8  
SRAM 9.0  
HOPE Mono M4



### PD259S

SHIMANO Sora



### PD252S

XTR M985 / M9000 / M8100 /  
M7100 / M6100



### PD243S

SHIMANO M8120 / M7120 / M6120  
PROMAX DSK-930



### PD097S

SHIMANO Deore M555

## AVID/SRAM



### PD071S

AVID BB5  
PROMAX DSK-310 / Render / Render R /  
DSK-300 / DSK-300R / DSK-330R / DSK-330



### PD096S

AVID BB7 and Juicy 5 / 7  
PROMAX DC905 / DC907 / DC908



### PD209S

SHIMANO XT M755  
GRIMECA System 8  
SRAM 9.0  
HOPE Mono M4



### PD256S

SRAM RED



### PD104S

AVID XX / XO Elixir



## FLAT MOUNT ADAPTER

### FLAT MOUNT FORK + FLAT MOUNT DISC BRAKE



FH140F

FH160F

FM160F


FM160R

#### Hydraulic / Mechanical Brake

| Fork and Frame Flat Mount Style |       | Rotor Size |                 |                 |
|---------------------------------|-------|------------|-----------------|-----------------|
|                                 |       | 140mm      | 160mm           | 180mm           |
| Front                           | 140mm | FH140F *   | FH160F / FM160F | —               |
|                                 | 160mm | —          | FH140F          | FH160F / FM160F |
| Rear                            | 140mm | —          | FM160R          | —               |
|                                 | 160mm | —          | —               | FM160R          |

\* Only for hydraulic brake

### M5 BOLT FOR REAR

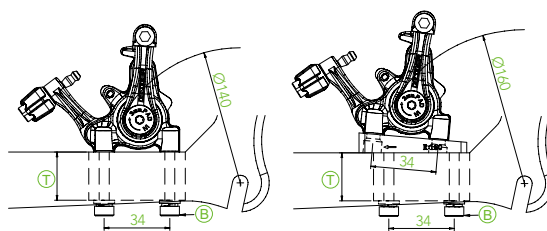

| T(Rear mount thk.)(mm) | 10 | 12 | 15 | 20 | 25 | 30 | 35 |
|------------------------|----|----|----|----|----|----|----|
| B(Bolt length)(mm)     | 21 | 23 | 26 | 31 | 36 | 41 | 46 |

## POST MOUNT



PM180

PM203D

### FLAT MOUNT FORK / FRAME + POST MOUNT DISC BRAKE



FP140F

FP160F

FP180F

FP140R

FP160R

FP170R

### POST MOUNT FORK + FLAT MOUNT DISC BRAKE



PF160

PF180

#### Hydraulic / Mechanical Brake

| Fork and Frame Post Mount Style | Rotor Size |             |             |
|---------------------------------|------------|-------------|-------------|
|                                 | 140mm      | 160mm       | 180mm       |
| 140mm                           | PF160(0mm) | PF180(20mm) | —           |
| 160mm                           | —          | PF160(0mm)  | PF180(20mm) |

## INTERNATIONAL STANDARD



IS160F

IS160R


IS180F

IS180R

IS203F

IS203R

## BRAKE CABLE NIPPLE TYPE

| Model      | Spec. | Type |                                                                                   |
|------------|-------|------|-----------------------------------------------------------------------------------|
| CODE NO.01 | ø7x8  | MTB  |  |
| CODE NO.02 | ø7x7  | MTB  |  |
| CODE NO.03 | ø7x6  | MTB  |  |
| CODE NO.04 | ø6x11 | Road |  |
| CODE NO.05 | ø6x9  | Road |  |

## DERAILLEUR CABLE NIPPLE TYPE

| Model      | Spec.      |                                                                                     |
|------------|------------|-------------------------------------------------------------------------------------|
| CODE NO.06 | ø4.5 x 4.5 |  |
| CODE NO.07 | ø4.4 x 4.4 |  |
| CODE NO.08 | ø4 x 4     |  |

## PTFE NANO-COATING CABLE



## CABLE END CAP



## SPECS. OF INNER CABLE

| Type      | O.D.  | Material                    |
|-----------|-------|-----------------------------|
| Gearshift | 1.2mm | Galvanized steel            |
|           | 1.2mm | Stainless steel             |
|           | 1.1mm | Slick galvanized steel      |
|           | 1.1mm | Slick stainless steel       |
|           | 1.2mm | PTFE Nano-coating(color)    |
|           | 1.1mm | Ultra slick stainless steel |
|           | 1.1mm | PX slick stainless steel    |
|           | 1.1mm |                             |

## RUBBER O-RINGS



| Type  | O.D.  | Material                 |
|-------|-------|--------------------------|
| Brake | 1.6mm | Galvanized steel         |
|       | 1.5mm | Galvanized steel         |
|       | 1.5mm | Stainless steel          |
|       | 1.5mm | Slick galvanized steel   |
|       | 1.5mm | Slick stainless steel    |
|       | 1.6mm | PTFE Nano-coating(color) |
|       | 1.5mm | PX slick stainless steel |
|       | 1.5mm |                          |

## HOUSING FERRULES



**NF-501AP**  
ø5mm alloy nosed ferrule



**NF-502P**  
ø5mm plastic nosed ferrule



**NF-402RP**  
ø4mm plastic nosed ferrule with raincoat for SIS-SP40 shift cables



**CF-407AK**  
ø4mm alloy shifter ferrules (Kollars)

---



**CF-501BK**  
ø5mm brass machined shifter ferrules (Kollars)



**CF-503B**  
ø5mm regular ferrule for 2P cable housing



**CF-504B**  
ø5mm brass ferrule for 2P cable housing



**CF-501PK**  
ø5mm plastic shifter ferrule (Kollars)

---



**CF-401PK**  
ø4mm plastic shifter ferrule (Kollars)



**CF-401BK**  
ø4mm brass machined shifter ferrules (Kollars)



**CF-511A**  
ø5mm alloy shifter ferrules



**CF-408P**  
ø4mm plastic shifter ferrules



**TT-01R**  
Material: Plastic  
Weight: 0.92g  
Finish: Black / White / Yellow / Red  
Produced in: China




**ECF-01R**  
Material: Plastic  
Weight: 0.47g  
Finish: Black / White / Yellow / Red  
Produced in: China



**CA-01/CA-02**  
Derailleur cable inline adjuster  
For 4mm and 5mm end caps  
Material: Alloy  
Weight: CA-01:5.6g / CA-02:4g  
Finish: Silver / Black / Gray / Anodized  
Produced in: Taiwan





| Part Number                                                                       | Ø5 / Ø4     | Color              | Panton No. | Part Number                                                                       | Ø5 / Ø4     | Color            | Panton No.    | Specification  |
|-----------------------------------------------------------------------------------|-------------|--------------------|------------|-----------------------------------------------------------------------------------|-------------|------------------|---------------|----------------|
|  | 111B / 211B | Darkred            | P199C      |  | 117A / 217A | White            |               | For Brake      |
|  | 111E / 211E | Red                | P185C      |  | 117B / 217B | Silver           | PCool Gray5C  |                |
|  | 111D / 211D | Pink               | P232C      |  | 117C / 217C | Darkgray         | PCool Gray8C  |                |
|  | 111F / 211F | Hotpink            | P806C      |  | 118A / 218A | Black            | PBlack6C      |                |
|  | 112A / 212A | Orange             | P171C      |  | 118C / 218C | Slategray        | PCool Gray10C |                |
|  | 112B / 212B | Orangered          | P811C      |  | 121B / 221B | Laser Red        |               |                |
|  | 112C / 212C | Chocolate          | P1595C     |  | 123A / 223A | Laser Gold       |               |                |
|  | 113A / 213A | Yellow             | P106C      |  | 125B / 225B | Laser Blue       |               |                |
|  | 113D / 213D | Fluorescent yellow | P389C      |  | 127D / 227D | Laser Silver     |               |                |
|  | 113E / 213E | Saddlebrown        | P161C      |  | 131A / 231A | Braided Red      |               | For Derailleur |
|  | 114A / 214A | Yellowgreen        | P367C      |  | 133A / 233A | Braided Gold     |               |                |
|  | 114D / 214D | Springgreen        |            |  | 135A / 235A | Braided Blue     |               |                |
|  | 114E / 214E | Mediumseagreen     |            |  | 137A / 237A | Braided Silver   |               |                |
|  | 115B / 215B | Blue               | P2945C     |  | 138A / 238A | Braided Black    |               |                |
|  | 115C / 215C | Darkblue           | P287C      |  | 138B / 238B | Braided Darkgray |               |                |
|  | 116A / 216A | Purple             | P2587C     |                                                                                   |             |                  |               |                |

| Part Number                                                                         | Color | Part Number                                                                         | Color | Specification |
|-------------------------------------------------------------------------------------|-------|-------------------------------------------------------------------------------------|-------|---------------|
|    | 121A  |    | 152A  | For Brake     |
|    | 123B  |    | 153A  |               |
|  | 124A  |  | 155A  |               |
|  | 126A  |  | 157A  |               |
|  | 127B  |  | 158A  |               |

**CT-387**

Length: 54mm

- Replacement pads for cartridge brake
- Compatible with Shimano 105, Ultegra&Dura-Ace.
- Produced in: Taiwan

**CT-360**

- Forged aluminum cartridge pad
- CNC windows to reduce weight.
- Produced in: Taiwan

**CT-358W**

Length: 54mm

**CT-320**

Length: 54mm

**CT-321**

Length: 54mm

**462**

Length: 53mm

**CT-378W**

Length: 70mm

**CT-380**

Length: 70mm

**CT-370W**

Length: 70mm

**Cartridge Brake**

Pads color: to order

**285WA**

Length: 70mm

**280UW**

Length: 65mm

**288MW**

Length: 73mm

**289MW**

Length: 73mm

**279 PAD (70mm)**

- Efficient texture design assists water and dirt removed the rim
- Produced in: Taiwan

**NEW 253NW**

Length: 70mm

**NEW 272MW**

Length: 70mm

**NEW 268MW**

Length: 60mm

**NEW 307MW**

Length: 55mm

**NEW 259**

Length: 47mm

**251**

Length: 50mm



